

## DS-3E0326P-E(C) 100 Mbps Long Range PoE Switch

DS-3E0326P-E(C) switches are layer 2 100 Mbps PoE switches, providing advanced PoE power supply technology and Gigabit networks design on the basis of high-performance access to ensure stable data upload. The switches support long range, port isolation, and PoE watchdog function.



### Key Feature

- Intelligent PoE management.
- Up to 300 m long range PoE transmission.
- Port isolation to improve network security.
- 6 KV surge protection to improve reliability in harsh environment.
- PoE watchdog to auto-detect and restart cameras that do not respond.




## ▪ Specification

	Model	DS-3E0326P-E(C)
<b>Network Parameters</b>	Port Number	24 × 100 Mbps PoE RJ45 ports, 2 × gigabit combos
	Port Type	RJ45 port, full duplex, MDI/MDI-X adaptive
	Standard	IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE 802.3ab
	Forwarding Mode	Store-and-forward switching
	Working Mode	Standard mode (default), Extend mode, Isolation mode, PoE watchdog mode
	High Priority Ports	Ports 1 to 8
	Ports for Long-Distance Transmission	Ports 17 to 24
	MAC Address Table	16 K
	Switching Capacity	8.8 Gbps
	Packet Forwarding Rate	6.5472 Mpps
	Internal Cache	4 Mbits
<b>PoE Power Supply</b>	PoE Standard	Ports 1 to 8: IEEE 802.3af, IEEE 802.3at
	PoE Power Pin	Ports 1 to 24: Ethernet cables 1/2/3/6 and 4/5/7/8 provide power supply simultaneously.
	PoE Port	Ports 1 to 24
	Max. Port Power	Ports 1 to 16: 30 W
	PoE Power Budget	370 W
<b>Dialing Function</b>	Long Range	Ports 17 to 24: up to 300 m.
	Port Isolation	Ports 1 to 24: port isolation mode to improve network security.
	PoE Watchdog	Ports 1 to 24: auto detect and restart the cameras that do not respond.
<b>General</b>	Shell	Metal material
	Gross Weight	3.54 kg (7.80 lb)
	Net Weight	2.785 kg (6.14 lb)
	Dimension (W × H × D)	440 mm × 220.8 mm × 44 mm (17.32" × 8.69" × 1.73")
	Operating Temperature	-10 to 55°C (14 to 131°F)
	Storage Temperature	-40 to 85°C (-40 to 185°F)
	Operating Humidity	5% to 95% (no condensation)
	Storage Humidity	5% to 95% (no condensation)
	Power Supply	100-240V~, 50/60 Hz, 6.5 A Max
	Power Consumption in Idle	< 30 W
	Power Source	400 W
Max. Power Consumption	400 W	
<b>Approval</b>	EMC	FCC (47 CFR Part 15, Subpart B); CE-EMC (EN 55032: 2015, EN 61000-3-2: 2014, EN 61000-3-3: 2013, EN 55024: 2010 +A1: 2015); RCM (AS/NZS CISPR 32: 2015); IC (ICES-003: Issue 6, 2016)
	Safety	UL (UL 60950-1); CB (IEC 60950-1:2005 + Am 1:2009 + Am 2:2013); CE-LVD (EN 60950-1:2005 + Am 1:2009 + Am 2:2013)
	Chemistry	CE-RoHS (2011/65/EU); WEEE (2012/19/EU); Reach (Regulation (EC) No 1907/2006)

▪ **Physical Interface**



Front Panel:

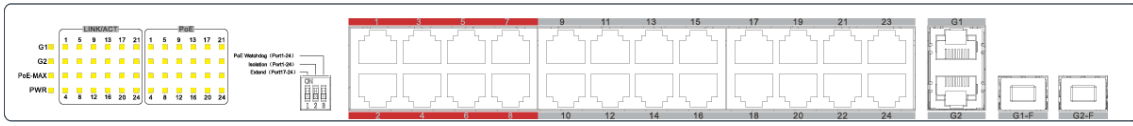

Rear Panel:




▪ **Dimension (unit: mm)**

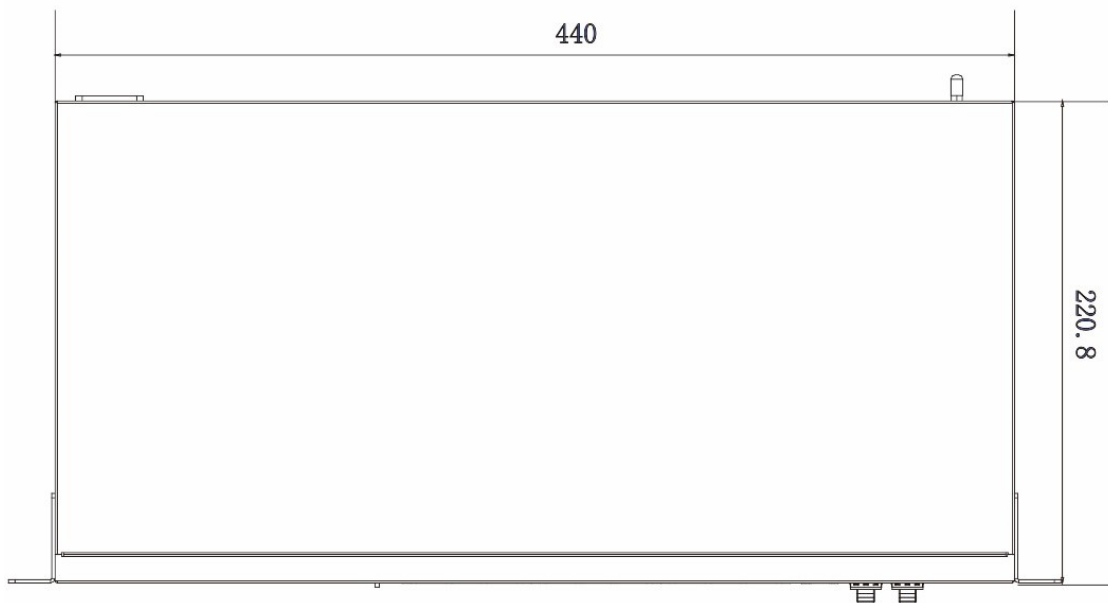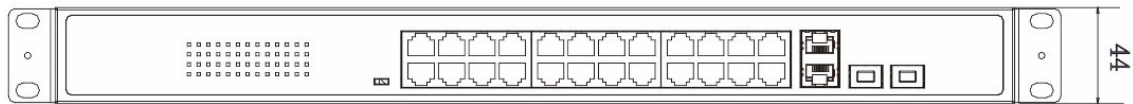

▪ **Available Model**

DS-3E0326P-E(C)

## Typical Application

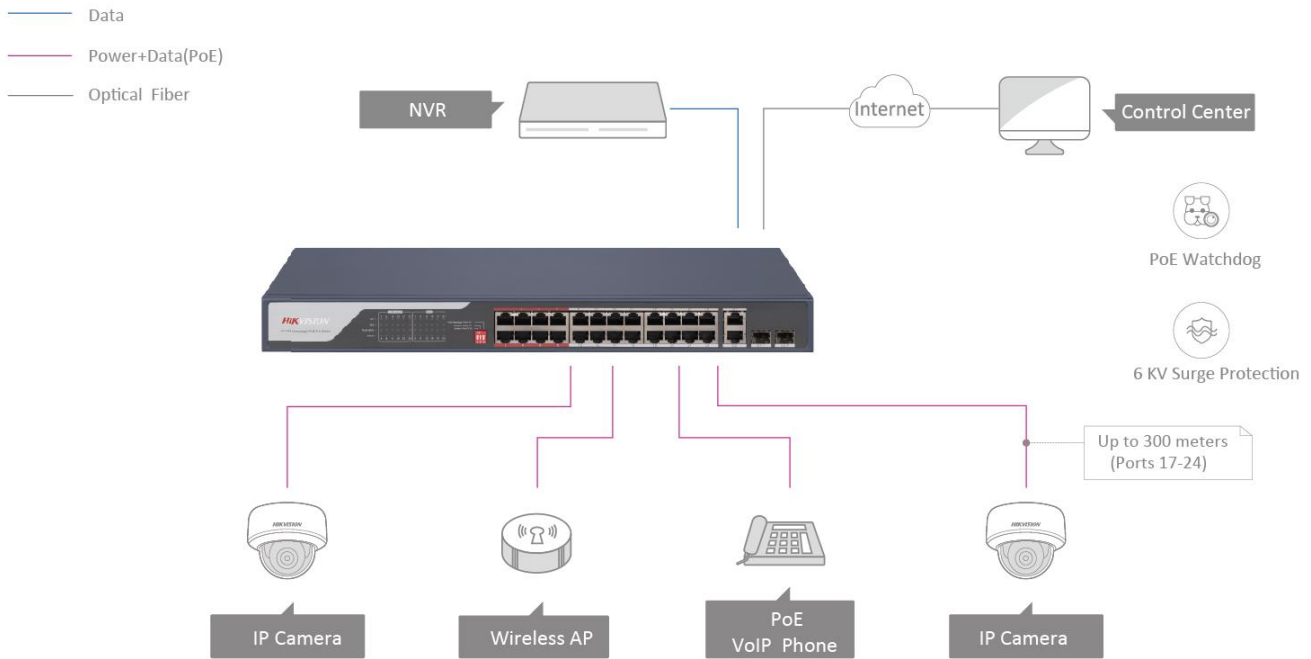

**24-Port 10/100M PoE  
10/100M Unmanaged PoE Pro-Series**

Distributed by



## HIKVISION®

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**HIKVISION USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**HIKVISION AUSTRALIA**  
T +61-2-8599-4233  
salesau@hikvision.com

**HIKVISION INDIA**  
T +91-22-28469900  
sales@pramahikvision.com

**HIKVISION CANADA**  
T +1-866-200-6690  
sales.canada@hikvision.com

**HIKVISION THAILAND**  
T +662-275-9949  
sales.thailand@hikvision.com

**HIKVISION EUROPE**  
T +31-23-5542770  
sales.eu@hikvision.com

**HIKVISION ITALY**  
T +39-0438-6902  
info.it@hikvision.com

**HIKVISION BRAZIL**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**HIKVISION TURKEY**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**HIKVISION MALAYSIA**  
T +601-7652-2413  
sales.my@hikvision.com

**HIKVISION UK & IRELAND**  
T +01628-902140  
sales.uk@hikvision.com

**HIKVISION SOUTH AFRICA**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**HIKVISION FRANCE**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**HIKVISION KAZAKHSTAN**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**HIKVISION VIETNAM**  
T +84-974270888  
sales.vt@hikvision.com

**HIKVISION UAE**  
T +971-4-4432090  
salesme@hikvision.com

**HIKVISION SINGAPORE**  
T +65-6684-4718  
sg@hikvision.com

**HIKVISION SPAIN**  
T +34-91-737-16-55  
info.es@hikvision.com

**HIKVISION TASHKENT**  
T +99-87-1238-9438  
uzb@hikvision.ru

**HIKVISION HONG KONG**  
T +852-2151-1761  
info.hk@hikvision.com

**HIKVISION RUSSIA**  
T +7-495-669-67-99  
saleru@hikvision.com

**HIKVISION KOREA**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**HIKVISION POLAND**  
T +48-22-460-01-50  
info.pl@hikvision.com

**HIKVISION INDONESIA**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**HIKVISION COLOMBIA**  
sales.colombia@hikvision.com