


Ruijie Reyee RG-EG Series Routers

ReyeeOS 1.206

Web-based Configuration Guide

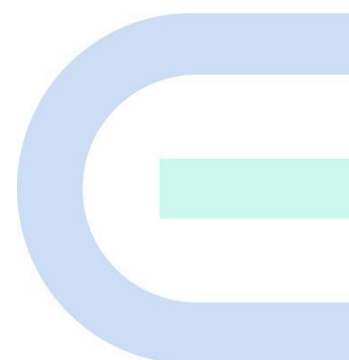

Copyright

Copyright © 2022 Ruijie Networks

All rights are reserved in this document and this statement.

Any reproduction, excerption, backup, modification, transmission, translation, or commercial use of this document or any portion of this document, in any form or by any means, without the prior written consent of Ruijie Networks is prohibited.



and other Ruijie networks logos are trademarks of Ruijie Networks.

All other trademarks or registered trademarks mentioned in this document are owned by their respective owners.

Disclaimer

The products, services, or features you purchase are subject to commercial contracts and terms. Some or all of the products, services or features described in this document may not be within the scope of your purchase or use. Unless otherwise agreed in the contract, Ruijie Networks does not make any express or implied statement or guarantee for the content of this document.

Due to product version upgrades or other reasons, the content of this document will be updated from time to time. Ruijie Networks reserves the right to modify the content of the document without any notice or prompt.

This manual is for reference only. Ruijie Networks endeavors to ensure content accuracy and will not shoulder any responsibility for losses and damages caused due to content omissions, inaccuracies or errors.

Preface

Intended Audience

This document is intended for:

- Network engineers
- Technical support and servicing engineers
- Network administrators

Technical Support

- Official website of Ruijie Reye: <https://www.ruijienetworks.com/products/reye>
- Technical Support Website: <https://ruijienetworks.com/support>
- Case Portal: <https://caseportal.ruijienetworks.com>
- Community: <https://community.ruijienetworks.com>
- Technical Support Email: service_rj@ruijienetworks.com

Conventions

1. GUI Symbols

Interface symbol	Description	Example
Boldface	<ol style="list-style-type: none">1. Button names2. Window names, tab name, field name and menu items3. Link	<ol style="list-style-type: none">1. Click OK.2. Select Config Wizard.3. Click the Download File link.
>	Multi-level menus items	Select System > Time .

2. Signs

The signs used in this document are described as follows:

Warning

An alert that calls attention to important rules and information that if not understood or followed can result in data loss or equipment damage.

Caution

An alert that calls attention to essential information that if not understood or followed can result in function failure or performance degradation.

Note

An alert that contains additional or supplementary information that if not understood or followed will not lead to serious consequences.

 **Specification**

An alert that contains a description of product or version support.

3. Note

This manual introduces the product model, port type and CLI for your reference. In case of any discrepancy or inconsistency between the manual and the actual version, the actual version prevails.

1 Login

1.1 Configuration Environment Requirements

1.1.1 PC

- Browser: Google Chrome, Internet Explorer 9.0, 10.0, and 11.0, and some Chromium/Internet Explorer kernel-based browsers (such as 360 Extreme Explorer) are supported. Exceptions such as garble or format error may occur if an unsupported browser is used.
- Resolution: 1024 x 768 or a higher resolution is recommended. If other resolutions are used, the page fonts and formats may not be aligned, the GUI is less artistic, or other exceptions may occur.

1.2 Default Configuration

Table 1-1 Default Web Configuration

Item	Default
IP address	192.168.110.1
Username/Password	Username and password are not required at your first login and you can configure the router directly.

1.3 Login to Eweb

1.3.1 Connecting to the Router

You can open the management page and complete Internet access configuration only after connecting a client to the router in either of the following ways:

- Wired Connection

Connect a local area network (LAN) port of the router to the network port of the PC, and set the IP address of the PC. See Section [1.3.2 Configuring the IP Address of the Management Client](#) for details.

- Wireless Connection

Connect the LAN port to the uplink port on the AP and power on the AP. On a mobile phone or laptop, search for wireless network @Ruijie-mXXXX (XXXX is the last four digits of the MAC address of each device). In this mode, you do not need to set the IP address of the management client, and you can skip the operation in Section [1.3.2 Configuring the IP Address of the Management Client](#).

1.3.2 Configuring the IP Address of the Management Client

Configure an IP address for the management client in the same network segment as the default IP address of the device (The default device IP address is 192.168.110.1, and the subnet mask is 255.255.255.0.) so that the

management client can access the device. For example, set the IP address of the management client to 192.168.110.200.


1.3.3 Login

Enter the IP address (192.168.110.1 by default) of the router in the address bar of the browser to open the login page.

Note

If the static IP address of the device is changed, or the device obtains a new dynamic IP address, the new IP address can be used to access the web management system of the device as long as the management client and the device are in the same network segment of a LAN.

-
- (1) On the web page, enter the password and click **Log In** to enter the web management system.

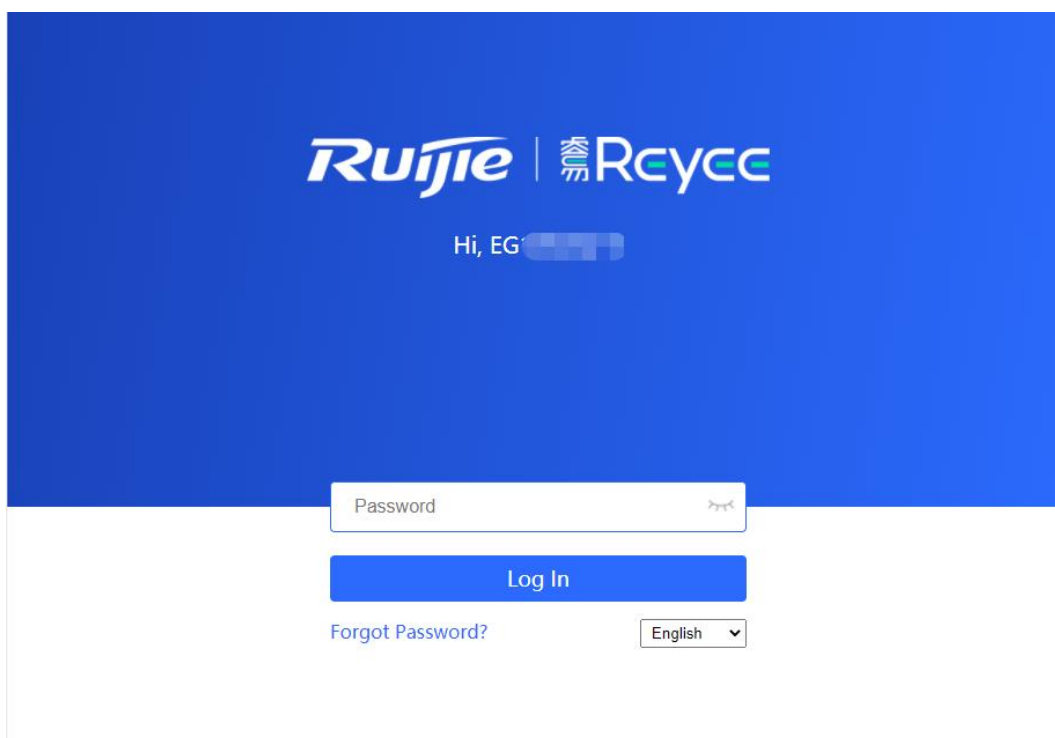

Username and password are not required at your first login and you can configure the router directly.

For device security, you are advised to set the management password after your first login to the web management system. After the password is set, you need to enter the password when you log in to the web management system again.

If you forget the IP address or password, hold down the **Reset** button on the device panel for more than 5 seconds when the device is connected to the power supply to restore factory settings. After restoration, you can use the default IP address and password to log in.

Caution

Restoring factory settings will delete the existing configuration and you are required to configure the device again at your next login. Therefore, exercise caution when performing this operation.

1.4 Work Mode

The device can work in router mode and AC mode. The system menu pages and configuration function scope vary depending on the work mode. By default, the EG router works in router mode. To modify the work mode, see [Section 3.1 Switching the Work Mode](#).

1.4.1 Router Mode

The device supports routing functions such as route-based forwarding and network address translation (NAT), VPN, and behavior management. It can allocate addresses to downlink devices, forward network data based on routes, and perform NAT operations.

In the router mode, the device can access the network through Point-to-Point Protocol over Ethernet (PPPoE) dialing, dynamic IP address, and static IP address. It can also directly connect to a fiber-to-the-home (FTTH) network cable or an uplink device to provide network access and manage downlink devices.

1.4.2 AC Mode

The device supports Layer 2 forwarding only. The device does not provide the routing and Dynamic Host Configuration Protocol (DHCP) server functions. By default, the WAN port obtains IP addresses through DHCP. The AC mode is applicable to the scenario where the network is working normally. In AC mode, the device serves as the management controller to access the network in bypass mode and manage the AP.

1.5 Configuration Wizard (Router Mode)

1.5.1 Getting Started

- (1) Power on the device. Connect the WAN port of the device to an uplink device using an Ethernet cable, or connect the device to the optical modem directly.
- (2) Configure the Internet connection type according to requirements of the local Internet Service Provider (ISP). Otherwise, the Internet access may fail due to improper configuration. You are advised to contact your local ISP to confirm the Internet connection type:
 - o Figure out whether the Internet connection type is PPPoE, DHCP mode, or static IP address mode.
 - o In the PPPoE mode, a username, a password, and possibly a service name are needed.
 - o In the static IP address mode, an IP address, a subnet mask, a gateway, and a DNS server need to be configured.

1.5.2 Configuration Steps

1. Adding a Device to Network

You can manage and configure all devices in the network in batches by default. Please verify the device count and network status before configuration.

 **Note**

New devices will join in a network automatically after being powered on. You only need to verify the device count.

If a new device is detected not in the network, click **Add to My Network** and enter its management password to add the device manually.

Note

If there is a firewall device in the network, the **Firewall Port Config** page appears. Select the corresponding port for configuration.

Total Devices: 1.
Please make sure that the device count and topology are correct. The unmanaged switch will not appear in the list. [View Topology](#)

Net Status (**Online Devices** / Total) Refresh

My Network

test (1 devices)

Model	SN	IP	MAC	Software Ver
Router EG105GW-E [Master]	MACCEGWELY01	192.168.12.1	00:D0:F8:15:79:45	ReyeeOS 1.86.1611

2. Creating a Network Project

Click **Start Setup** to configure the Internet connection type and management password.

- (1) **Network Name:** Identify the network where the device is located.
- (2) **Internet:** Configure the Internet connection type according to the requirements of the local ISP.
 - **DHCP:** The router detects whether it can obtain an IP address via DHCP by default. If the router connects to the Internet successfully, you can click **Next** without entering an account.
 - **PPPoE:** Click **PPPoE**, and enter the username, password, and service name. Click **Next**.
 - **Static IP:** Enter the IP address, subnet mask, gateway, and DNS server, and click **Next**.
- (3) **Management Password:** The password is used for logging in to the management page.
- (4) **Country/Region:** You are advised to select the actual country or region.
- (5) **Time Zone:** Set the system time. The network time server is enabled by default to provide the time service. You are advised to select the actual time zone.

The screenshot shows the 'Create Network' configuration page. At the top, there is a blue header with the Ruijie logo, 'Ruijie Cloud', and 'Create Network'. On the right side of the header, there is a language dropdown set to 'English' and an 'Exit' button. The main content area is light gray and contains several white form boxes. The first box is for the 'Network Name' with a placeholder 'Example: XX hotel.'. Below it is the 'Network Settings' section, which includes radio buttons for 'Internet', 'PPPoE', 'DHCP' (selected), and 'Static IP'. Under 'DHCP', there is a 'Checking IP assignment' icon and a text input field for '* SSID'. Below that are radio buttons for 'Wi-Fi Password', 'Security', and 'Open' (selected). The next section is 'Management Password (Please remember the password.)' with a text input field containing 'Please remember the management pas:' and a 'Show/Hide' icon. Below this is the 'Country/Region/Time Zone' section, which has a dropdown for '* Country/Region' set to 'China (CN)' and another dropdown for '* Time Zone' set to '(GMT+8:00)Asia/Shanghai'. At the bottom of the form, there are two buttons: 'Previous' and 'Create Network & Connect'.

Click **Create Network & Connect**. The device will deliver the initialization and check the network connectivity. The device can access the Internet now. Bind the device with a Ruijie Cloud account for remote management. Follow the instruction to log in to Ruijie Cloud for further configuration.

Note

- If your device is not connected to the Internet, click Exit to exit the configuration wizard.
 - Please log in again with the new password if you change the management password.
-

1.5.3 Forgetting the PPPoE Account

- (1) Consult your local ISP.
- (2) If you replace the old router with a new one, click **Obtain Account from Old Device**. Connect the old and new routers to a power supply and start them. Insert one end of an Ethernet cable into the WAN port of the old router and connect the other end to a LAN port of the new router, and click **Obtain**. The new router automatically fetches the PPPoE account of the old router. Click **Save** to make the configuration take effect.

Obtain PPPoE Account from Old Router ×

Internet PPPoE DHCP Static IP

⚡ Checking IP assignment

* Username


* Password

Service Name

🔑 Forgot Account? [Obtain Account from Old Device](#)

* SSID

Wi-Fi Password Security Open



Steps:

1. Transmit Power on the old router and new router.
2. Connect one end of a cable to the WAN port of the old router and connect the other end to the LAN port of the new router.
3. Click "Obtain".

1.6 Configuration Wizard (AC Mode)

1.6.1 Getting Started

- Power on the device and connect the device to an uplink device.
- Make sure that the device can access the Internet.

1.6.2 Configuration Steps

- (1) On the work mode setting page, change the work mode from router mode to AC mode. For details, see Section [3.1 Switching the Work Mode](#).

Description:

1. The device IP address may change upon mode change.
2. Change the endpoint IP address and ping the device.
3. Enter the new IP address into the address bar of the browser to access EWEB.
4. The system menu varies with different work modes.


Work Mode

Self-Organizing

Network

- (2) After mode switching, the device will restart. After restart, the WAN port on the device obtains an IP address through DHCP and accesses the network by using a dynamic IP address. The default Internet connection

type is DHCP mode. You can use the default value or manually configure a static IP address for the WAN port. For details, see Section [1.5.2 Configuration Steps](#).

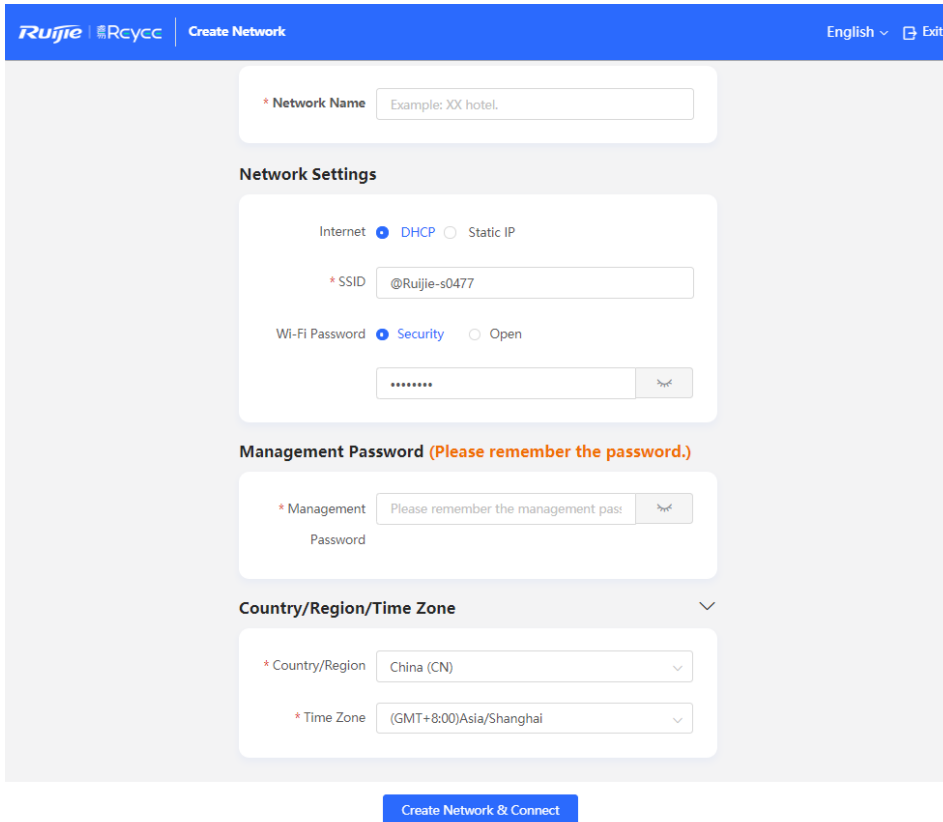


1.7 Switching Between Management Pages

After you disable self-organizing network discovery, the web page is in the Local Device mode. (Self-organizing network discovery is enabled upon delivery. For details, see Section [3.1 Switching the Work Mode](#))

After you enable self-organizing network discovery, you can switch between the Network and Local Device web pages. Click the current management mode in the navigation bar and select the desired mode from the drop-down list box.

Network mode: View the management information of all devices in the network and configure all devices in the current network from the network-wide perspective.

Local Device mode: Configure the device that you log in to.

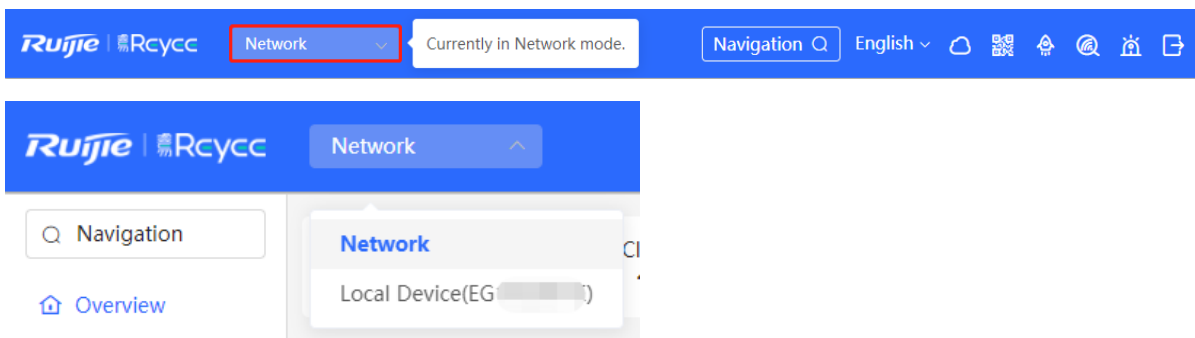

Network page:

The screenshot shows the Ruijie Rcycc Network page. The top navigation bar includes the Ruijie logo, Rcycc, a 'Network' dropdown, a search bar, and language settings. A left sidebar contains navigation options: Overview, Network, Devices, Gateway, Clients, and System. The main content area features a 'Status' section with 'Online' and '1' devices/clients. Below this is an 'Alert Center' with 'No Alerts Yet'. A 'Common Functions' section includes RLDP, DHCP Snooping, and Batch Config. A 'Network Planning' section shows 'test VLAN1' for both Wi-Fi and Wired VLANs. The central 'Topology' view displays a globe icon with traffic statistics (↑1.91K, ↓13.47K) connected to a 'WAN' port and a 'DHCP Server'. The device is identified as 'EG105GW-E' with SN:MACCEGWELY01. A 'Refresh' button is on the right, and a 'Collapse' button is at the bottom left. The page is updated on 2022-03-05 00:30:32.


Local Device page:

The screenshot shows the Ruijie Rcycc Local Device page for device 'EG1'. The top navigation bar includes the Ruijie logo, Rcycc, a 'Local Device(EG1)' dropdown, and language settings. A left sidebar contains navigation options: Overview, Basics, Security, Behavior, VPN, Advanced, Diagnostics, and System. The main content area is divided into sections: 'Overview' with 'Memory Usage 46%', 'Online Clients 1', and 'Status: Online' (Uptime: 50 minutes 57 seconds, System: 2022-04-24 14:48:03); 'Device Details' with fields for Model (EG1), MAC (00:D0:F8:15:79:45), Hardware Ver (1.00), Hostname (Ruijie), Work Mode (Router), Software Ver (ReyeeOS 1.86.1611), SN (MACCEGWELY01), and Role (Master AC); 'Wi-Fi' with 'Primary Wi-Fi: test1' (Security: Yes) and 'Guest Wi-Fi' (Security: No); and 'Ethernet status' showing 'Connected' and 'Disconnected' ports. The Ethernet status section displays icons for LAN0, LAN1 (192.168.12.1), LAN2, LAN3, and WAN (172.26.1.58). A 'Collapse' button is at the bottom left.

2 Network-Wide Monitoring


Choose **Network > Overview**.

The **Overview** page displays the current network topology, uplink and downlink real-time traffic, network connection status, and number of users and provides short-cut entries for configuring the network and devices. On the current page, you can monitor, configure, and manage the network status of the entire network.

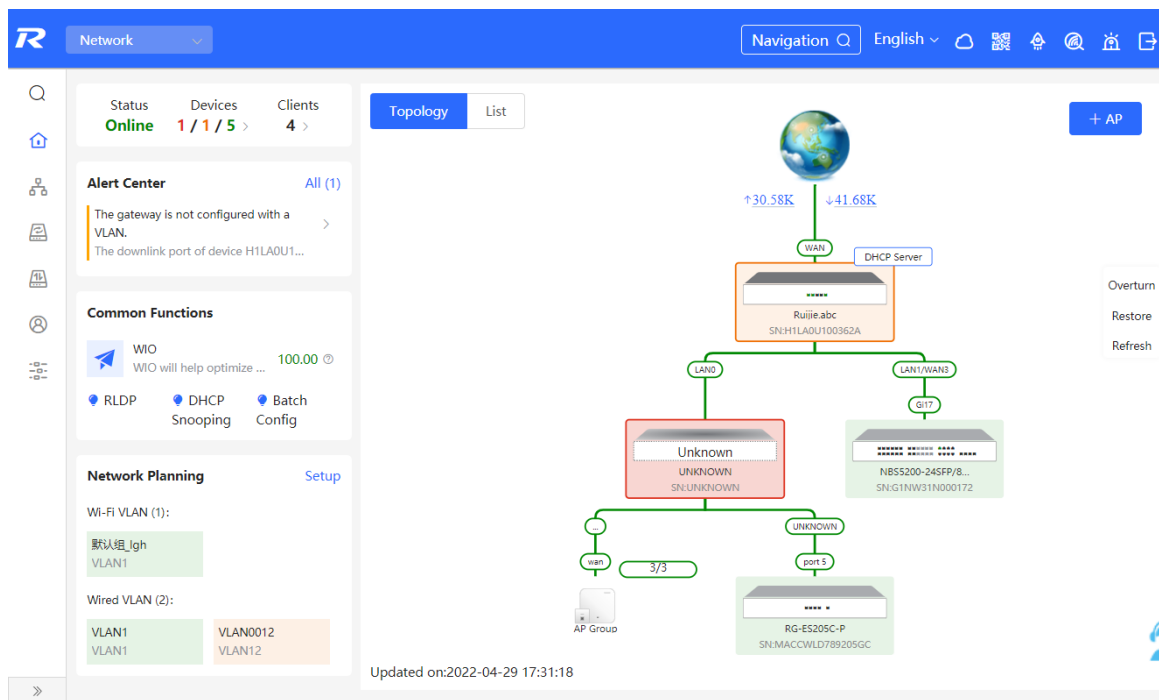



2.1 Viewing Networking Information


The networking topology contains information about online devices, connected port numbers, device SNs, and uplink and downlink real-time traffic.

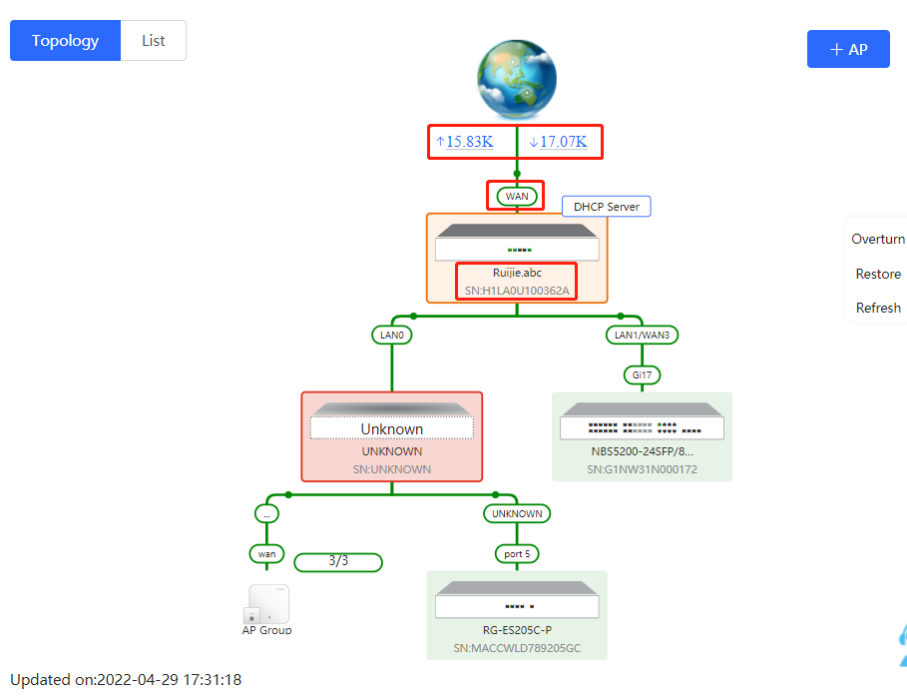


- Click a traffic data item to view the real-time total traffic information.

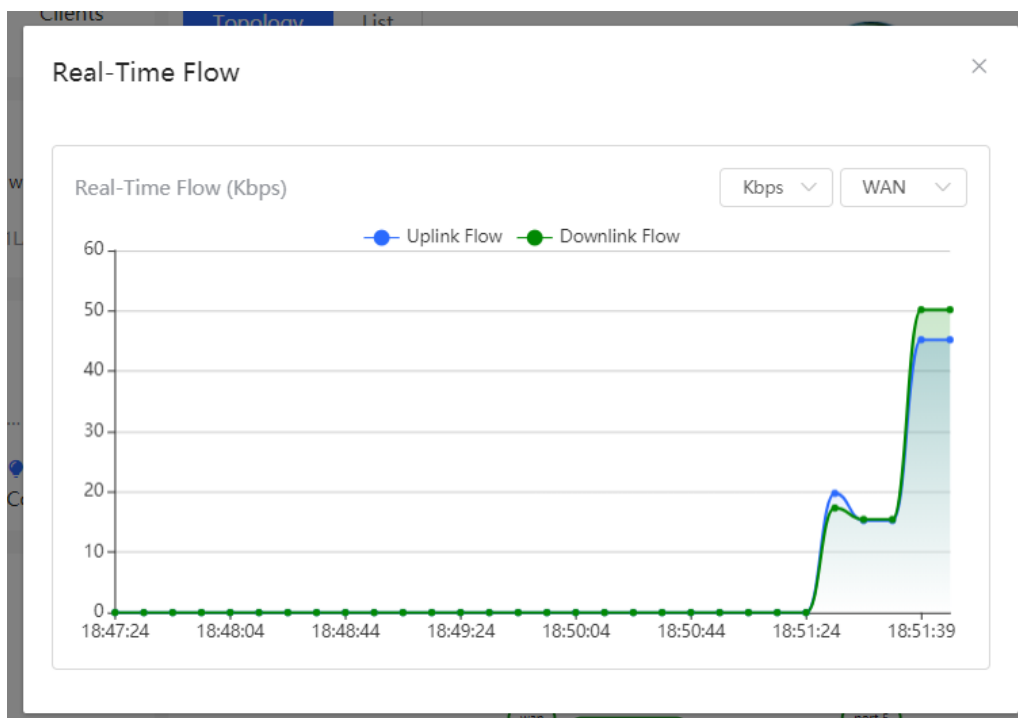


- Click a device in the topology to view the running status and configuration of the device and configure device functions. By default, the product model is used as the device name. Click  to modify the device name so that the description can distinguish devices from one another.

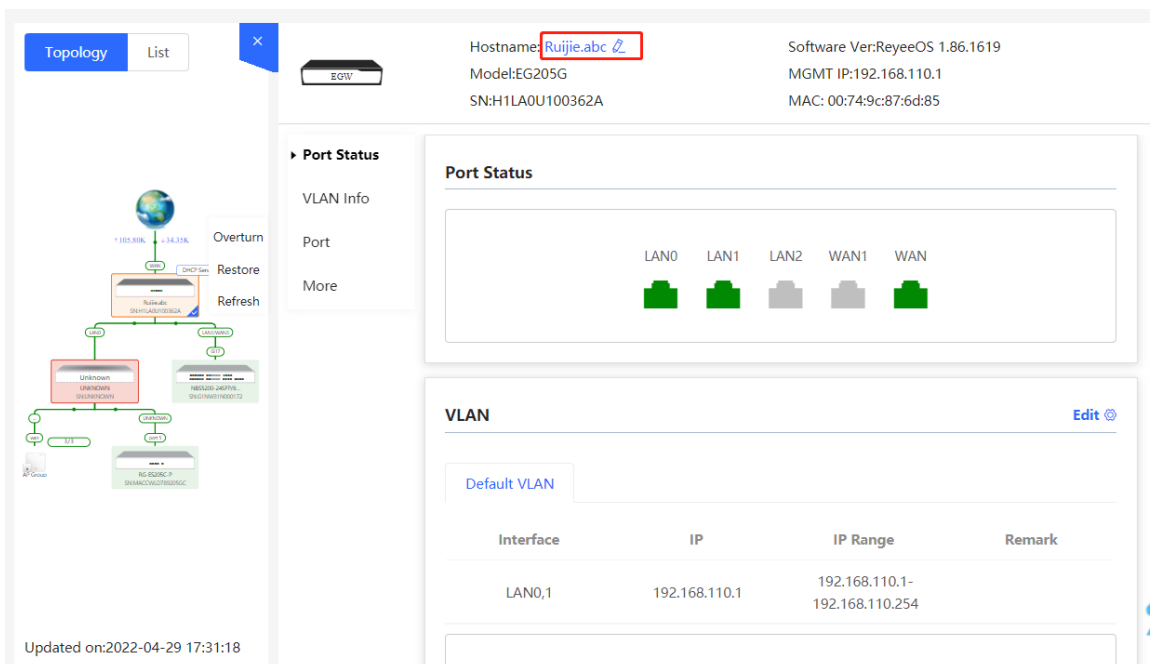

- Click **List** in the upper-left corner of the topology to switch to the device list view. Then, you can view device information in the current networking. Click an item in the list to configure and manage the device separately.

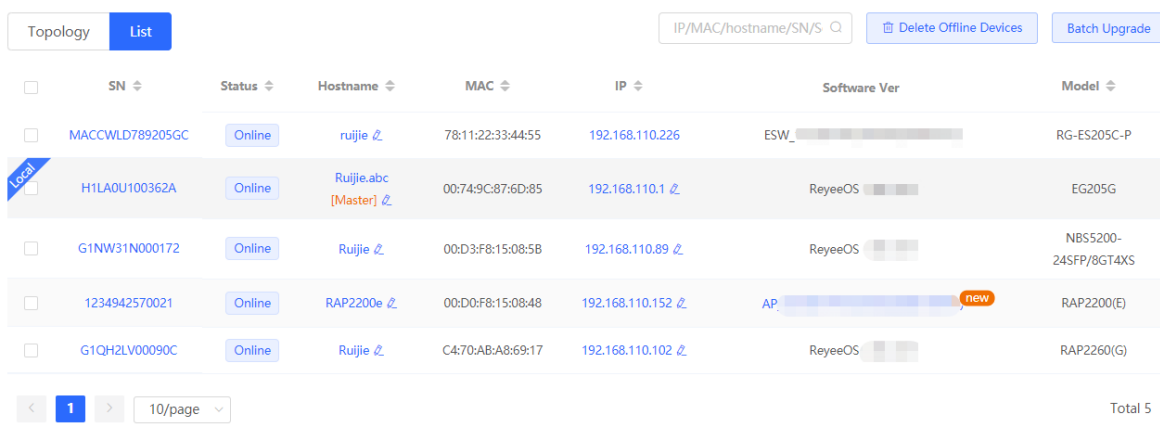


- The update time is displayed in the lower-left corner of the topology view. Click **Refresh** to update the topology to the latest state. It takes some time to update the topology data. Please wait patiently.

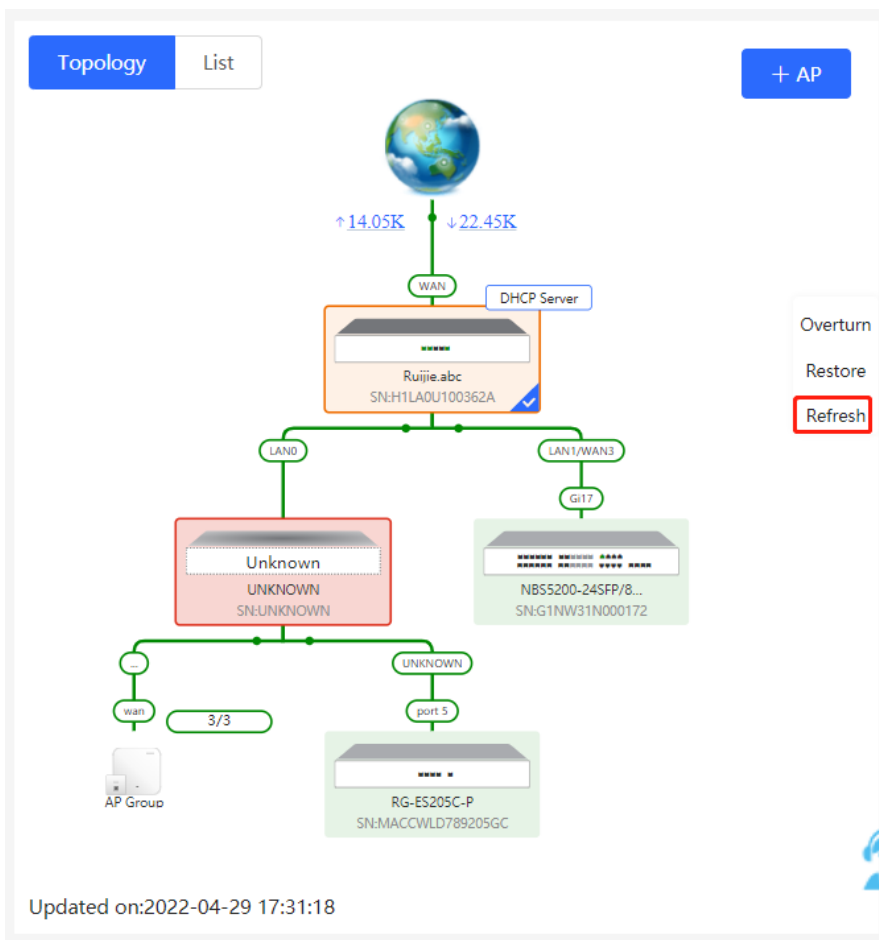


2.2 Adding Networking Devices


2.2.1 Wired Connection


- (1) When a new device connects to an existing device on the network, the system displays the message A devices not in SON is discovered. and the number of such devices in orange under **Devices**. You can click **Manage** to add this device to the current network.

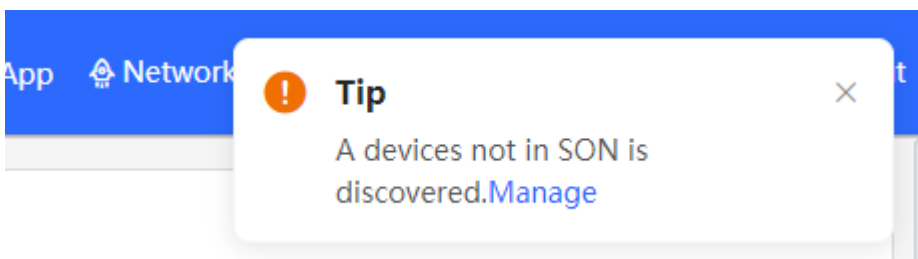

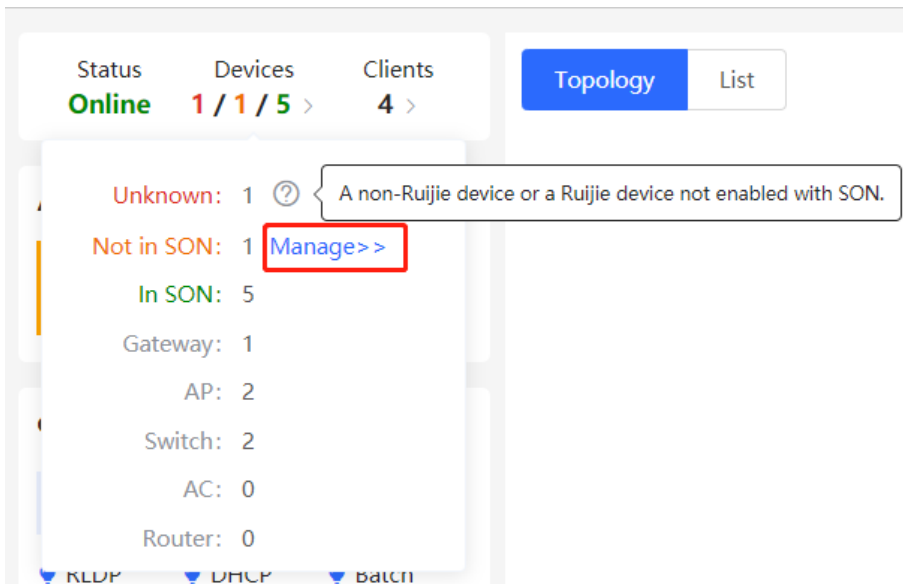


- (2) After the system switches to the **Network List** page, click **Other Network**. In the **Other Network** section, select the device to be added to the network and click **Add to My Network**.

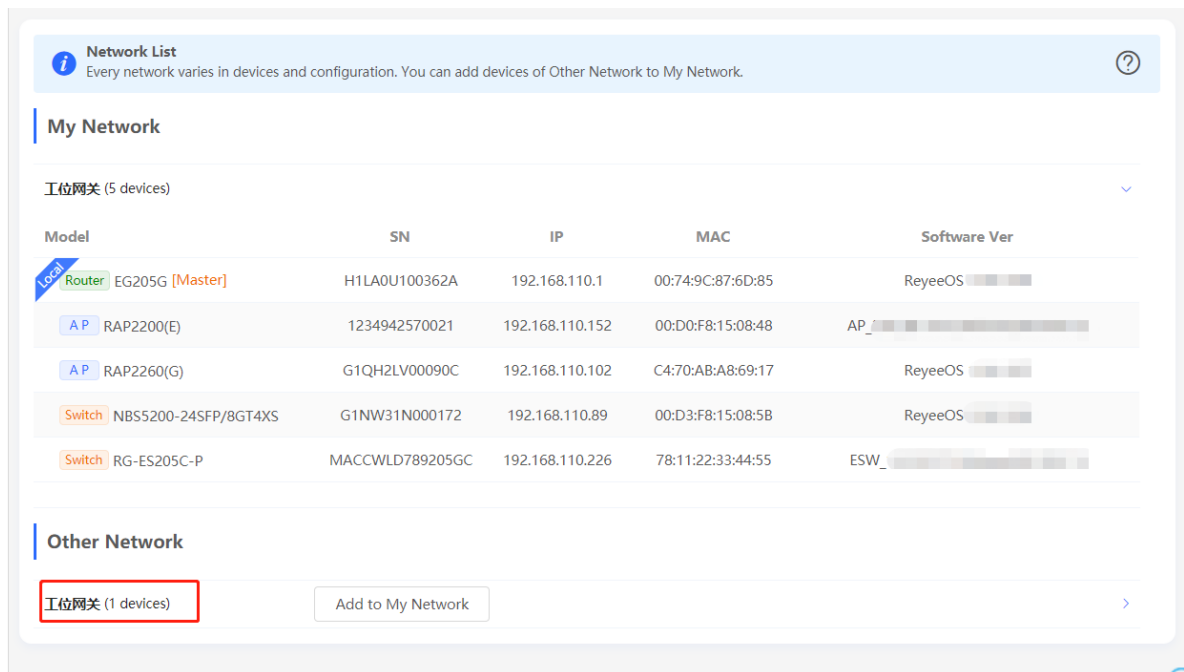

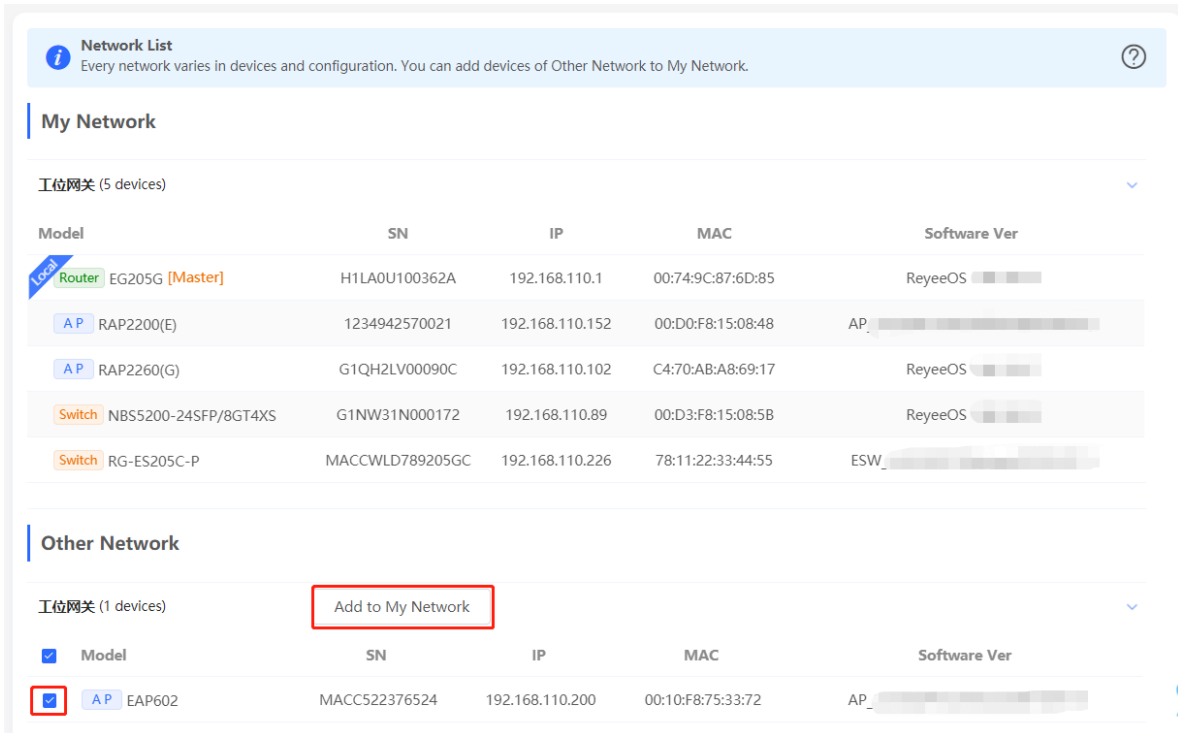

- (3) You do not need to enter the password if the device is newly delivered from factory. If the device has a password, enter the management password of the device. Device addition fails if the password is incorrect.

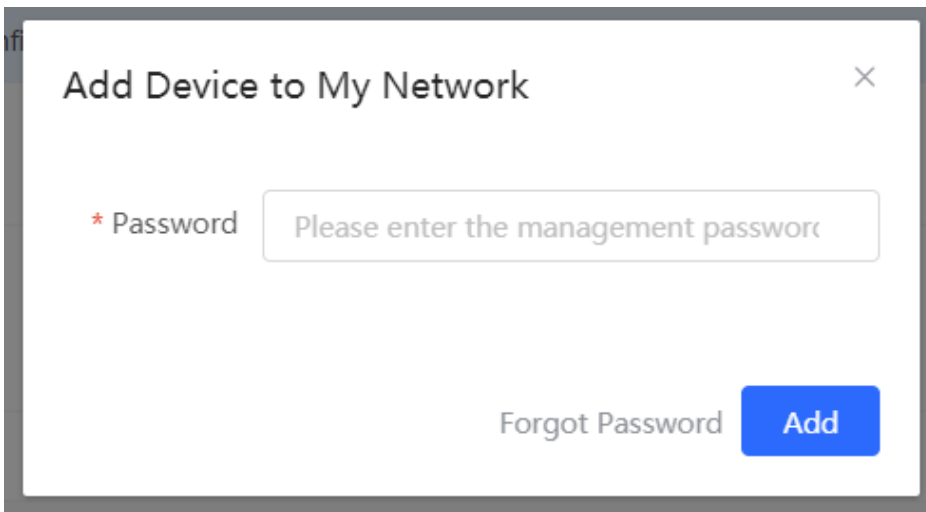


2.2.2 AP Mesh

If the AP supports the AP Mesh (Reyee Mesh) function, you do not need to connect cables after powering on the AP. The AP can be added to the current network in Reyee Mesh mode, establish a mesh networking with other wireless devices, and automatically synchronize Wi-Fi configuration.

⚠ Caution

To scan the AP, the Reyee Mesh function must be enabled on the current network. (For details, see Section [4.11 Enabling Reyee Mesh.](#)) The AP should be powered on nearby. It may fail to be scanned in case of long distance or obstacle blocking.


- (1) Place the powered new AP near an existing AP, where the new AP can receive Wi-Fi signals from the existing AP. Log in to a device in the network. On the **Overview** page, click **+AP** in the upper-right corner of the topology to scan nearby APs that do not belong to the current network and are not connected to a network cable.

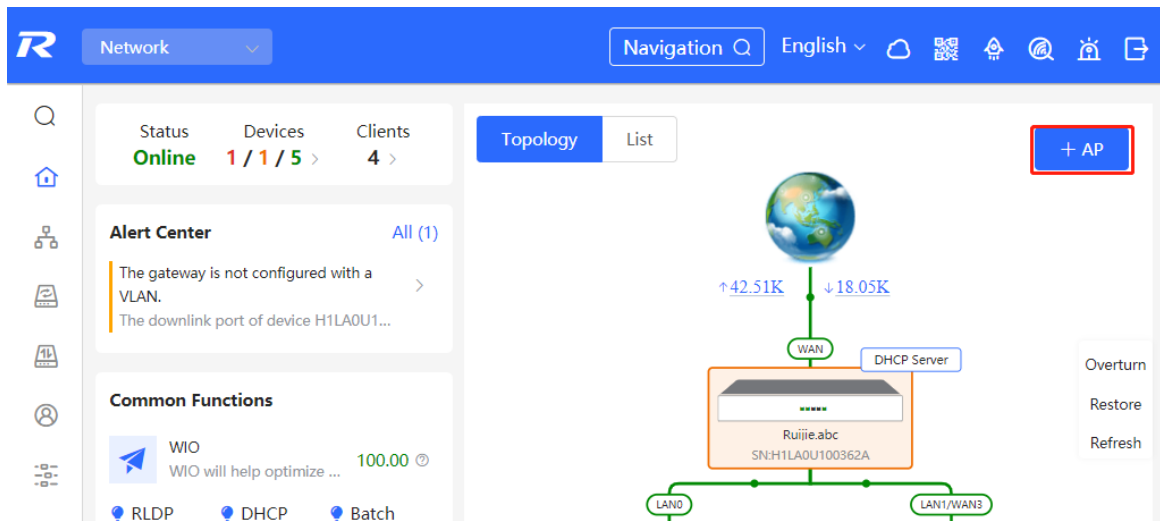

- (2) Select the target AP to add it to the current network. You do not need to enter the password if the device to add is new. If the device has a password, enter the management password of the device.


2.3 Configuring the Service Network

The wireless and wired network configurations of the current network are displayed in the lower-left of the **Overview** page. Click **Setup** to switch to the service network configuration page (**Network > Network Planning**).

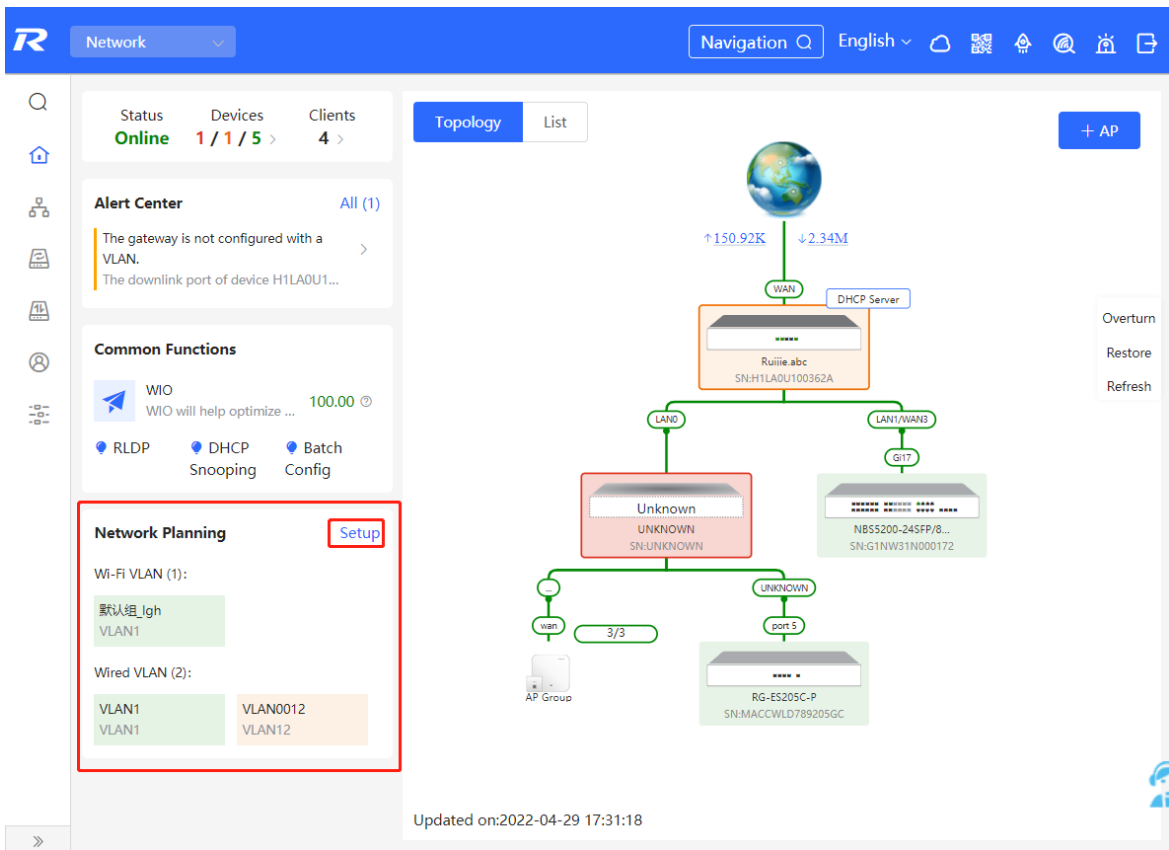


2.3.1 Configuring the Wired Network


- (1) Click **Add Wired VLAN** to add wired network configuration, or select an existing wired VLAN and click **Setup** to modify its configuration.

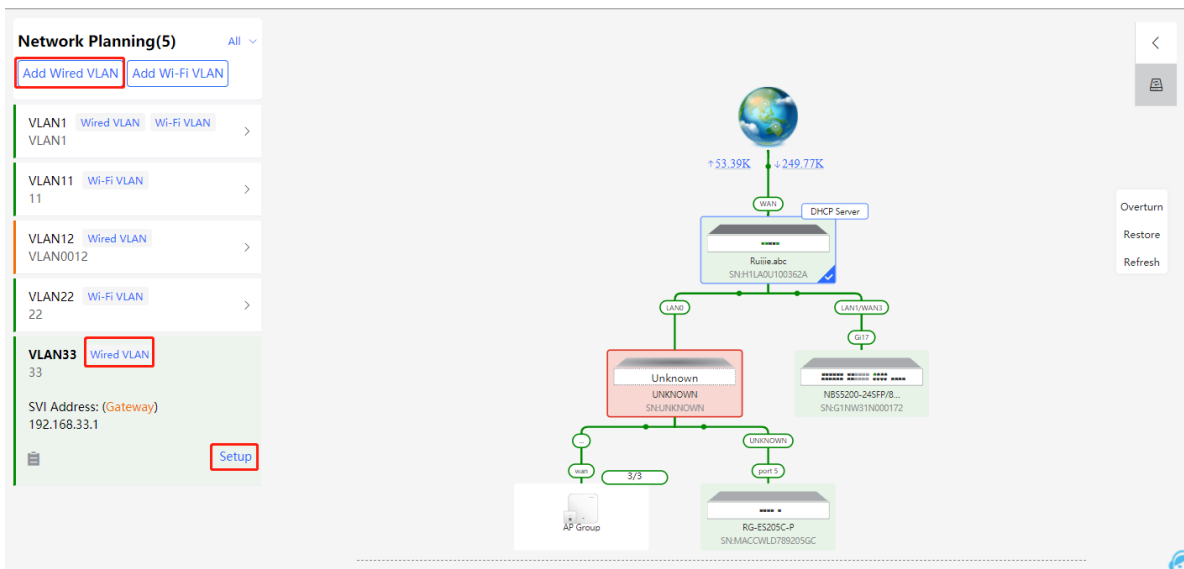


- (2) Configure a VLAN for wired access, specify the address pool server for access clients in this VLAN, and determine whether to create a new DHCP address pool. By default, the gateway is used as the address pool server to allocate addresses to access clients. If an access switch is available in this networking, you can select this switch as the address pool server. After setting the service parameters, click **Next**.

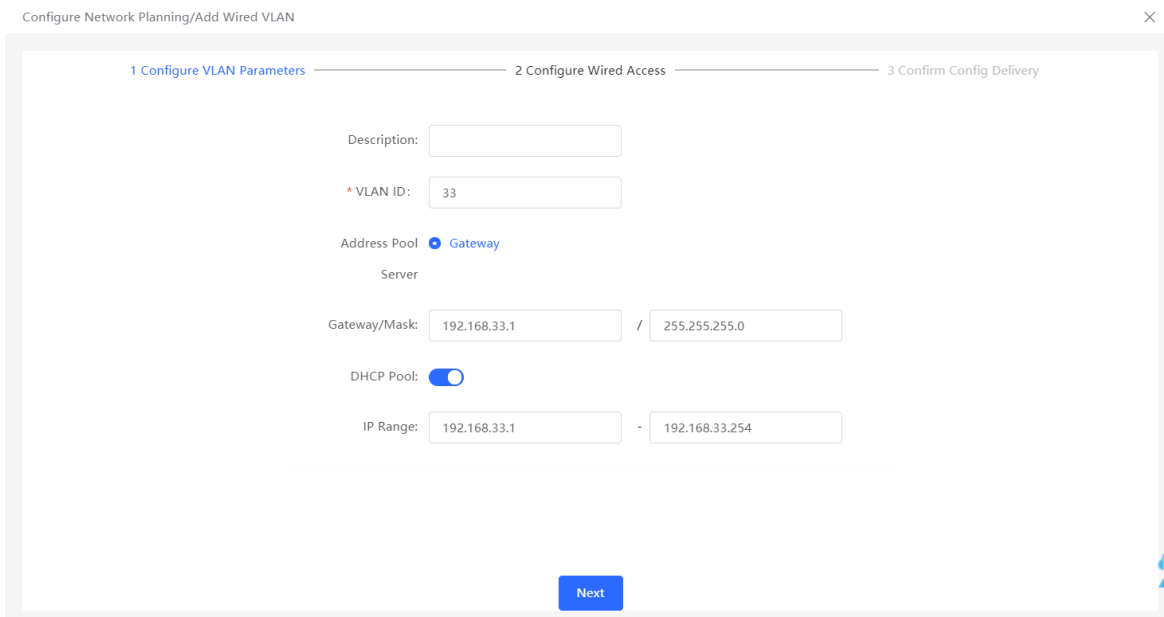

(3) Select the switch to configure in the topology, select the switch ports added to this VLAN, and click **Next**.

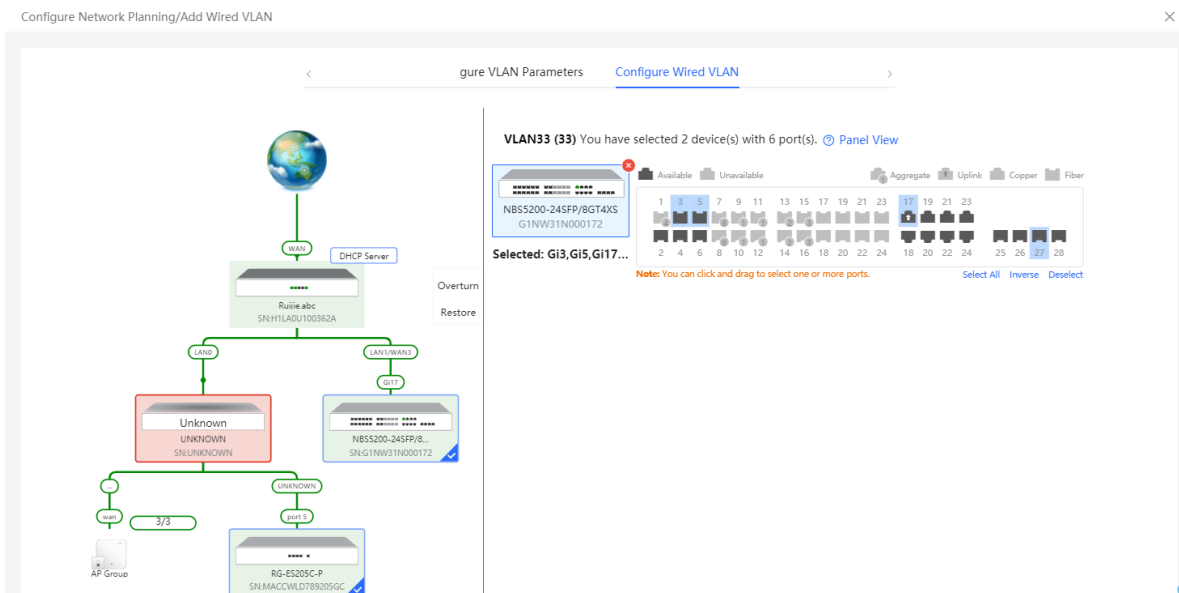


(4) Confirm that the configuration items to be delivered are correct and then click **Save**. Wait a moment for the configuration to take effect.

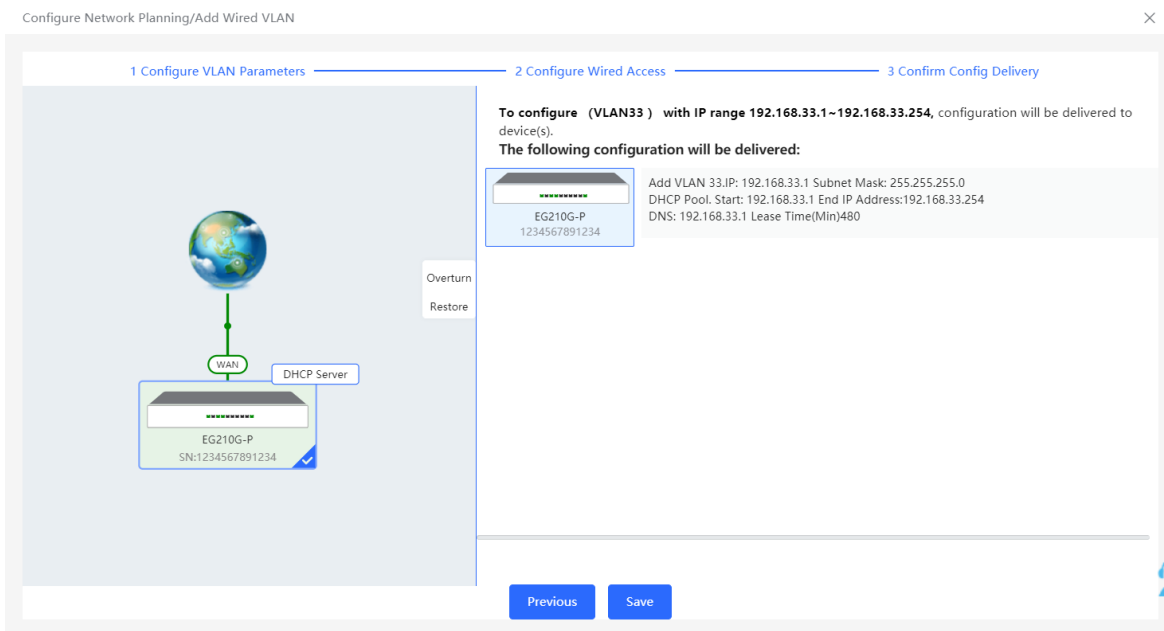

2.3.2 Configuring the Wireless Network

- (1) Click **Add Wi-Fi VLAN** to add wireless network configuration, or select an existing Wi-Fi VLAN and click **Setup** to modify its configuration.

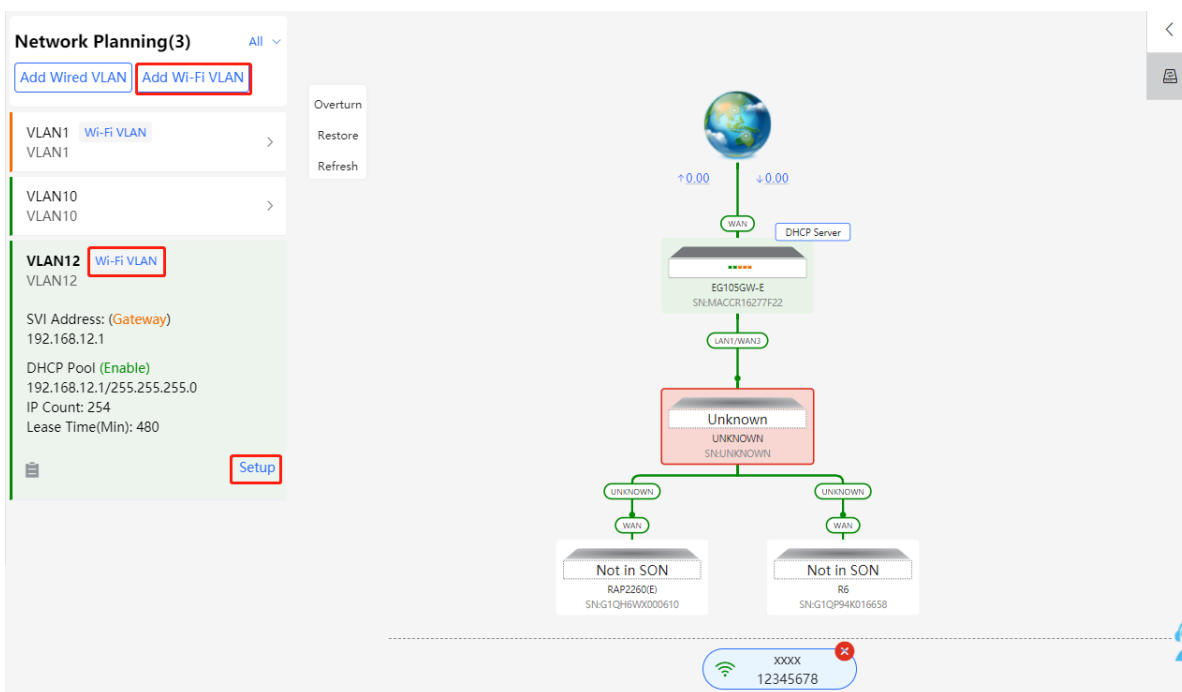

- (2) Set the SSID, Wi-Fi password, and applicable bands. Click **Next**.

Configure Network Planning/Add Wi-Fi VLAN

1 Configure Wireless Access — 2 Configure VLAN Parameters — 3 Confirm Config Delivery

* SSID:

Security: Security Open

* Wi-Fi Password:

Band: 2.4G + 5G 2.4G 5G

- (3) Configure a VLAN for wireless access, specify the address pool server for access clients in this VLAN, and determine whether to create a new DHCP address pool. By default, the gateway is used as the address pool server to allocate addresses to access clients. If an access switch is available in this networking, you can select this switch as the address pool server. After setting the service parameters, click **Next**.

Configure Network Planning/Add Wi-Fi VLAN

1 Configure Wireless Access — 2 Configure VLAN Parameters — 3 Confirm Config Delivery

Description:

* VLAN ID:


topo.addressPool Gateway

Gateway/Mask: /

DHCP Pool:

IP Range: -

- (4) Confirm that the configuration items to be delivered are correct and then click **Save**. Wait a moment for the configuration to take effect.

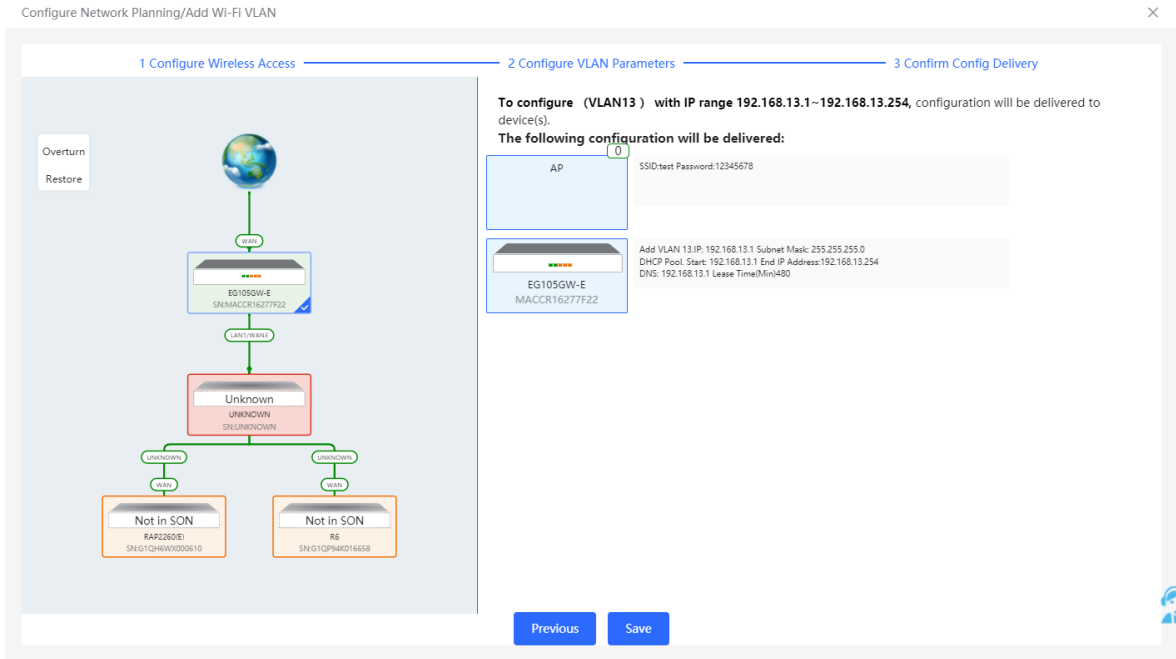

2.4 Supporting Traffic Monitoring

Traffic monitoring can be carried out based on ports, users, and applications. The real-time or historical uplink traffic, downlink traffic, and number of sessions can be displayed.


2.4.1 Viewing Real-time Traffic

[Local Device] Choose **Overview > Real Time Flow**.

- (1) View real-time traffic of a port.
 - a Click the **Port Real-Time Flow** tab.
 - b Set **Choose Outbound Interface**.
Set **Choose Outbound Interface** to a port or **ALL-WAN**. You can view the uplink or downlink traffic of a port or the system.




- c View traffic in the last one hour.
Choose a port or **ALL-WAN** from the **Choose Outbound Interface** drop-down list and view the traffic and sessions (including sessions of an original WAN port after LAN/WAN switching) in the last one hour.

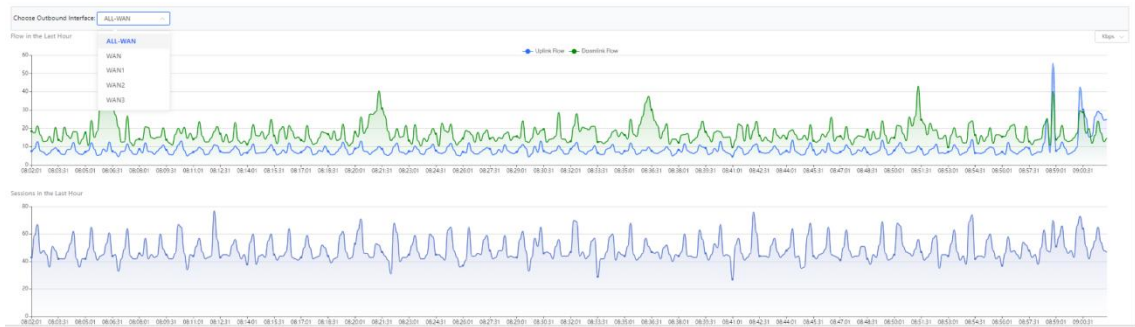

Note

Uplink traffic and downlink traffic are color-coded in the figure. You can move the cursor over a curve to view uplink traffic and downlink traffic at a certain time.

- (2) View real-time traffic of a user.
 - a Click the **User Real-Time Flow** tab.

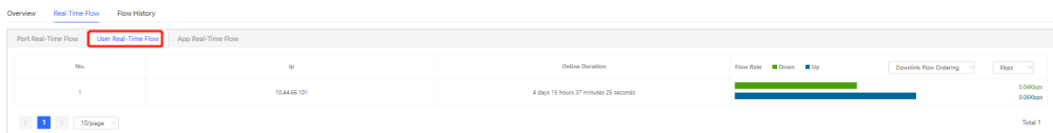

- b The system displays real-time traffic of users.
You can view the IP address, online duration, uplink traffic, and downlink traffic of each user.


If there are multiple users, the system displays traffic data by downlink traffic in descending order by default. The sorting mode can be switched based on uplink traffic or downlink traffic. You can set the traffic unit, number of items to be displayed on the current page, paging display, and other functions based on service requirements.

- c View traffic details of a user.


Note

Only EG3XX series devices (such as EG310G-E) support this function and **Flow-audit Switch** on the **App Real-Time Flow** tab page needs to be turned on.

Click **Detailed**. The pop-up page displays the uplink traffic and downlink traffic of each app used by the current user. You can set the sorting mode (by downlink traffic or uplink traffic), unit, and other parameters based on service requirements.

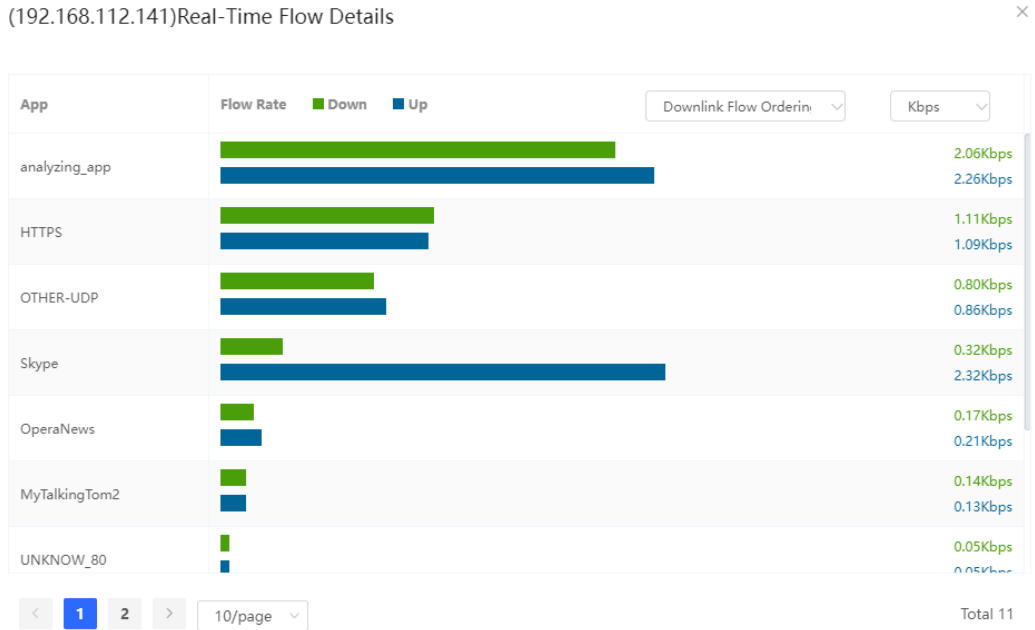


- (3) View real-time traffic of an app.
 - a Click the **App Real-Time Flow** tab.
 - b Turn on **Flow-audit Switch**.



- c The system displays real-time traffic of apps.
You can view the name, application group, uplink traffic, and downlink traffic of each app.

If there are multiple apps, the system displays traffic data by downlink traffic in descending order by default. The sorting mode can be switched based on uplink traffic or downlink traffic. You can set the traffic unit, number of items to be displayed on the current page, paging display, and other functions based on service requirements.

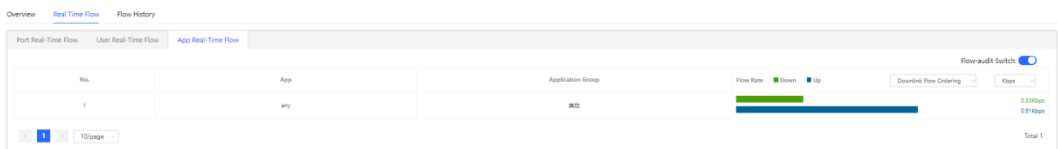


- d View traffic details of an app.

Note

Only EG3XX series devices (such as EG310G-E) support this function.

Click **Detailed**. The pop-up page displays details about the traffic of each user who uses the current app. You can set the sorting mode (by downlink traffic or uplink traffic), unit, and other parameters based on service requirements.

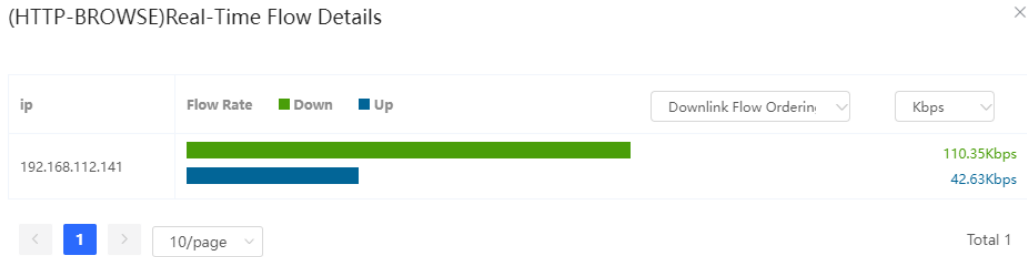

2.4.2 Viewing Historical Traffic


[Local Device] Choose **Overview > Flow History**.

(4) View historical traffic of a port.

- a Click the **Port Flow History** tab.
- b Set **Choose Outbound Interface** and **Time Span**.

Set **Choose Outbound Interface** to a port or **ALL-WAN**. You can view the uplink or downlink traffic of a port or the system.

The system allows you to view historical data of 24 hours or 48 hours. Set **Time Span** and **Choose Outbound Interface**. The system displays historical data of a port or all ports in the current time span.

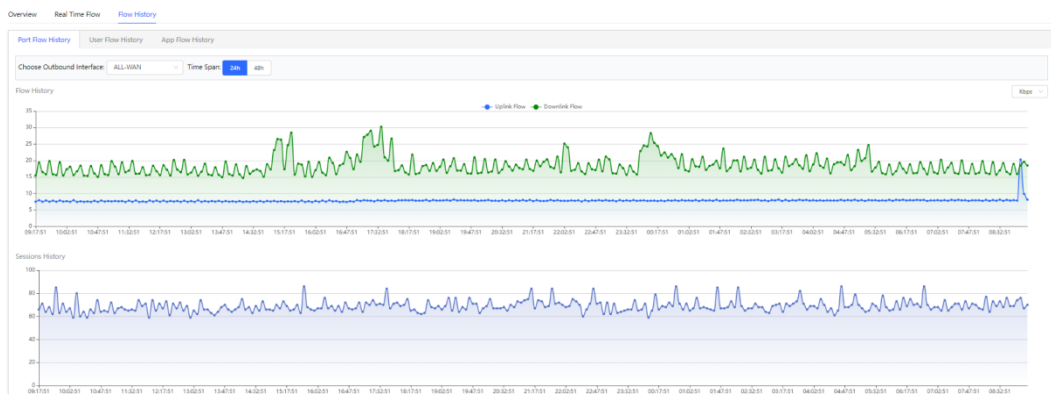

Note


Uplink traffic and downlink traffic are color-coded in the figure. You can move the cursor over a curve to view uplink traffic and downlink traffic at a certain time.

(5) View historical traffic of a user.

- a Click the **User Flow History** tab.
- b Set **Time Span**.

On the **User Flow History** tab page, you can view today's or this week's historical traffic data of a user.

For example, you can click **This Week** to switch to this week's data statistics display page, as shown in the figure below.

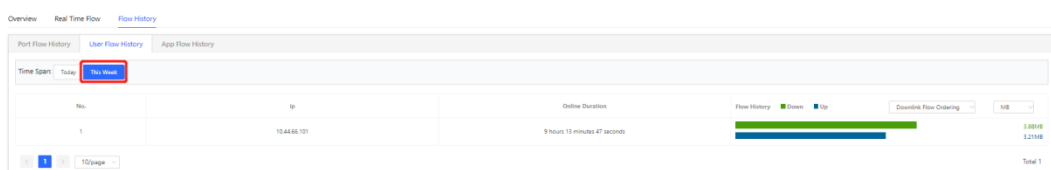


If there are multiple users, the system displays traffic data by downlink traffic in descending order by default. You can view the online duration, uplink traffic, and downlink traffic of each user in the time span. The sorting mode can be switched based on uplink traffic or downlink traffic. You can set the traffic unit, number of items to be displayed on the current page, paging display, and other functions based on service requirements.

- c View traffic details of apps used by a user.

Note

Only EG3XX series devices (such as EG310G-E) support this function and **Flow-audit Switch** on the **App Flow History** tab page needs to be turned on.

Click **Detailed**. The pop-up page displays the traffic and online duration of each app used by the current user. You can set the sorting mode (by downlink traffic or uplink traffic), unit, and other parameters based on service requirements.

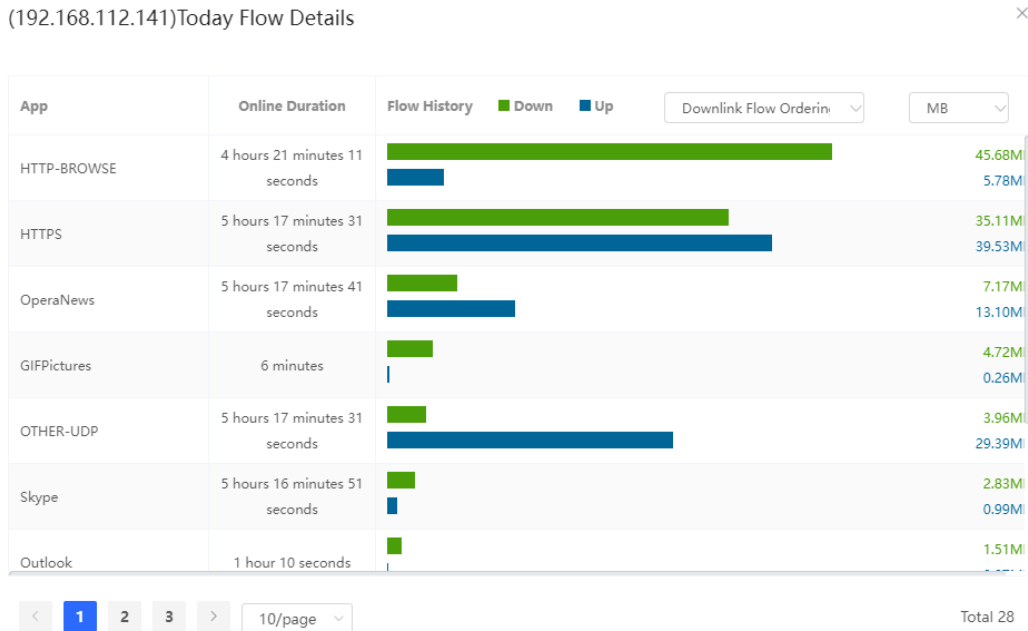

- (6) View historical traffic of an app.
 - a Click the **App Flow History** tab.
 - b Turn on **Flow-audit Switch**.


Note

The status of **Flow-audit Switch** is consistent with that of **Flow-audit Switch** on the **App Real-Time Flow** page. After it is turned on, the app real-time flow function and app flow history function are enabled.


- c Set the time span.

On the **App Flow History** tab page, you can view today's or this week's historical user data.

For example, you can click **This Week** to switch to this week's data statistics display page, as shown in the figure below.

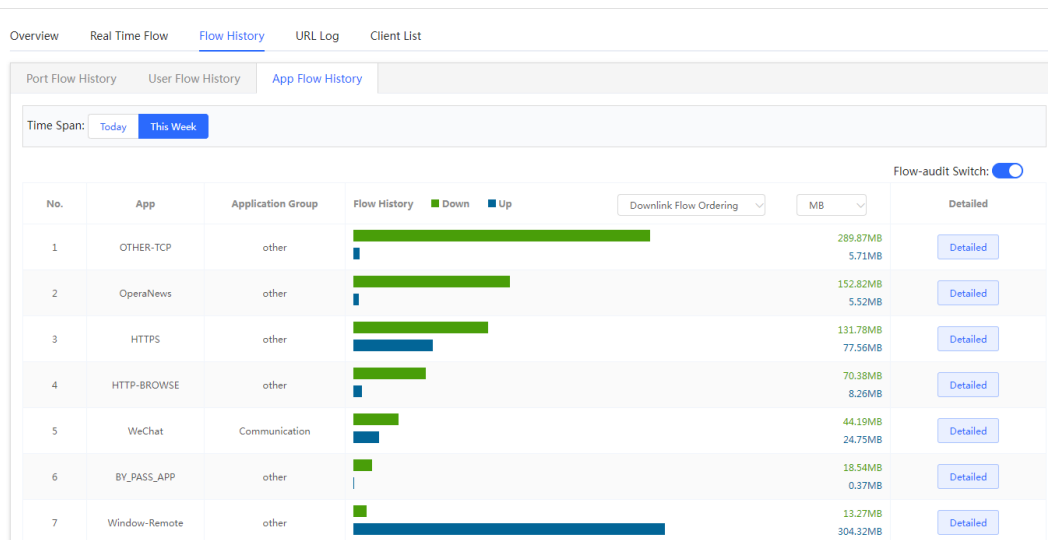

If there are multiple apps, the system displays traffic data by downlink traffic in descending order by default. You can view the name, application group, uplink traffic, and downlink traffic of each app in the time span. The sorting mode can be switched based on uplink traffic or downlink traffic. You can set the traffic unit, number of items to be displayed on the current page, paging display, and other functions based on service requirements.

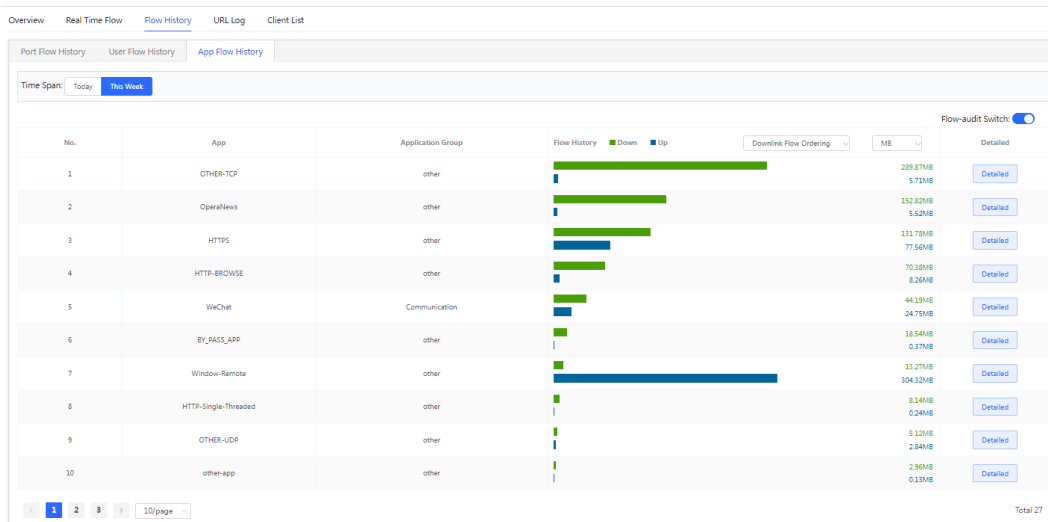

- d View traffic details of an app.

Note

Only EG3XX series devices (such as EG310G-E) support this function.

Click **Detailed**. The pop-up page displays details about the traffic of each user who uses the current app. You can set the sorting mode (by downlink traffic or uplink traffic), unit, and other parameters based on service requirements.

(MICROSOFT-DS)Today Flow Details ✕

ip	Online Duration	Flow History ■ Down ■ Up	Downlink Flow Orderin	MB
192.168.111.9	10 hours 58 minutes 37 seconds	<div style="width:100%; height:10px; background-color:green;"></div> <div style="width:40%; height:10px; background-color:blue;"></div>		17.11MB 9.21MB
192.168.111.23	10 hours 58 minutes 37 seconds	<div style="width:60%; height:10px; background-color:green;"></div> <div style="width:10%; height:10px; background-color:blue;"></div>		6.74MB 2.47MB
192.168.111.11	1 hour 4 minutes 48 seconds	<div style="width:5%; height:10px; background-color:green;"></div> <div style="width:5%; height:10px; background-color:blue;"></div>		0.80MB 0.64MB
192.168.111.26	59 minutes 22 seconds	<div style="width:1%; height:10px; background-color:green;"></div> <div style="width:1%; height:10px; background-color:blue;"></div>		0.01MB 0.01MB

< 1 > 10/page Total 4


2.5 Supporting the URL Logging Function

URL logs record and display website domain names accessed by devices connected to LAN ports within a certain minute, access count, and audit results.

Note
Only EG3XX series devices (such as EG310G-E) support this function.

[Local Device] Choose **Overview > URL Log**.

- Enable the URL logging function.
Click **Enable** and then click **OK**.

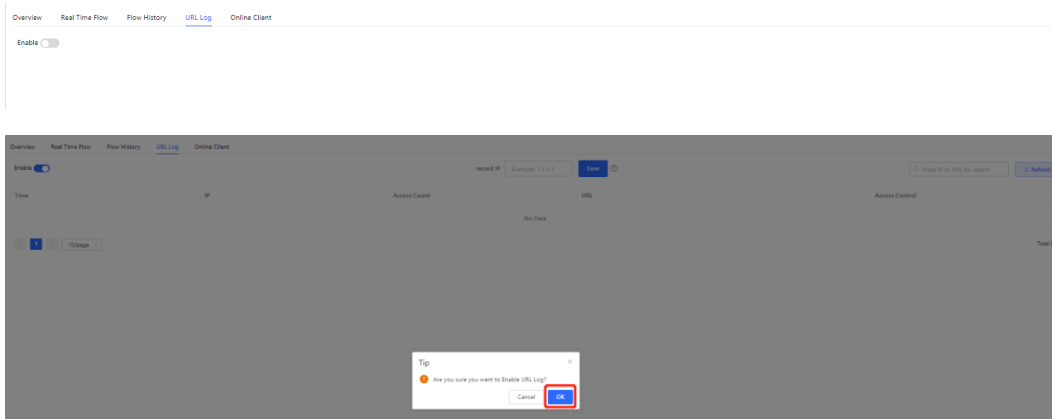

- (Optional) Configure **record IP**.
The system records access records of all devices connected to LAN ports by default. If you need to view access records of a single device, set **record IP**.

Enter the device IP address in **record IP** and click **Save**.

The screenshot shows the 'URL Log' interface with a table of access records. The 'record IP' field is highlighted with a red box. The table has columns for Time, IP, Access Count, URL, and Access Control.

Time	IP	Access Count	URL	Access Control
2022-08-15 09:26	192.168.33.3	1	http://cloudlog.glink.6222	Allow
2022-08-15 09:26	192.168.33.4	16	http://wi.diggo.cn	Allow
2022-08-15 09:26	192.168.33.3	1	http://www.baidu.com	Allow
2022-08-15 09:25	192.168.33.4	3	http://192.241.131.85	Allow
2022-08-15 09:25	192.168.33.4	1	http://112.60.8.27	Allow
2022-08-15 09:25	192.168.33.4	5	http://www.hartwellin.com	Allow
2022-08-15 09:25	192.168.33.4	16	http://wi.diggo.cn	Allow
2022-08-15 09:25	192.168.33.4	1	http://www.baidu.com	Allow
2022-08-15 09:25	192.168.33.4	1	http://www.baidu.com	Allow
2022-08-15 09:25	192.168.33.4	1	http://192.254.118.119	Allow
2022-08-15 09:25	192.168.33.4	1	http://www.baidu.com	Allow

Note

If you need to restore access records of all devices connected to LAN ports, clear information in **record IP** and click **Save**.

(3) Check access records.

The system displays detailed access records, including the time, IP address, and access count.

You can search for access records by IP address or URL.

The first screenshot shows the 'record IP' field with '192.168.33.3' entered and a search button. The table below shows 4 records.

Time	IP	Access Count	URL	Access Control
2022-08-15 09:26	192.168.33.3	1	http://cloudlog.glink.6222	Allow
2022-08-15 09:26	192.168.33.3	1	http://www.baidu.com	Allow
2022-08-15 09:25	192.168.33.3	1	http://www.baidu.com	Allow
2022-08-15 09:24	192.168.33.3	1	http://192.204.63	Allow

The second screenshot shows the 'record IP' field with 'baidu' entered in the search field. The table below shows 2 records.

Time	IP	Access Count	URL	Access Control
2022-08-15 09:26	192.168.33.3	1	http://www.baidu.com	Allow
2022-08-15 09:25	192.168.33.3	1	http://www.baidu.com	Allow

2.6 Processing Alerts

If a network exception occurs, alert message on this exception and the corresponding solution are displayed on the **Overview** page. Click the alert message in the **Alert Center** section to view the faulty device, problem details, and its solution. Troubleshoot and process the alert according to the solution.


The screenshot displays the network management interface. On the left, the 'Alert Center' is highlighted with a red box, showing a warning: 'The gateway is not configured with a VLAN. The downlink port of device H1LA0U1...'. The main area shows a network topology diagram with a central gateway (Ruijie.abc) connected to LAN0 and LAN1/WAN3. LAN0 is connected to an 'Unknown' device, and LAN1/WAN3 is connected to a switch (NB55200-245FP/8...). The gateway is also connected to a DHCP Server. The interface includes navigation menus, status indicators (Online, 1/1/5 devices, 4 clients), and various function buttons like 'Topology', 'List', and '+ AP'. The status is 'Updated on:2022-04-29 17:31:18'.

This screenshot shows the 'Alerts' section of the network management interface. A 'Current Alert' is displayed with the message: 'The downlink port LAN1/WAN3 of device H1LA0U100362A is not allowed to be configured with allowed VLAN 12.' The solution provided is: 'Please configure the LAN IP address.' The background shows a faded view of the network topology diagram, which includes a central gateway (Ruijie.abc) connected to LAN0 and LAN1/WAN3. LAN0 is connected to an 'Unknown' device, and LAN1/WAN3 is connected to a switch (NB55200-245FP/8...). The gateway is also connected to a DHCP Server. The interface includes navigation menus, status indicators, and various function buttons like 'Topology', 'List', and '+ AP'. The status is 'Updated on:2022-04-29 17:31:18'.

2.7 Configuring the Audit Log

After the audit log function is enabled and configured, the system will generate the DHCP lease time logs, URL logs of online users, and NAT logs.

[Local Device] Choose **Advanced > Audit Log**.

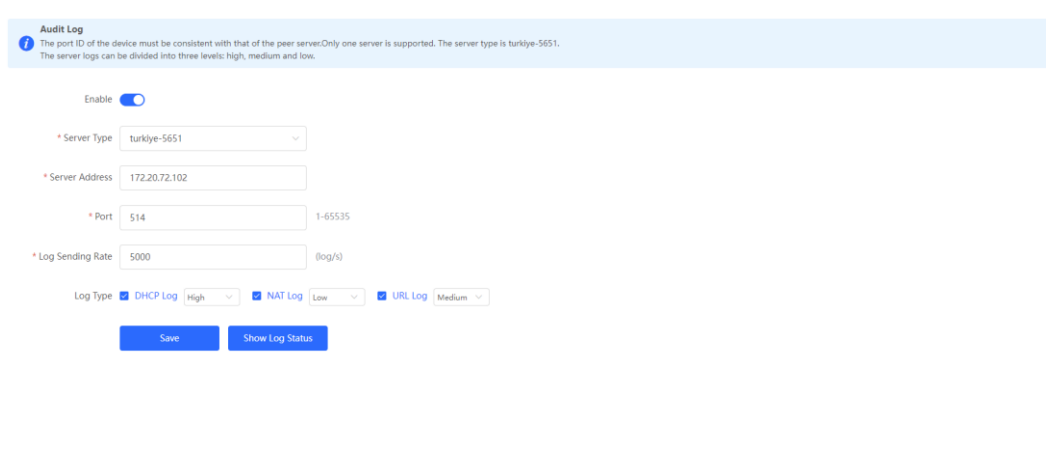

(1) Click **Enable** to enable the audit log function.

Note

The system will clear the logs if you enable the audit log function and then disable it.

(2) Configure the following parameters related to the audit log function.

Parameter	Description
Server Type	Specify the log output format. Currently DHCP logs, URL logs and NAT logs only support Türkiye-5651 mode.
Server Address	Indicate the log server address. Only IPv4 addresses are supported.
Port	Indicate the server port ID, which can be customized. The default port ID is 514.
Log Sending Rate	Indicate the log sending rate at which the device sends the audit logs to the server. The default rate is 5000 logs per second and the customized rate ranges from 1 to 10000 logs per second.
Log Type	Specify the log type sent to the server, including DHCP logs, NAT logs and URL logs. You can specify the sending priority for the logs: High, Medium, and Low. If the log type is in the high-priority list, its cache line will be prioritized and the logs will be sent to the server preferentially.

(3) Click **Save**.

Click **Show Log Status** to view the status of the audit log function, including the server IP address, server connection status, sending history of each log type (including the logs in the three statuses: Received, Sent, and Discarded).

The screenshot displays the 'Show Log Status' interface. It includes the following information:

- Server: 192.168.111.2:514
- Server Type: turkiye-5651
- Server Status: Connected
- Log Sending Rate: 5000 (log/s)
- Log Statistics Table:

Log Type	Received	Sent	Discarded
NAT Log	4889	4889	0
DHCP Log	12	12	0
URL Log	1739	1739	0
- Buttons: Refresh and Cancel

3 Network Settings

3.1 Switching the Work Mode

3.1.1 Work Mode

For details, see Section [1.4 Work Mode](#).

3.1.2 Self-Organizing Network Discovery

When setting the work mode, you can set whether to enable the self-organizing network discovery function. This function is enabled by default.

After the self-organizing network discovery function is enabled, the device can be discovered in the network and discover other devices in the network. Devices network with each other based on the device status and synchronize global configuration. You can log in to the Web management page of any device in the network to check information about all devices in the network. After this function is enabled, clients can maintain and manage the current network more efficiently. You are advised to keep this function enabled.

If the self-organizing network discovery function is disabled, the device will not be discovered in the network and it runs in standalone mode. After logging in to the Web page, you can configure and manage only the currently logged in device. If only one device is configured or global configuration does not need to be synchronized to the device, you can disable the self-organizing network discovery function.

Note

In AC mode, the self-organizing network discovery function is enabled by default.

After the self-organizing network discovery function is enabled, you can view the self-organizing role of the device on the Device Details page.

The menus on the Web page vary depending on whether the self-organizing network discovery function is enabled. (For details, see Section [1.7 Switching Between Management Pages](#).) Find the configuration entry for this function according to the instructions in Configuration Steps below.

3.1.3 Configuration Steps

Choose **Local Device > Overview > Device Details**.

Click the current work mode to edit the work mode.

Caution

After you switch the work mode, the device will restore factory settings and restart. Please proceed with caution.

Overview

Memory Usage

46%

Online Clients

1

Status: Online

Uptime: 1 hour 3 minutes 9 seconds

Systemtime: 2022-04-24 15:00:15

Device Details

Model: EG

SN: MACCEGWELY01

Work Mode: Router [?](#)

Hardware Ver: 1.00

Hostname: Ruijie [?](#)

MAC: 00:D0:F8:15:79:45

Role: Master AC [?](#)

Software Ver: ReyeOS 1.86.1611

AC function switch: If a device works in the router mode and the self-organizing network discovery function is enabled, you can enable or disable the AC function. After the AC function is enabled, the device in the router mode supports the virtual AC function and can manage downlink devices. If this function is disabled, the device needs to be elected as an AC in self-organizing network mode and then manage downlink devices.

Description:

1. The device IP address may change upon mode change.
2. Change the endpoint IP address and ping the device.
3. Enter the new IP address into the address bar of the browser to access EWEB.
4. The system menu varies with different work modes.

Work Mode Router [?](#)Self-Organizing [?](#) [?](#) **Tip**

Network

AC [?](#)

Save

3.1.4 Viewing the Self-Organizing Role

Choose **Local Device** > **Overview** > **Device Details**.

After the self-organizing network discovery function is enabled, you can view the self-organizing role of the device on the **Device Details** page.

Master AP/AC: The device functions as an AC to manage downlink devices.

Slave AP: The device connects to the AC in self-organizing mode and is managed by the AC. Slave APs are uniformly managed by the master AP/AC. Some wireless network configurations cannot be modified separately in local mode, and must be delivered by the master AP/AC.

Overview

Memory Usage 46%	Online Clients 1	Status: Online Uptime: 1 hour 6 minutes 16 seconds System: 2022-04-24 15:03:22
----------------------------	----------------------------	---

Device Details

Model: EG 	Hostname: Ruijie ↗
SN: MACCEGWELY01	MAC: 00:D0:F8:15:79:45
Work Mode: Router ↗	Role: Master AC ?
Hardware Ver: 1.00	Software Ver: ReyeeOS 1.86.1611

3.2 Configuring the WAN Ports

Choose **Local Device > Basics > WAN**.

You can configure multi-line access for the device to allow multiple lines to work simultaneously. After you switch to multi-line access, you need to specify the egress provider of the lines and set the load balancing mode, in addition to setting basic network parameters for the WAN ports.

Caution

The number of lines supported varies with the product. The actual configuration prevails.

3.2.1 Configuring the Internet Access Mode

Choose **Local Device > Basics > WAN > Single Line/Dual-Line/Three Lines/Four Lines**.

The device can access the WAN in one of the following three methods: static IP, DHCP, and PPPoE dialing. Select a proper method based on the actual broadband line type. For details, see Section [1.5 Configuration Wizard \(Router Mode\)](#).

Configure WAN settings.

Single Line **Dual-Line** Three Lines Four Lines

WAN WAN1 ISP/Load Settings

* Internet Static IP

* IP 172.26.1.200

* Subnet Mask 255.255.255.0

* Gateway 172.26.1.1

* DNS Server 192.168.58.94

----- [Advanced Settings](#) -----

Save

3.2.2 Modifying the MAC Address

Choose **Local Device > Basics > WAN > Single Line/Dual-Line/Three Lines/Four Lines > Advanced Settings**.

Sometimes, the provider restricts Internet access of devices with unknown MAC addresses out of security considerations. In this case, you can change the MAC addresses of the WAN ports to valid MAC addresses.

Click **Advanced Settings**, enter a MAC address, and click **Save**. You do not need to modify the default MAC address unless otherwise specified.

WAN	WAN1	ISP/Load Settings
* Internet	Static IP	
* IP	172.26.1.200	
* Subnet Mask	255.255.255.0	
* Gateway	172.26.1.1	
* DNS Server	192.168.58.94	
----- Advanced Settings -----		
* MTU	1500	
* MAC	00:d0:f8:15:08:4a	
802.1Q Tag	<input type="checkbox"/>	

3.2.3 Modifying the MTU

Choose **Local Device > Basics > WAN > Single Line/Dual-Line/Three Lines/Four Lines > Advanced Settings**.

MTU specifies the maximum transmission unit allowed to pass a WAN port. By default, the MTU of a WAN port is 1500 bytes. Sometimes, large data packets are limited in transmission speed or prohibited in the ISP network, leading to slow network speed or even network disconnection. If this occurs, you can set the MTU to a smaller value.

----- Advanced Settings -----		
* MTU	1500	
* MAC	00:d0:f8:15:08:4a	
802.1Q Tag	<input type="checkbox"/>	

3.2.4 Configuring the Private Line

Choose **Local Device > Basics > WAN > Single Line/Dual-Line/Three Lines/Four Lines > Advanced Settings**.

Turn on **Private Line** and determine whether to set the current WAN line as a private line. Generally, private lines are used for access to specific internal networks but not the Internet. Private lines provide higher network security.

----- Advanced Settings -----

* MTU

* MAC

802.1Q Tag

Private Line ?

3.2.5 Configuring the VLAN Tag

Choose **Local Device > Basics > WAN > Single Line/Dual-Line/Three Lines/Four Lines > Advanced Settings**.

Some ISPs require that packets transmitted to their networks carry VLAN IDs. In this case, you can enable the VLAN tag function and set a VLAN ID for the WAN port. By default, the VLAN tag function is disabled. You are advised to keep the VLAN tag function disabled unless otherwise specified.

----- Advanced Settings -----

* MTU

* MAC

802.1Q Tag

* VLAN ID

3.2.6 Configuring the Multi-Line Load Balancing Mode

Choose **Local Device > Basics > WAN > Single Line/Dual-Line/Three Lines/Four Lines > ISP/Load Settings > Load Balancing Settings**.

When multiple lines are available, some traffic is forwarded along the line selected based on the address library and the remaining traffic is distributed to other lines in load balancing mode.

Table 3-1 Load balancing modes

Load Balancing Mode	Description
Balanced	The traffic will be spread across multiple links according to the weight of each WAN port. Larger traffic will be distributed to the WAN port with a higher weight. When you select this mode, you must specify the weight of each WAN port. For example, if WAN and WAN 1 weight are set to 3 and 2 respectively, 60% of the total traffic will be routed over WAN and 40% over WAN 1.
Primary & Secondary	All traffic is routed over the primary interface. Once the primary interface fails, traffic will be switched over to the secondary interface. If there are multiple primary or secondary interfaces, please configure their weight. (See balanced mode.)

[WAN](#)
[WAN1](#)
[ISP/Load Settings](#)

Load Balancing Settings

Traffic will be routed based on ISP settings preferentially. The remaining traffic will be managed according to load mode.

1. Balanced mode: The traffic will be spread across multiple links according to the weight of each WAN port. For example, if WAN and WAN1 weight are set to 3 and 2 respectively, 60% of the total traffic will be routed over WAN and 40% over WAN1.
2. Primary & secondary mode: All traffic is routed over the primary interface. Once the primary interface fails, traffic will be switched over to the secondary interface. If there are multiple primary and secondary interfaces, please configure their weight (See balanced mode).

Load Mode

Balancing Policy

If you fail to access online bank service, please select Based on Src IP Address.

* WAN Weight

* WAN1 Weight

Save

After you set the load balancing mode to balanced, you can configure load balancing policies.

Table 3-2 Load balancing policies

Load Balancing Policy	Description
Based on Link	After you enable this policy, the traffic is routed over multiple links based on the links. Packets with the same source IP address, destination IP address, source port, destination port, and protocol are routed over the same link.

Load Balancing Policy	Description
Based on Src IP Address	After you enable this policy, the traffic is routed over multiple links based on the source IP address. The traffic from the same user (same source IP address) will be routed to the same outbound interface. This policy prevents traffic from the same user from being routed to different links, lowering the risks of network access exceptions.
Based on Src and Dest IP Address	After you enable this policy, the traffic is routed over multiple links based on the source IP address and destination. The traffic of the same source IP address and destination IP address will be routed to the same outbound interface.
Smart Load Balancing	After you enable this feature, the traffic is routed over multiple links based on the link bandwidth, the actual loads of the links, application recognition and traffic prediction.

3.3 Configuring the LAN Ports

3.3.1 Modifying the LAN Port IP Address

Choose **Local Device > Basics > LAN > LAN Settings**.

Click **Edit**. In the dialog box that appears, enter the IP address and subnet mask, and then click **OK**. After you modify the LAN port IP address, you need to enter the new IP address in the browser to log in to the device again before you can configure and manage this device.

LAN Settings DHCP Clients Static IP Addresses DHCP Option DNS Proxy

LAN Settings ?

LAN Settings + Add Delete Selected

Up to 8 entries can be added.

<input type="checkbox"/>	IP	Subnet Mask	VLAN ID	Remark	DHCP Server	Start	IP Count	Lease Time(Min)	Action
<input type="checkbox"/>	172.26.1.244	255.255.255.0	Default VLAN	-	Disabled	172.26.1.1	254	30	Edit Delete

Edit ×

* IP

* Subnet Mask

Remark

* MAC

DHCP Server

3.3.2 Modifying the MAC Address

Choose **Local Device > Basics > LAN > LAN Settings**.

If a static Address Resolution Protocol (ARP) entry (binding between IP address and MAC address of the gateway) is configured to prevent ARP attacks to clients in the LAN, the gateway IP address remains unchanged but its MAC address changes when the gateway is replaced. As a result, the client may fail to learn the gateway MAC address. You can modify the static ARP entry of the client to prevent this problem. You can also change the LAN port MAC address of the new device to the MAC address of the original device to allow clients in the LAN to access the Internet normally.

Click **Edit**. In the dialog box that appears, enter the MAC address, and then click **OK**. You do not need to modify the default LAN port MAC address unless otherwise specified.

Edit ×

* IP

* Subnet Mask

Remark

* MAC


DHCP Server

3.3.3 Configuring ARP Guard

After ARP guard is enabled, only devices configured with IP-MAC binding on the LAN are allowed to access the external network.


Before enabling ARP guard, configure ARP binding. For specific steps, see [3.10.2 Configuring ARP Binding](#).

(1) Enable ARP guard.

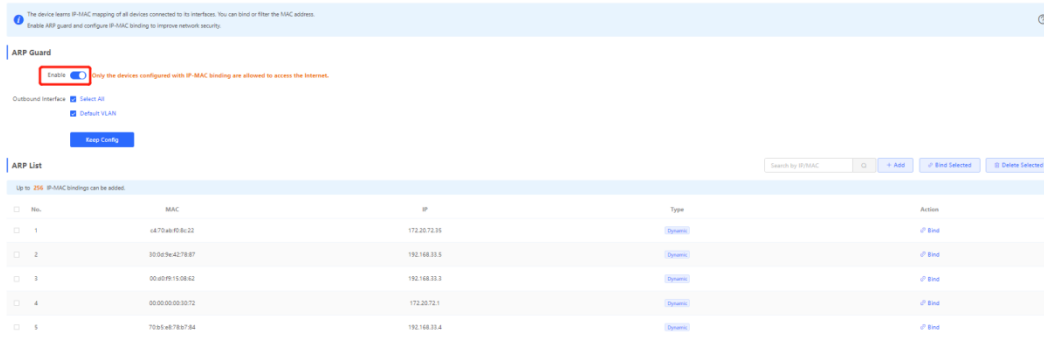

(1) Select an effective port.

If you select **Select All**, the configuration will take effect on all clients on the LAN. If you select a specified port, the configuration will take effect only on clients connected to the port.

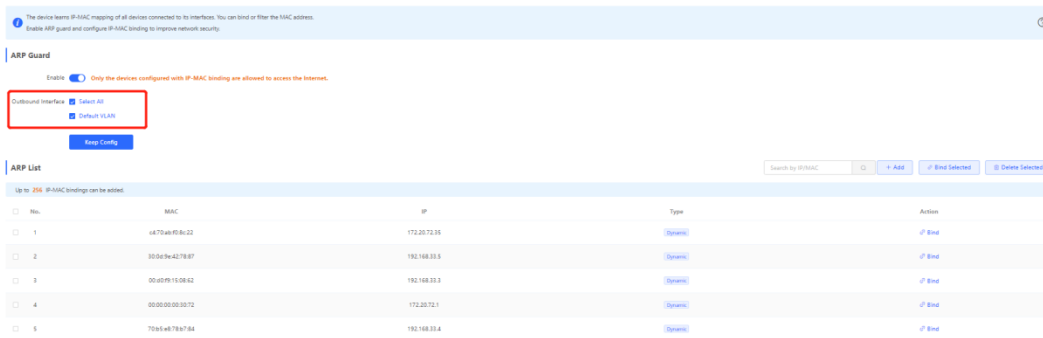

3.4 Configuring VLAN

3.4.1 VLAN Overview

Virtual Local Area Network (VLAN) is a communication technology that divides a physical LAN into multiple logical broadcast domains. Each VLAN has independent broadcast domains. Hosts in the same VLAN can directly communicate with each other, while hosts in different VLANs cannot as they are isolated at Layer 2. Compared with traditional Ethernet, VLAN has the following advantages:

- Control broadcast storms: Broadcast packets can only be forwarded inside a VLAN. This saves bandwidth as the performance of a VLAN is not affected by broadcast storms of other VLANs.
- Enhance LAN security: As a VLAN is divided into multiple broadcast domains, packets of different VLANs in a LAN are isolated. Different VLAN users cannot directly communicate, enhancing network security.
- Simplify network management: The VLAN technology can be used to divide the same physical network into different logical networks. When the network topology changes, you only need to modify the VLAN configuration, simplifying network management.

3.4.2 Creating a VLAN

Choose **Local Device** > **Basics** > **LAN** > **LAN Settings**.

A LAN can be divided into multiple VLANs. Click **Add** and create a VLAN.

LAN Settings DHCP Clients Static IP Addresses DHCP Option DNS Proxy

LAN Settings + Add Delete Selected

Up to 8 entries can be added.

<input type="checkbox"/>	IP	Subnet Mask	VLAN ID	Remark	DHCP Server	Start	IP Count	Lease Time(Min)	Action
<input type="checkbox"/>	172.26.1.244	255.255.255.0	Default VLAN	-	Disabled	172.26.1.1	254	30	Edit Delete

Add ×

* IP

* Subnet Mask

* VLAN ID

Remark

* MAC

DHCP Server

* Start

* IP Count

* Lease Time(Min)

DNS Server 192.168.120.1 ⓘ

Table 3-3 VLAN configuration

Parameter	Description
IP	Configure an IP address for the VLAN interface. This IP address is used as the default gateway for the LAN devices that need to access the Internet.
Subnet Mask	Configure an IP address subnet mask for the VLAN interface.
VLAN ID	Configure the VLAN ID.
Remark	Enter the VLAN description.
MAC	Configure a MAC address for the VLAN interface.
DHCP Server	Enable the DHCP server function. After this function is enabled, devices in the LAN can automatically obtain IP addresses. You also need to specify the start address for IP address allocation by the DHCP server, the number of IP addresses that can be allocated, and the address lease. You can also configure DHCP Options. For details, see Section 3.7.3 Configuring the DHCP Server .

 **Caution**

The VLAN configuration is associated with the uplink configuration. Exercise caution when you perform this operation.


3.4.3 Configuring a Port VLAN

Choose **Local Device > Basics > Port VLAN**.

This page displays the VLAN division of the current port. Create VLANs on the **LAN Settings** page and then configure the port based on the VLANs on this page. For details, see Section [3.4.2 Creating a VLAN](#).

Click the check box under a port and select the relationship between VLAN and port from the drop-down list box.

- **UNTAG:** Configure the VLAN as the native VLAN of the port. When the port receives packets from the specified VLAN, the port removes the VLAN ID before forwarding the packets. When the port receives packets without a VLAN ID, the port adds this VLAN ID to the packets before forwarding them. You can set only one VLAN of the port to UNTAG.
- **TAG:** Configure the port to allow packets with this VLAN ID to pass. This VLAN is not the native VLAN. When the port receives packets from the specified VLAN, it forwards the packets with the original VLAN ID.
- **Not Join:** Configure the port to deny packets with this VLAN ID to pass. For example, if you set VLAN 10 and VLAN 20 to **Not Join** for port 2, port 2 will not receive packets from VLAN 10 and VLAN 20.

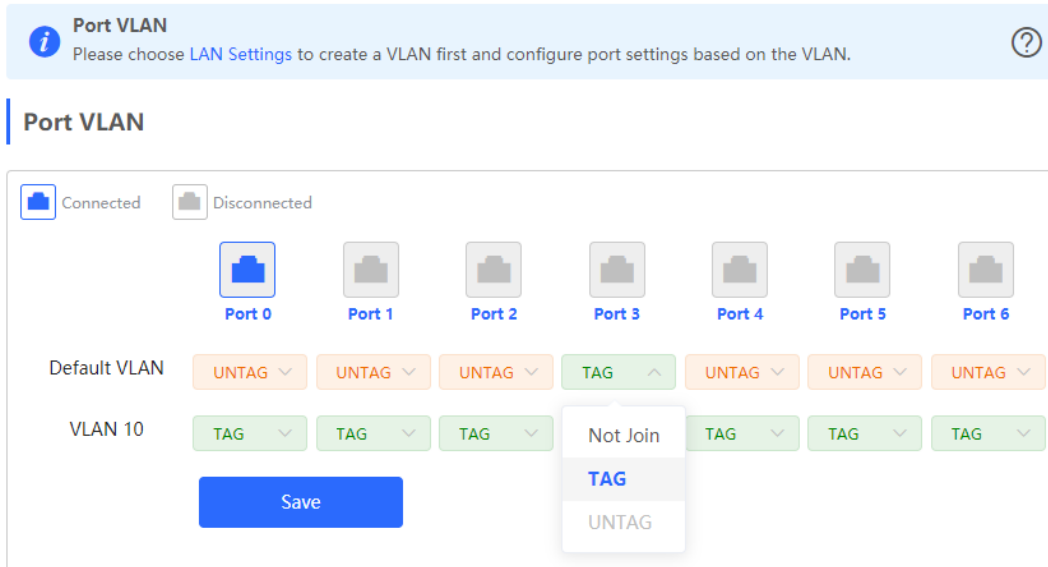


3.5 Configuring DNS

3.5.1 Local DNS

When the WAN interface runs DHCP or PPPoE protocol, the device automatically obtains the DNS server address. If the upper-layer device does not deliver the DNS server address or the DNS server needs to be changed, you can manually configure a new DNS server.

Choose **Local Device > Advanced > Local DNS**.

Local DNS server: Configure the DNS server address used by the local device. If multiple addresses exist, separate them with spaces.

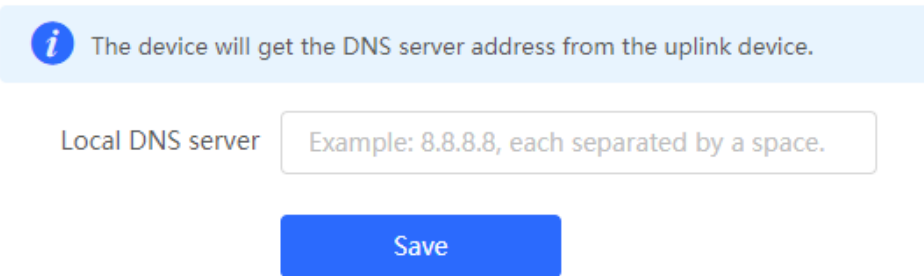

3.5.2 DNS Proxy


DNS proxy is optional configuration. By default, the device obtains the DNS server address from the upper-layer device.

Choose **Local Device > Basics > LAN > LAN Settings**.

DNS Proxy: By default, the DNS proxy is disabled, and the DNS address delivered by the ISP is used. If the DNS configuration is incorrect, the device may fail to parse domain names and network access will fail. It is recommended to keep the DNS proxy disabled.

DNS Server: Enable clients to access the Internet by using the DNS server address delivered by the upper-layer device. The default settings are recommended. After the DNS proxy is enabled, you need to enter the DNS server IP address. The DNS settings vary with the region. Consult the local ISP for details.

[LAN Settings](#)[DHCP Clients](#)[Static IP Addresses](#)[DHCP Option](#)[DNS Proxy](#)

 DNS proxy is not required. The device will obtain the DNS server address from the uplink device by default.

Enable * DNS Server

3.6 Configuring IPv6

3.6.1 IPv6 Overview

Internet Protocol Version 6 (IPv6) is the next-generation IP protocol designed by Internet Engineering Task Force (IETF) to substitute IPv4. It is used to compensate insufficient IPv4 network addresses.

3.6.2 IPv6 Basics

1. IPv6 Address Format

IPv6 extends 32-bit IPv4 address into 128 bits, providing wider address space than IPv4.

The basic format of an IPv6 address is X:X:X:X:X:X:X. It is represented as eight groups of four hexadecimal digits (0-9, A-F), each group representing 16 bits. The groups are separated by colons (:). In this format, each X represents a group of four hexadecimal digits.

Samples of IPv6 addresses are 2001:ABCD:1234:5678:AAAA:BBBB:1200:2100, 800:0:0:0:0:0:1, and 1080:0:0:0:8:800:200C:417A.

The digit 0 in an IPv6 address can be suppressed as follows:

- Leading zeros in each 16-bit field are suppressed. For example, 2001:00CD:0034:0078:000A:000B:1200:2100 can be suppressed to 2001:CD:34:78:A:B:1200:2100.
- The long sequence of consecutive all-zero fields in some IPv6 addresses can be replaced with two colons (::). For example, 800:0:0:0:0:0:0:1 can be represented as 800::1. The two colons (::) can be used only when all the 16 bits in a group are 0s, and it can appear only once in an IPv6 address.

2. IPv6 Prefix

IPv6 addresses are typically composed of two logical parts:

- Network prefix: n bits, corresponding to the network ID in IPv4 addresses
- interface ID: $(128 - n)$ bits, corresponding to the host ID in IPv4 addresses

A slash (/) is used to separate the length of network prefix from an IPv6 address. For example, 12AB::CD30:0:0:0/60 indicates that the 60-bit network prefix in the address is used for route selection. IPv6 prefixes can be obtained from the IPv6 DHCP server, along with IPv6 addresses. A downlink DHCP server can also automatically obtain IPv6 prefixes from its uplink DHCP server.

3. Special IPv6 Addresses

There are some special IPv6 addresses:

fe80::/8: loopback address, similar to the IPv4 address 169.254.0.0/16

fc00::/7: local address, similar to IPv4 addresses 10.0.0.0/8, 172.16.0.0/16, and 192.168.0.0/16

ff00::/12: multicast address, similar to the IPv4 address 224.0.0.0/8

4. NAT66

IPv6-to-IPv6 Network Address Translation (NAT66) is a process of converting the IPv6 address in the IPv6 data packet header into another IPv6 address. NAT66 can be implemented by converting the prefix in an IPv6 address in an IPv6 data packet header into another IPv6 address prefix. NAT66 enables mutual access between an internal network and an external public network.

3.6.3 IPv6 Address Allocation Modes

- Manual configuration: IPv6 addresses, prefixes, and other network parameters are configured manually.
- Stateless Address Autoconfiguration (SLAAC): The link-local address is generated based on the interface ID, and the IPv6 address is automatically allocated based on the prefix information in the Router Advertisement (RA) packet.
- Stateful address allocation (DHCPv6): Two DHCPv6 allocation methods are as follows:
 - Automatic DHCPv6 allocation: The DHCPv6 server automatically allocates IPv6 addresses, prefixes, and other network parameters.
 - Automatic allocation of DHCPv6 Prefix Delegations (PDs): The lower-layer network device submits a prefix allocation application to the upper-layer network device. The upper-layer network device allocates an appropriate address prefix to the lower-layer device. The lower-layer device further divides the obtained prefix (usually less than 64 bits) into 64-bit prefixed subnet segments and advertises the address prefixes to the user link directly connected to the IPv6 host through the RA packet, implementing automatic address configuration for hosts.

3.6.4 Enabling the IPv6 Function

Choose **Local Device** > **Basics** > **IPv6 Address**.

Turn on **Enable** to enable the IPv6 function.

IPv6 Address



1. When IPv6 is enabled, The MTU of IPv4 WAN port need higher than 1280.
2. If you want to set more than one IPv6 LAN, please choose Port VLAN to set only one VLAN to UNTAG and set the other VLANs to Not Join.

Enable

3.6.5 Configuring an IPv6 Address for the WAN Port

Choose **Local Device** > **Basics** > **IPv6 Address** > **WAN Settings**.

After you enable the IPv6 function, you can set related parameters on the **WAN Settings** tab. The number of **WAN_V6** tabs indicates the number of WAN ports on the current device.

Enable

WAN Settings LAN Settings DHCPv6 Clients

WAN_V6

* Internet

No username or password is required for DHCP clients.

IPv6 Address

IPv6 Prefix

Gateway

DNS Server

NAT66

----- Advanced Settings -----

* Default Preference

Save

Table 3-4 IPv6 address configuration for WAN port

Parameter	Description
Internet	Configure a method for the WAN port to obtain an IPv6 address. <ul style="list-style-type: none"> ● DHCP: The current device functions as the DHCPv6 client, and it applies for an IPv6 address and prefix from the uplink network device. ● Static IP: You need to manually configure a static IPv6 address, gateway address, and DNS server. ● Null: The IPv6 function is disabled on the WAN port.
IPv6 Address	When Internet is set to DHCP , the automatically obtained IPv6 address is displayed. When Internet is set to Static IP , you need to configure this parameter manually.
IPv6 Prefix	When Internet is set to DHCP , the IPv6 address prefix automatically obtained by the current device is displayed.

Parameter	Description
Gateway	When Internet is set to DHCP , the automatically obtained gateway address is displayed. When Internet is set to Static IP , you need to configure this parameter manually.
DNS Server	When Internet is set to DHCP , the automatically obtained DNS server address is displayed. When Internet is set to Static IP , you need to configure this parameter manually.
NAT66	If the current device cannot access the Internet through DHCP or cannot obtain the IPv6 prefix, you need to enable the NAT66 function to allocate IPv6 addresses to clients on the internal network.
Default Preference	Set the default route preference for the current line. A smaller value indicates a higher preference. For the same destination address, the route with the highest preference is selected as the optimal route.


 **Caution**

The RG-EG105G and RG-EG105G-P does not support the NAT66 function.

3.6.6 Configuring an IPv6 Address for the LAN Port

Choose **Local Device** > **Basics** > **IPv6 Address** > **LAN Settings**.

When the device accesses the Internet through DHCP, it can obtain LAN port IPv6 addresses from the uplink device and allocate IPv6 addresses to the clients in the LAN based on the IPv6 address prefix. If the uplink device cannot allocate an IPv6 address prefix to the device, you need to manually configure an IPv6 address prefix for the LAN port and enable the NAT66 function to allocate IPv6 addresses to the clients in the LAN. For details, see Section [3.6.5 Configuring an IPv6 Address for the WAN Port](#).

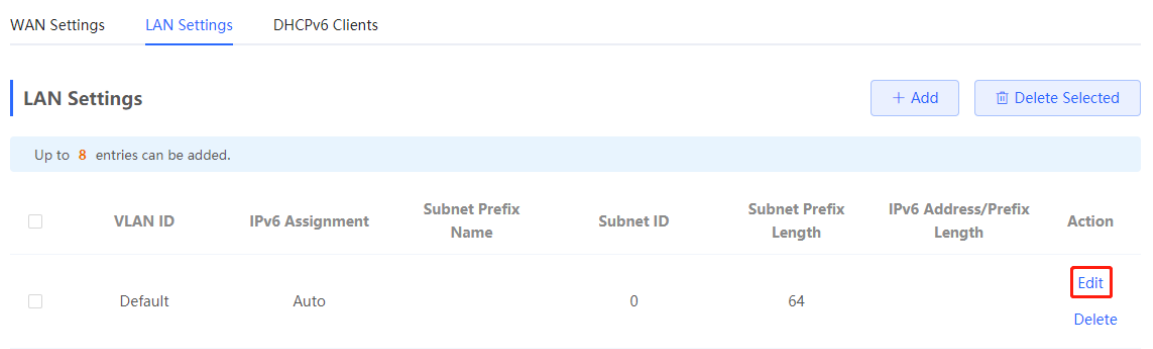

Click **Edit** next to the default VLAN, and set **IPv6 Address/Prefix Length** to a local address with no more than 64 bits. This address is also used as the IPv6 address prefix.

You can use either of the following methods to allocate IPv6 addresses to clients:

- **Auto**: Allocate IPv6 addresses to clients in DHCPv6 or SLAAC mode.

- **DHCPv6**: Allocate IPv6 addresses to clients through DHCPv6.
- **SLAAC**: Allocate IPv6 addresses to clients through SLAAC.
- **Null**: Do not allocate addresses to clients.

You should select an allocation method based on the protocol supported by clients on the internal network. If you are not sure about the supported protocol, select **Auto**.

Edit ×

IPv6 Assignment ?

IPv6 Address/Prefix ?

Length

----- [Advanced Settings](#) -----

Click **Advanced Settings** to configure more address attributes.

Edit ×

IPv6 Assignment ?

IPv6 Address/Prefix ?

Length

----- [Advanced Settings](#) -----

Subnet Prefix Name ?

Subnet Prefix Length ?

Subnet ID ?

* Lease Time(Min) ?

DNS Server


Table 3-5 IPv6 address configuration for LAN port

Parameter	Description
Subnet Prefix Name	Specify the interface from which the prefix is obtained, such as WAN_V6 or WAN1_V6 . By default, the device obtains prefixes from all interfaces.
Subnet Prefix Length	Specify the length of the subnet prefix. The value is in the range of 48 to 64.
Subnet ID	Configure the subnet ID in the hexadecimal format. The value 0 indicates auto increment.
Lease Time(Min)	Set the lease of the IPv6 address, in minutes.
DNS Server	Configure the IPv6 DNS server address.


3.6.7 Viewing the DHCPv6 Client

Choose **Local Device > Basics > IPv6 Address > DHCPv6 Clients**.

When the device functions as a DHCPv6 server to allocate IPv6 addresses to clients, you can view the information about the client that obtains an IPv6 address from the device on the current page. The client information includes the host name, IPv6 address, remaining lease time, and DHCPv6 Unique Identifier (DUID).

Enter the DUID in the search bar and click  to quickly find relative information of the specified DHCPv6 client.


IPv6 Address

 1. When IPv6 is enabled, The MTU of IPv4 WAN port need higher than 1280.
2. If you want to set more than one IPv6 LAN, please choose Port VLAN to set only one VLAN to UNTAG and set the other VLANs to Not Join.

Enable

WAN Settings LAN Settings DHCPv6 Clients

DHCPv6 Clients

 You can view the DHCPv6 clients information on this page.

DHCPv6 Clients Search by DUID

No.	Hostname	IPv6 Address	Remaining Lease Time(min)	DUID
No Data				

3.7 Configuring a DHCP Server

3.7.1 DHCP Server Overview

After the DHCP server function is enabled in the LAN, the device can automatically deliver IP addresses to clients, so that clients connected to the LAN ports of the device or connected to Wi-Fi can access the Internet using the obtained addresses.

See Section [3.6.6 Configuring an IPv6 Address for the LAN Port](#) for more information about the DHCPv6 server function.

3.7.2 Address Allocation Mechanism

The DHCP server allocates an IP address to a client in the following way:

- (1) When the device receives an IP address request from a DHCP client, the device searches the DHCP static address allocation list. If the MAC address of the DHCP client is in the DHCP static address allocation list, the device allocates the corresponding IP address to the DHCP client.
- (2) If the MAC address of the DHCP client is not in the DHCP static address allocation list or the IP address that the DHCP client applies is not in the same network segment as the LAN port IP address, the device selects an IP address not used from the address pool and allocates the address to the DHCP client.
- (3) If no IP address in the address pool is allocatable, the client will fail to obtain an IP address.

3.7.3 Configuring the DHCP Server

1. Configuring Basic Parameters

Choose **Local Device > Basics > LAN > LAN Settings**.

DHCP Server: The DHCP server function is enabled by default in the router mode. You are advised to enable the function if the device is used as the sole router in the network. When multiple routers are connected to the upper-layer device through LAN ports, disable this function.

 **Caution**

If the DHCP server function is disabled on all devices in the network, clients cannot automatically obtain IP addresses. You need to enable the DHCP server function on one device or manually configure a static IP address for each client for Internet access.

Start: Enter the start IP address of the DHCP address pool. A client obtains an IP address from the address pool. If all the addresses in the address pool are used up, no IP address can be obtained from the address pool.

IP Count: Enter the number of IP addresses in the address pool.

Lease Time(Min): Enter the address lease term. When a client is connected, the leased IP address is automatically renewed. If a leased IP address is not renewed due to client disconnection or network instability, the IP address will be reclaimed after the lease term expires. After the client connection is restored, the client can request an IP address again. The default lease term is 30 minutes.

LAN Settings DHCP Clients Static IP Addresses DHCP Option DNS Proxy

LAN Settings + Add Delete Selected

Up to 8 entries can be added.

<input type="checkbox"/>	IP	Subnet Mask	VLAN ID	Remark	DHCP Server	Start	IP Count	Lease Time(Min)	Action
<input checked="" type="checkbox"/>	192.168.110.1	255.255.255.0	Default VLAN	-	Enabled	192.168.110.1	254	30	Edit Delete
<input type="checkbox"/>	192.168.120.1	255.255.255.0	10	-	Enabled	192.168.120.1	254	30	Edit Delete

Edit ×

* IP

* Subnet Mask

Remark

* MAC

DHCP Server

* Start

* IP Count

* Lease Time(Min)

DNS Server 192.168.110.1 ⓘ

1. Configuring DHCP Option

Choose **Local Device > Basics > LAN > DHCP**.

The DHCP Option configuration is shared by all LAN ports. You can configure DHCP Option based on actual needs.

LAN Settings DHCP Clients Static IP Addresses DHCP Option DNS Proxy

ⓘ DHCP Option
DHCP option settings are applied to all LAN ports.

DNS Server

Option 43 ⓘ

Option 138

Option 150


Table 3-6 DHCP Option configuration

Parameter	Description
DNS Server	Enter the DNS server address provided by the ISP.
Option 43	When the AC (wireless controller) and the AP are not in the same LAN, the AP cannot discover the AC through broadcast after obtaining an IP address from the DHCP server. To enable the AP to discover the AC, you need to configure Option 43 carried in the DHCP response packet on the DHCP server.
Option 138	Enter the IP address of the AC. Similar to Option 43, when the AC and AP are not in the same LAN, you can configure Option 138 to enable the AP to obtain the IPv4 address of the AC.
Option 150	Enter the IP address of the TFTP server. The TFTP server allocates addresses to clients.

3.7.4 Viewing the DHCP Client

Choose **Local Device > Basics > LAN > DHCP Clients**.

View the client addresses automatically allocated by thorough DHCP. Find the target client and click **Convert to Static IP** in the **Status** column, or select desired clients and click **Batch Convert**. The dynamic address allocation relationship is added to the static address allocation list, so that the host can obtain the bound IP address for each connection. For details on how to view the static address allocation list, see Section [3.7.5 Configuring Static IP Addresses](#).

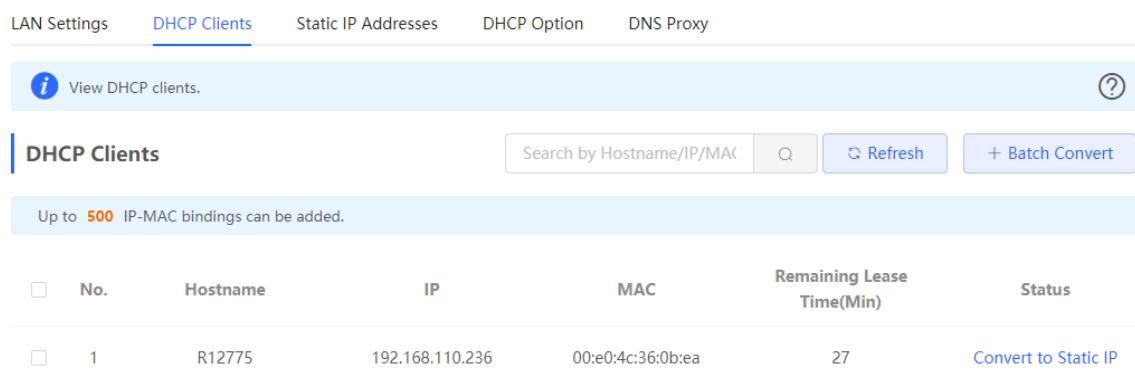

3.7.5 Configuring Static IP Addresses

Choose **Local Device > Basics > LAN Static IP Addresses**.

The page displays all configured static IP addresses.

Click **Add**. In the pop-up window, enter the MAC address and IP address of the client to be bound, and click **OK**. After a static IP address is bound, the bound IP address will be obtained each time the client connects to the network.

LAN Settings DHCP Clients **Static IP Addresses** DHCP Option DNS Proxy

Static IP Address List ?

Static IP Address List Search by IP/MAC **+ Add**

Up to **300** entries can be added.

<input type="checkbox"/>	No.	IP	MAC	Action
No Data				

Add ×

* IP

* MAC

3.8 Static Routes

Choose **Local Device > Advanced > Routing > Static Routing**.

Static routes are manually configured by the user. When a data packet matches a static route, the packet will be forwarded according to the specified forwarding mode.

⚠ Caution

Static routes cannot automatically adapt to changes of the network topology. When the network topology changes, you need to reconfigure the static routes.

Click **Add**. In the dialog box that appears, enter the destination address, subnet mask, outbound interface, and next-hop IP address to create a static route.

PBR **Static Routing**

Static Routing ?
 When a packet arrives, the device checks the destination field and compares it with routing table. If it finds a match for destination network then it will forward that packet from the specified interface.

Static Route List

Up to **100** entries can be added.

<input type="checkbox"/>	Dest IP Address	Subnet Mask	Outbound Interface	Next Hop	Reachable	Action
<input type="checkbox"/>	192.168.110.0	255.255.255.0	WAN	172.26.1.209	Yes	Edit Delete

Add
×

* Dest IP Address

* Subnet Mask

* Outbound Interface ▾

* Next Hop

Table 3-7 Static route configuration

Parameter	Description
Dest IP Address	Specify the destination network to which the data packet is to be sent. The device matches the data packet based on the destination address and subnet mask.
Subnet Mask	Specify the subnet mask of the destination network. The device matches the data packet based on the destination address and subnet mask.
Outbound Interface	Specify the interface that forwards the data packet.
Next Hop	Specify the IP address of the next hop in the route for the data packet. If the outbound interface accesses the Internet through PPPoE dialing, you do not need to configure the next-hop address.

After a static route is created, you can find the relevant route configuration and reachability status in the static route list. The **Reachable** parameter specifies whether the next hop is reachable, based on which you can determine whether the route takes effect. If the value is **No**, check whether the outbound interface in the current route can ping the next-hop address.

Static Route List
+ Add
Delete Selected

Up to **100** entries can be added.

	Dest IP Address	Subnet Mask	Outbound	Next Hop	Reachable	
<input type="checkbox"/>	192.168.2.0	255.255.255.0	WAN	172.26.1.1	No	Edit Delete

The route is unreachable. Please initiate a Ping test from the outbound interface to the next hop.

3.9 PBR

3.9.1 Overview

Policy-based routing (PBR) is a mechanism for routing and forwarding based on user-specified policies. When a router forwards data packets, it filters the packets according to the configured rules, and then forwards the matched packets according to the specified forwarding policy. The PBR feature enables the device to formulate rules according to specific fields (source or destination IP address and protocol type) in the data packets, and forward the data packets from a specific interface.

In a multi-line scenario, if the device is connected to the Internet and the internal network through different lines, the traffic will be evenly routed over the lines if no routing settings are available. In this case, access data to the internal network may be sent to the external network, or access data to the external network may be sent to the internal network, resulting in network exceptions. To prevent these exceptions, you need to configure PBR to control data isolation and forwarding on the internal and external networks.



The device can forward data packets using either of the following three policies: PBR, address-based routing, and static routing. When all the policies exist, PBR, static routing, and address-based routing have descending order in priority. For details on address-based routing, see Section [3.2.6 Configuring the Multi-Line Load Balancing Mode](#).

3.9.2 Configuration Steps

Choose **Local Device > Advanced > Routing > PBR**.

Click **Add** to add a PBR rule.

[PBR](#) Static Routing

PBR
 **Route Priority:** PBR > Static Routing > ISP Routing.
Description PBR is more flexible than destination-based routing. 

PBR List + Add Delete Selected

Up to **30** entries can be added.

<input type="checkbox"/>	Name	Protocol Type	Src IP Address	Dest IP Address	Src Port Range	Dest Port Range	Outbound Interface	Status	Action
No Data									

Add PBR
×

* Name

Protocol Type

Src IP/IP Range

Dest IP/IP Range

* Custom Dest IP

Outbound Interface

Status



Table 3-8 PBR configuration

Parameter	Description
Name	Specify the name of the PBR rule, which uniquely identifies a PBR rule. The name must be unique for each rule.
Protocol Type	Specify the protocol to which the PBR rule is effective. You can set this parameter to IP , ICMP , UDP , TCP , or Custom .
Protocol Number	When Protocol Type is set to Custom , you need to enter the protocol number.
Src IP/IP Range	Configure the source IP address or IP address range for matching PBR entries. The default value is All IP Addresses. <ul style="list-style-type: none"> ● All IP Addresses: Match all the source IP addresses. ● Custom: Match the source IP addresses in the specified IP range.
Custom Src IP	When Src IP/IP Range is set to Custom , you need to enter a single source IP address or a source IP range.
Dest IP/IP Range	Configure the destination IP address or IP address range for matching PBR entries. The default value is All IP Addresses. <ul style="list-style-type: none"> ● All IP Addresses: Match all the destination IP addresses. ● Custom: Match the destination IP addresses in the specified IP range.

Parameter	Description
Custom Dest IP	When Dest IP/IP Range is set to Custom, you need to enter a destination source IP address or a destination IP range.
Src Port Range	This parameter is available only when Protocol Type is set to TCP or UDP. This parameter specifies the source port range for packet matching using PBR.
Dest Port Range	This parameter is available only when Protocol Type is set to TCP or UDP. This parameter specifies the destination port range for packet matching using PBR.
Outbound Interface	Specify the interface that forwards the data packet based on the hit PBR rule.
Status	Turn on Status to specify whether to enable the PBR rule. If Status is turned off, this rule does not take effect.



Note

If you want to restrict the access device to access only the specified internal network, you can set the outbound interface in the corresponding route to the WAN port in the private line network. For details on how to set the private line network, see Section [3.2.4 Configuring the Private Line](#).

All the created PBR policies are displayed in the PBR list, with the latest policy listed on the top. The device matches the policies according to their sorting in the list. You can manually adjust the policy matching sequence by clicking  or  in the **Match Order** column.

PBR List
+ Add
Delete Selected

Up to 30 entries can be added.

<input type="checkbox"/>	Name	Protocol Type	Src IP Address	Dest IP Address	Src Port Range	Dest Port Range	Outbound Interface	Status	Match Order	Action
<input type="checkbox"/>	test1	IP	2.2.2.2	3.3.3.3	-	-	WAN	Enable 	↓	Edit Delete
<input type="checkbox"/>	test	IP	1.1.1.1	2.2.2.2	-	-	WAN	Enable 	↑	Edit Delete

3.9.3 Typical Configuration Example

1. Networking Requirements

Two lines with different bandwidths are deployed for an enterprise. Line A (WAN 1) is used for access to the Internet and Line B (WAN 2) is used for access to the specific internal network (10.1.1.0/24). The enterprise wants to configure PBR to guarantee correct data flows between the internal and external networks, isolate devices in the specified address range (172.26.31.1 to 172.26.31.200) from the external network, and allow these devices to access the specific internal network only.


2. Configuration Roadmap

- Configure the private line.
- Add a PBR policy for access to the internal network.
- Add a PBR policy for access to the external network.
- Add a PBR policy to restrict specific devices to access the internal network only.

3. Configuration Steps


(1) Configure WAN 2 as the private line for the internal network.

When you configure networking parameters for WAN 2 port, click **Advanced Settings**, turn on **Private Line**, and click **Save**. For details, see Section [3.2.4 Configuring the Private Line](#).

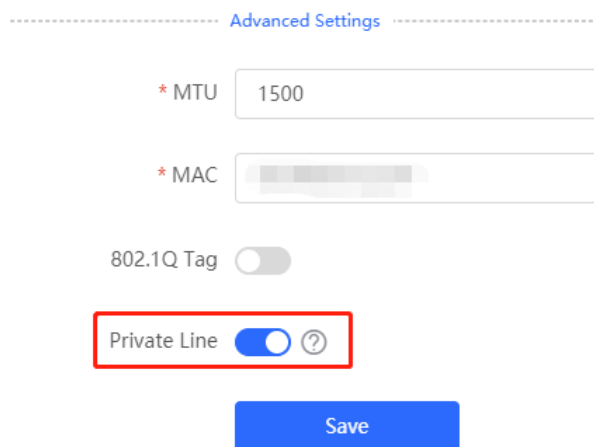

(2) Add a PBR policy to forward data packets destined to the external network through WAN 1 port.

Choose **Advanced > Routing > PBR** and click **Add**. In the dialog box that appears, create a PBR policy and set **Outbound Interface** to **WAN1**.

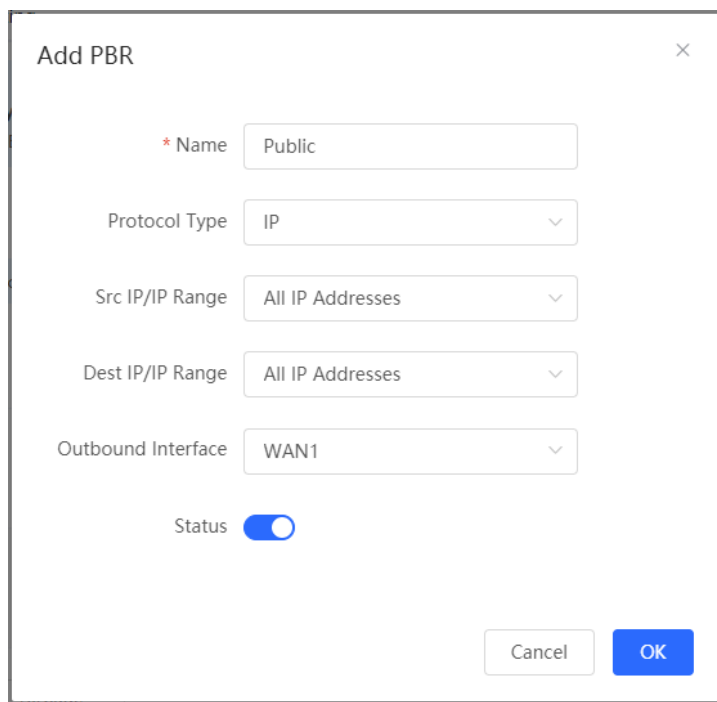


- (3) Add a PBR policy to forward data packets destined to the internal network through WAN 2 port. In this policy, set **Custom Dest IP** to 10.1.1.1-10.1.1.254 and **Outbound Interface** to WAN2.

The screenshot shows a configuration window titled "Add PBR". The fields are as follows:

- * Name: Private
- Protocol Type: IP
- Src IP/IP Range: All IP Addresses
- Dest IP/IP Range: Custom
- * Custom Dest IP: 10.1.1.1-10.1.1.254
- Outbound Interface: WAN2
- Status:

Buttons: Cancel, OK

- (4) Add a PBR policy to restrict devices in the IP range 172.26.31.1 to 172.26.31.200 to access the internal private line only. In this policy, set **Src IP/IP Range** to **Custom**, **Custom Src IP** to 172.26.31.1-172.26.31.200, and **Outbound Interface** to WAN2.

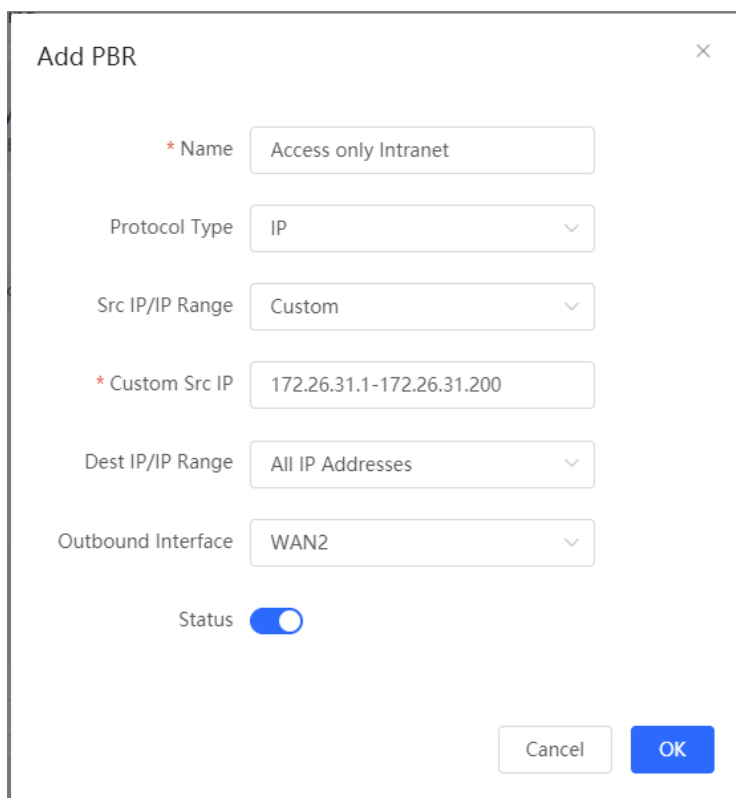

Add PBR

* Name: Access only Intranet

Protocol Type: IP

Src IP/IP Range: Custom

* Custom Src IP: 172.26.31.1-172.26.31.200

Dest IP/IP Range: All IP Addresses

Outbound Interface: WAN2

Status:

Cancel OK

3.10 Configuring ARP Binding and ARP Guard

3.10.1 Overview

The device learns the IP address and MAC address of the network devices connected to its interfaces and generates the corresponding ARP entries. You can enable ARP guard and configure IP-MAC binding to restrict Internet access of LAN hosts and improve network security.

3.10.2 Configuring ARP Binding

Choose **Local Device > Security > ARP List**.

Before you enable ARP guard, you must configure the binding between IP addresses and MAC addresses in either of the following ways:

- (1) Select a dynamic ARP entry in the ARP list and click **Bind**. You can select multiple entries to be bound at one time and click **Bind Selected** to bind them.

i The device learns IP-MAC mapping of all devices connected to its interfaces. You can bind or filter the MAC address.
 Enable ARP guard and configure IP-MAC binding to improve network security. **?**

ARP Guard

Enable **Only the devices configured with IP-MAC binding are allowed to access the Internet.**

ARP List Search by IP/MAC

Up to **256** IP-MAC bindings can be added.

No.	MAC	IP	Type	Action
<input type="checkbox"/> 1	00:e0:4c:36:0b:ea	192.168.110.236	Static	Edit Delete
<input checked="" type="checkbox"/> 2	30:0d:9e:7e:13:a1	172.26.1.1	Dynamic	Bind

(2) Click **Add**, enter the IP address and MAC address to be bound, and click **OK**. The input box can display existing address mappings in the ARP list. You can click a mapping to automatically enter the address mapping.

Add ✕

* IP

* MAC

00:e0:4c:36:0b:ea (192.168.110.236)

To remove the binding between a static IP address and a MAC address, click **Delete** in the **Action** column.

ARP List Search by IP/MAC

Up to **256** IP-MAC bindings can be added.


No.	MAC	IP	Type	Action
<input type="checkbox"/> 1	00:e0:4c:36:0b:ea	192.168.110.236	Static	Edit Delete
<input type="checkbox"/> 2	30:0d:9e:7e:13:a1	172.26.1.1	Dynamic	Bind

3.10.3 Configuring ARP Guard

After ARP guard is enabled, only LAN hosts with IP-MAC binding can access the external network. For details on how to configure ARP binding, see Section [3.10.2 Configuring ARP Binding](#).

(1) Choose Local Device > Security > ARP List.

(2) Turn on **Enable** in the **ARP Guard** section to enable ARP guard.

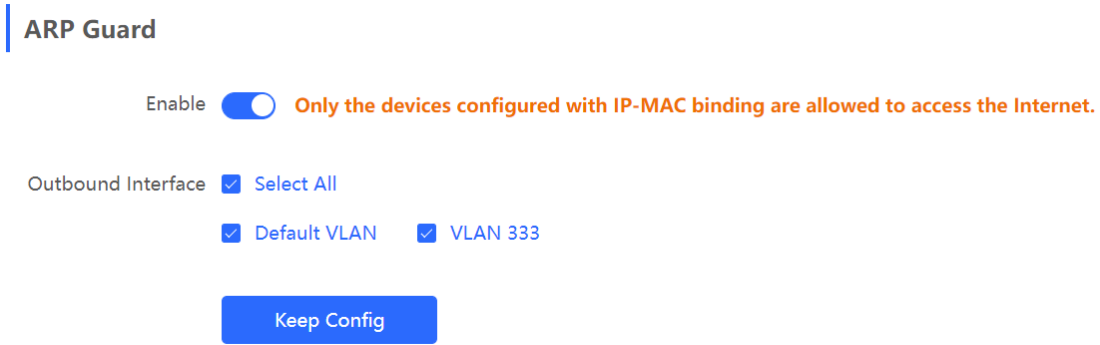

(3) Set the range for the function to take effect.

If you select **Select All**, the ARP guard function will take effect on all clients on the LAN. If you select a specified port, the ARP guard function will take effect only on clients connected to the port.

3.11 Configuring MAC Address Filtering

3.11.1 Overview


You can enable MAC address filtering and configure a whitelist or blacklist to effectively control Internet access from LAN hosts.


- Whitelist: Allow only hosts whose MAC addresses are in the filter rule list to access the Internet.
- Blacklist: Deny hosts whose MAC addresses are in the filter rule list from accessing the Internet.

3.11.2 Configuration Steps

Choose **Local Device > Security > MAC Filtering**.

(1) Click **Add**. In the dialog box that appears, enter the MAC address and remarks. The input box can display existing address mappings in the ARP list. You can click a mapping to automatically enter the MAC address. Click **OK**. A filter rule is created.

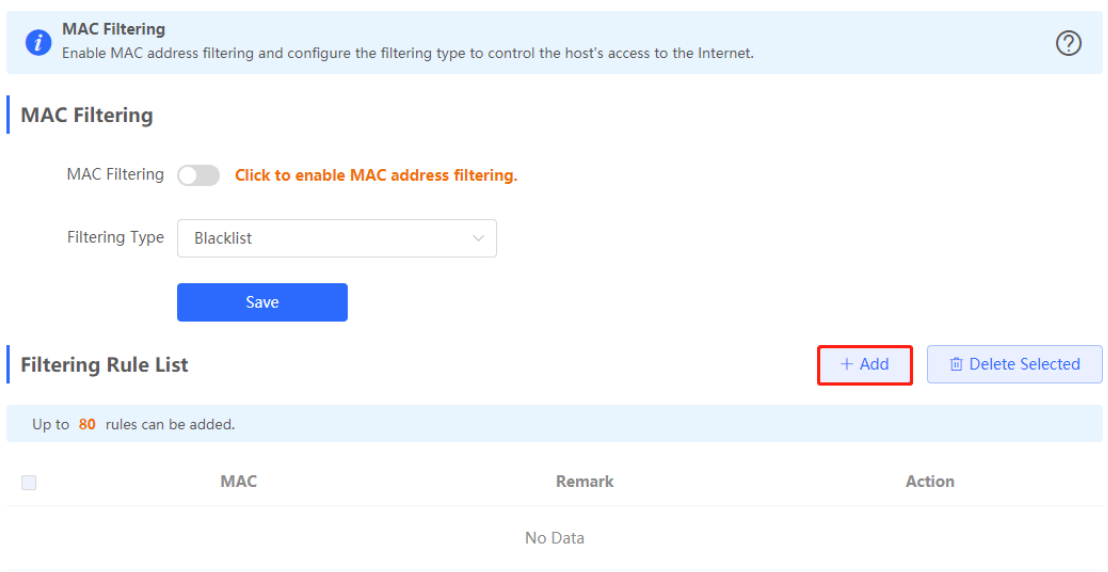


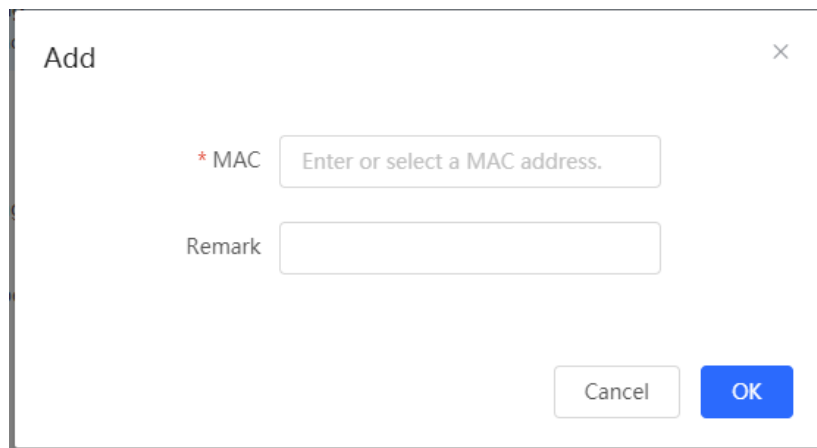

The screenshot shows a dialog box titled "Add" with a close button (X) in the top right corner. It contains two input fields: one for "* MAC" with the placeholder text "Enter or select a MAC address." and another for "Remark". At the bottom right, there are two buttons: "Cancel" and "OK".

(2) Turn on MAC Filtering, set Filtering Type, and click Save.

MAC Filtering

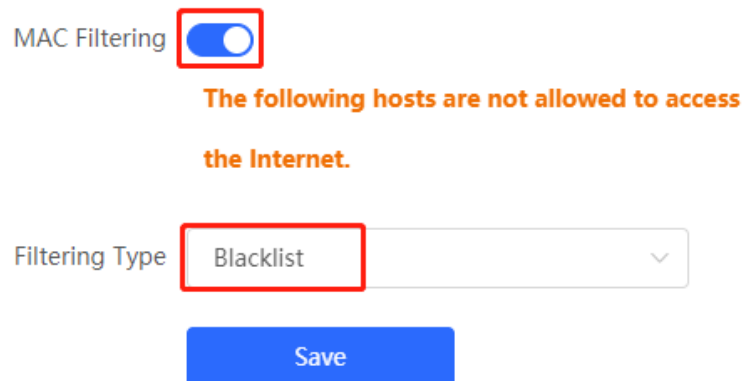

The screenshot shows the MAC Filtering configuration page. The "MAC Filtering" toggle switch is turned on and highlighted with a red box. Below it, a warning message states: "The following hosts are not allowed to access the Internet." The "Filtering Type" dropdown menu is set to "Blacklist" and is also highlighted with a red box. A "Save" button is located at the bottom.

3.12 Configuring the PPPoE Server

3.12.1 Overview

Point-to-Point Protocol over Ethernet (PPPoE) is a network tunneling protocol that encapsulates PPP frames inside Ethernet frames. When the router functions as a PPPoE server, it provides the access service to LAN users and supports bandwidth management.

3.12.2 Global Settings

Choose **Local Device > Advanced > PPPoE Server > Global Settings**.

Set **PPPoE Server** to **Enable** and configure PPPoE server parameters.

Global Settings Account Settings Account Management Exceptional IP Address Online Clients

Global Settings

i 1. MAC binding and MAC filtering are not valid for PPPoE clients.
 2. The IP address of the PPPoE server cannot overlap with any interface IP range.
 3. The authentication function is not valid for PPPoE clients.

PPPoE Server Enable Disabled

Mandatory PPPoE Dialup Enable Disable

* Local Tunnel IP

* IP Range

VLAN

Primary DNS Server

Secondary DNS Server

* Unanswered LCP Range: 1-60
 Packet Limit

Auth Mode PAP CHAP
 MSCHAP MSCHAP2

Table 3-9 PPPoE server configuration

Parameter	Description
PPPoE Server	Specify whether to enable the PPPoE server function.
Mandatory PPPoE Dialup	Specify whether LAN users must access the Internet through dialing.
Local Tunnel IP	Set the point-to-point address of the PPPoE server.
IP Range	Specify the IP address range that can be allocated by the PPPoE server to authenticated users.
VLAN	Set the VLAN of the current PPPoE server.
Primary/Secondary DNS Server	Specify the DNS server address delivered to authenticated users.
Unanswered LCP Packet Limit	When the number of LCP packets not answered in one link exceeds the specified value, the PPPoE server automatically disconnects the link.

Parameter	Description
Auth Mode	Select at least one authentication mode from the following: PAP, CHAP, MSCHAP, and MSCHAP2.

3.12.3 Configuring a PPPoE User Account

Choose **Local Device > Advanced > PPPoE Server > Account Settings**.

Click **Add** to create a PPPoE authentication user account. The currently created PPPoE authentication user accounts are displayed in the **Account List** section. Find the target account and click **Edit** to modify the account information. Find the target account and click **Delete** to delete the account.

Global Settings [Account Settings](#) Account Management Exceptional IP Address Online Clients

Account Settings ?

Account List [+ Add](#) [Delete Selected](#)

Up to **15** entries can be added. Clients **1**

<input type="checkbox"/>	Username	Password	Expire Date	Status	Account Management	Remark	Action
<input type="checkbox"/>	test	test	2022-04-30	Enable	-		Edit Delete

Add
✕

* Username

* Password

Expire Date

Remark

Status

Flow Control

* Account

Management

Table 3-10 PPPoE user account configuration

Parameter	Description
Username/Password	Set the username and password of the authentication account for Internet access through PPPoE dialing.
Expire Date	Set the expiration date of the authentication account. After the account expires, it can no longer be used for Internet access through PPPoE authentication.
Remark	Enter the account description.
Status	Specify whether to enable this user account. If the account is disabled, the account is invalid and cannot be used for Internet access through PPPoE authentication.

Parameter	Description
Flow Control	Specify whether to apply flow control on the account. If flow control is enabled, you need to configure flow control policies for the PPPoE authentication user. If smart flow control is disabled, Flow Control must be turned off. To turn on Flow Control , enable smart flow control first. For details on how to configure smart flow control, see Section 6.6.2 Smart Flow Control .
Account Management	After flow control is enabled, you need to configure a flow control package for the current account to restrict user bandwidth accordingly. For details on how to configure and view flow control packages, see Section 3.12.4 Configuring a Flow Control Package .

3.12.4 Configuring a Flow Control Package

Choose **Local Device > Advanced > PPPoE Server > Account Management**.

If smart flow control is disabled, the flow control package for the account does not take effect. Before you configure a flow control package, enable smart flow control first. For details on how to set smart flow control, see Section [6.6.2 Smart Flow Control](#).

Click **Add** to create a flow control package. The currently created flow control packages are displayed in the **Account Management List** section. You can modify or delete the packages.

Global Settings Account Settings Account Management Exceptional IP Address Online Clients

Account Management List						+ Add	Delete Selected
Up to 10 entries can be added.							
<input type="checkbox"/>	Account Name	Uplink Rate	Downlink Rate	Interface	Action		
<input type="checkbox"/>	test	CIR 100000Kbps PIR 100000Kbps PIR per User No Limit	CIR 100000Kbps PIR 100000Kbps PIR per User No Limit	WAN	Edit Delete		

Add ×

* Account Name

Uplink Rate * CIR Kbps * PIR Kbps PIR per User No Limit t

Downlink Rate * CIR Kbps * PIR Kbps PIR per User No Limit t

* Interface WAN

Cancel

Table 3-11 PPPoE user flow control package configuration

Parameter	Description
Account Name	Set the name of the flow control package. When you configure an authentication account, you can select a flow control package based on the name.
Uplink/Downlink CIR	Specify the uplink and downlink committed information rate (CIR) for the authentication account when the bandwidth is insufficient.
Uplink/Downlink PIR	Specify the uplink and downlink peak information rate (PIR) that can be used by the authentication account when the bandwidth is sufficient.
Uplink/Downlink PIR per User	Specify the PIR that can be consumed by each user. This parameter is optional. By default, the PIR per user is not limited.
Interface	Specify the interface to which the flow control package applies.

3.12.5 Configuring Exceptional IP Addresses

Choose **Local Device > Advanced > PPPoE Server > Exceptional IP Address**.

When the PPPoE server is enabled, if you want to allow some IP addresses in a specific VLAN to access the Internet without passing account and password authentication, you can configure these IP addresses as exceptional IP addresses.

The currently created exceptional IP addresses are displayed in the **Exceptional IP Address List** section. Click **Edit** to modify the exceptional IP address. Click **Delete** to delete the exceptional IP address.

Start IP Address/End IP Address: Start and end of exceptional IP addresses.

Remark: Description of an exceptional IP address.

Status: Whether the exceptional IP address is effective.

Global Settings
Account Settings
Account Management
Exceptional IP Address
Online Clients

Exceptional IP Address

Exceptional IP Address List

+ Add
Delete Selected

Up to **5** entries can be added.

	Start IP Address	End IP Address	Remark	Status	Action
<input type="checkbox"/>	172.26.1.2	172.26.1.100		Enable	Edit Delete

Add
×

* Start IP

Address

* End IP

Address

Remark

Status

Cancel OK

3.12.6 Viewing Online Users

Choose **Local Device > Advanced > PPPoE Server > Online Clients**.

View the information of end users that access the Internet through PPPoE dialing. Click **Disconnect** to disconnect the user from the PPPoE server.

Global Settings
Account Settings
Account Management
Exceptional IP Address
Online Clients

i Online Clients
?

Account List

Disconnect
Refresh

Online Clients 0

	Username	IP	MAC	Up on	Action
No Data					

Table 3-12 PPPoE online user information

Parameter	Description
Username	Total number of online users that access the Internet through PPPoE dialing.
IP	IP address of the client.
MAC	MAC address of the client.

Parameter	Description
Up on	Time when the user accesses the Internet.

3.13 Port Mapping

3.13.1 Overview

1. Port Mapping

The port mapping function can establish a mapping relationship between the IP address and port number of a WAN port and the IP address and port number of a server in the LAN, so that all access traffic to a service port of the WAN port will be redirected to the corresponding port of the specified LAN server. This function enables external users to actively access the service host in the LAN through the IP address and port number of the specified WAN port.

Application scenario: Port mapping enables users to access the cameras or computers in their home network when they are in the enterprise or on a business trip.

2. NAT-DMZ

When an incoming data packet does not hit any port mapping entry, the packet is redirected to the LAN server according to the Demilitarized Zone (DMZ) rule. All data packets actively sent from the Internet to the device are forwarded to the designated DMZ host, thus realizing LAN server access of external network users. DMZ not only realizes the external network access service, but also ensures the security of other hosts in the LAN.

Application scenario: Configure port mapping or DMZ when an external network user wants to access the LAN server, for example, access a server deployed in the home network when the user is in the enterprise or on a business trip.

3.13.2 Getting Started

- Confirm the intranet IP address of the mapping device on the LAN and the port number used by the service.
- Confirm that the mapped service can be normally used on the LAN.

3.13.3 Configuration Steps

Choose **Local Device > Advanced > Port Mapping > Port Mapping**.

Click **Add**. In the dialog box that appears, enter the rule name, service type, protocol type, external port/range, internal server IP address, and internal port/range. You can create a maximum of 50 port mapping rules.

Port Mapping NAT-DMZ

Port Mapping ⓘ

Port Mapping List + Add Delete Selected

Up to 50 entries can be added.

<input type="checkbox"/>	Name	Protocol	External IP Address	External Port	Internal IP Address	Internal Port	Action
<input type="checkbox"/>	test	TCP	172.26.1.200	3389	192.168.110.236	80	Edit Delete

Add ×

* Name

Preferred Server

Protocol

External IP Address Outbound Interface
 Enter or select an IP address.

* External Port/Range

* Internal IP Address

* Internal Port/Range

Table 3-13 Port mapping configuration

Parameter	Description
Name	Enter the description of the port mapping rule, which is used to identify the rule.
Preferred Server	Select the type of service to be mapped, such as HTTP or FTP. The internal port number commonly used by the service is automatically entered. If you are not sure about the service type, select Custom .

Parameter	Description
Protocol	Select the transmission layer protocol type used by the service, such as TCP or UDP . The value ALL indicates that the rule applies to both protocols. The value must comply with the client configuration of the service.
External IP Address	Specify the host address used for accessing the external network. You can set it to the following: <ul style="list-style-type: none"> ● Outbound Interface: You can select All WAN Ports or specify a WAN port. ● Enter or select an IP address: Select or enter the IP address of a WAN port.
External Port/Range	Specify the port number used for Internet access. You need to confirm the port number in the client software, such as the camera monitoring software. You can enter a port number or a port range, such as 1050-1060. If you enter a port range, the value of Internal Port/Range must also be a port range.
Internal IP Address	Specify the IP address of the internal server to be mapped to the WAN port, that is, the IP address of the LAN device that provides Internet access, such as the IP address of the network camera.
Internal Port/Range	Specify the service port number of the internal server to be mapped to the WAN port, that is, the port number of the application that provides Internet access, such as port 8080 of the Web service. You can enter a port number or a port range, such as 1050-1060. If you enter a port range, the number of ports must be the same as that specified in External Port/Range .

3.13.4 Verification and Test

Check whether the external network device can access services on the destination host using the external IP address and external port number.

3.13.5 Solution to Test Failure

- (1) Modify the value of **External Port/Range** and use the new external port number to perform the test again. The possible cause is that the port is blocked by the firewall.
- (2) Enable the remote access permission on the server. The possible cause is that remote access is displayed on the server, resulting in normal internal access but abnormal access across network segments.
- (3) Configure DMZ rules. For details, see Section [3.13.6 Configuration Steps \(DMZ\)](#). The possible cause is that the specified ports are incorrect or incomplete.

3.13.6 Configuration Steps (DMZ)

Choose **Local Device** > **Advanced** > **Port Mapping** > **NAT-DMZ**.

Click **Add**. Enter the rule name and internal server IP address, select the interface to which the rule applies, specify the rule status, and click **OK**. You can configure only one DMZ rule for an outbound interface.

Port Mapping [NAT-DMZ](#)

NAT-DMZ ?
 You can view NAT-DMZ settings and edit or delete the rule.

NAT-DMZ Rule List + Add Delete Selected

There are **3** outbound interfaces. Up to **3** rules can be added.

	Name	Outbound Interface	Dest IP Address	Status	Action
<input type="checkbox"/>	test	WAN1	192.168.110.222	Enable ☺	Edit Delete

Add Rule ×

* Name

* Dest IP Address

Outbound Interface ▼

Status

Table 3-14 DMZ rule configuration

Parameter	Description
Name	Enter the description of the mapping rule, which is identify the DMZ rule.
Dest IP Address	Specify the IP address of the DMZ host to which packets are redirected, that is, the IP address of the internal server that can be accessed from the Internet.
Outbound Interface	Specify the WAN port in the DMZ rule. You can configure only one rule for a WAN port.
Status	Specify whether the rule is effective. The rule is effective after you turn on Status .

3.14 UPnP

3.14.1 Overview

After the Universal Plug and Play (UPnP) function is enabled, the device can change the port used by the Internet access service according to the client request, implementing NAT. When a client on the Internet wants to access the internal resources on the LAN device, the device can automatically add port mapping entries to

realize traversal of some services between internal and external networks. The following commonly used programs support the UPnP protocol: MSN Messenger, Thunder, BT, and PPLive.

Before you use the UPnP service, note that clients (PCs and mobile phones) used in combination also support UPnP.

Note

To implement automatic port mapping using UPnP, the following conditions must be met:

- UPnP is enabled on the device.
- The operating system of the LAN host supports UPnP and has UPnP enabled.
- The programs support UPnP and have UPnP enabled.

3.14.2 Configuring UPnP

Choose **Local Device > Advanced > UPnP Settings**.

Turn on Enable to enable the UPnP function. Select a port from the drop-down list box of **Default Interface**. Click **Save** to make the configuration take effect.

If any relevant program converts the port automatically, the information is displayed in the **UPnP List** section.



Table 3-15 UPnP configuration

Parameter	Description
Enable	Specify whether to enable UPnP. By default, UPnP is disabled.
Default Interface	Specify the WAN port address bound to the UPnP service. By default, the default interface is a WAN port. On the device with multiple WAN ports, you can manually select the WAN port to bind or set this parameter to Auto to allow the device to select a WAN port automatically.

3.14.3 Verifying Configuration

After the UPnP service is enabled, open a program that supports the UPnP protocol (such as Thunder or BitComet) on the client used with the device, and refresh the Web page on the device. If a UPnP entry is displayed in the UPnP list, a UPnP tunnel is created successfully.

3.15 DDNS

3.15.1 Overview

After the Dynamic Domain Name Server (DDNS) service is enabled, external users can use a fixed domain name to access service resources on the device over the Internet at any time, without the need to search for the WAN port IP address. You need to register an account and a domain name on the third-party DDNS service provider for this service. The device supports DDNS and No-IP DNS.

3.15.2 Getting Started

Before you use the DDNS service, register an account and a domain name on the DDNS or No-IP official website.

3.15.3 Configuring DDNS

1. Configuration Steps

The device supports Oray DDNS, No-IP DNS and DynDNS. Oray DDNS cannot be used by the International users, and No-IP DNS can be used by both Chinese and International users.

Choose **Local Device > Advanced > Dynamic DNS > No-IP DNS**.

Enter the registered username and password and click Log In to initiate a connection request to the server. The binding between the domain name and WAN port IP address of the device takes effect.

Click Delete to clear all the entered information and remove the server connection relationship.

The **Link Status** parameter specifies whether the server connection is established successfully. If you do not specify the domain name upon login, the domain name list of the current account is displayed after successful connection. All the domain names of this account are parsed to the WAN port IP address.

No-IP DNS DynDNS

No-IP DNS

* Service Interface WAN

* Username jjtrt Register

* Password

Domain rtrtrt

Log In Delete

Link Status Connecting... *

Table 3-16 DDNS login information

Parameter	Description
Service Interface	One domain name can be parsed to only one IP address. Therefore, you need to specify the WAN port bound to the domain name when multiple WAN ports are available. By default, the service interface is a WAN port.
Username & Password	Enter the username and password of the account registered on the official website. If no registered account is available, click Register to switch to the official website and create a new account.
Domain	Specify the domain name bound to the service interface IP address. This parameter is optional for No-IP DNS. One account can be bound to multiple domain names. You can choose to bind only one domain name to the IP address of the current service interface. Only the selected domain name is parsed to the WAN port IP address. If no domain name is specified, all the domain names of the current account are parsed to the WAN port IP address.

2. Verifying Configuration

If **Link Status** is displayed as **Connected**, the server connection is established successfully. After the configuration is completed, ping the domain name from the Internet. The ping succeeds and the domain name is parsed to the WAN port IP address.

3.16 Connecting to IPTV

Caution

To connect to IPTV in the Chinese environment, switch the system language. For details, see Section [9.11 Switching System Language](#).

IPTV is a network television service provided by the ISP.

3.16.1 Getting Started

- Confirm that the IPTV service is activated.
- Check the local IPTV type: VLAN or IGMP. If the type is VLAN, confirm the VLAN ID. If you cannot confirm the type or VLAN ID, contact the local ISP.

3.16.2 Configuration Steps (VLAN Type)

Choose **Local Device > Basics > IPTV > IPTV/VLAN**.

Select a proper mode based on your region, click the drop-down list box next to the interface to connect and select **IPTV**, and enter the VLAN ID provided by the ISP. For example, when you want to connect the IPTV set top box to LAN 3 port of the device and the VLAN ID is 20, the configuration UI is as follows.


Internet VLAN: If you need to set a VLAN ID for the Internet access service, turn on this parameter and enter the VLAN ID. By default, the VLAN tag function is disabled. You are advised to keep the VLAN tag function disabled unless otherwise specified.

After the configuration is completed, confirm that the IPTV set top box is connected to the correct port, for example, LAN 3 in the example.

 **Caution**

Enabling this function may lead to network disconnection. Exercise caution when performing this operation.

[IPTV/VLAN](#) [IPTV/IGMP](#)

 **IPTV/VLAN settings.**

IPTV/VLAN

* Mode

* LAN0

* LAN1/WAN3

* LAN2/WAN2

* LAN3/WAN1

* IPTV VLAN ID


Internet VLAN 802.1Q Tag

3.16.3 Configuration Steps (IGMP Type)

Choose **Local Device > Basics > IPTV > IPTV/IGMP**.

The IGMP type is applicable to the ISP FPT. After you enable IPTV connection, connect the IPTV set top box to any LAN port on the router.

IPTV/VLAN IPTV/IGMP

 **IPTV/IGMP (For FPT Service Provider)**

IPTV/IGMP

Enable

Save


3.17 Port Flow Control

 **Caution**

Only the RG-EG105G-E and RG-EG210G-E support this function.

Choose **Local Device > Advanced > Port Settings**.

When wired ports of the device work in different rates, data blocking may occur, leading to slow network speed. Enabling port flow control helps relieve the data congestion.

 **Port Flow Control**
Port flow control can relieve the data congestion caused by ports at different speeds and improve the network speed.

Enable



Save

3.18 Limiting the Number of Connections

Choose **Local Device > Advanced > Session Limit**.

This function is used to control the maximum number of connections per IP address.

Click **Add** to add an IP session limit rule.

 **IP Session Limit** 
Configure the max number of IP sessions.

Rule List

Up to **20** entries can be added.

<input type="checkbox"/>	Name	IP Range	Session Count Limit	Status	Action
No Data					

Table 3-17 IP session limit rule information

Parameter	Description
Name	Enter the name of the IP session limit rule.
Start	Enter the start IP address for session matching in the rule.
End IP Address	Enter the end IP address for session matching in the rule.
Session Count Limit	Specify the maximum number of session connections for an IP address matching the rule.
Status	Specify whether the rule is effective. The rule takes effect after you turn on this parameter.

3.19 Configuring Device Security

3.19.1 Overview

Prohibit Ping: This function identifies and directly discards the ping packets in the traffic sent to the device, so as to prohibit the ping operation on the device. Only admin IP addresses can ping through the device.


Admin IP Address: Admin IP addresses are exempt from the ping prohibition function. Packets sent from admin IP addresses can pass through and will not be discarded.

3.19.2 Enabling the Ping Prohibition Function

[Local Device] Choose **Security > Local Safety**.

The ping prohibition function includes the following:


- If you select **Prohibit LAN**, ping packets sent from all clients on the LAN to the device will be discarded.
- If you select **Prohibit WAN**, ping packets sent from all clients on the WANs to the device will be discarded. Ping packets sent from a client to the device will be responded only after the IP address of the client is contained in **Admin IP Address** list. For the configuration of admin IP addresses, see [Configuring an Admin IP Address](#).

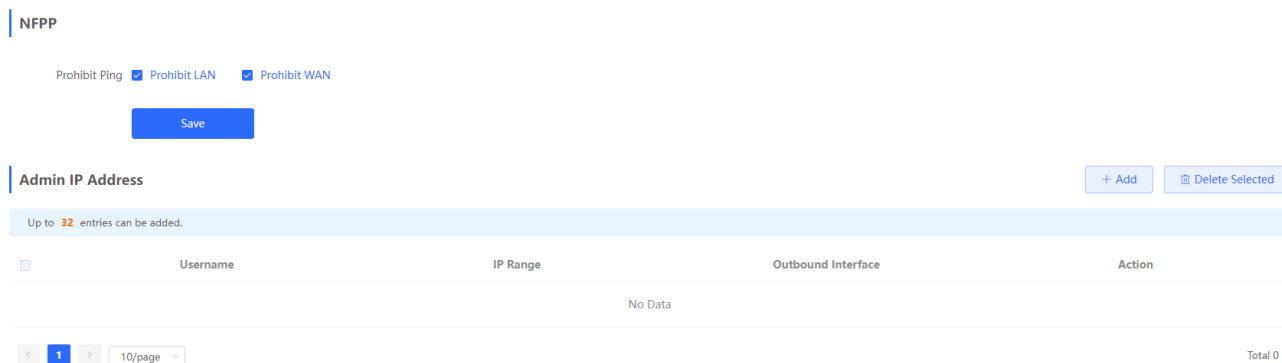

3.19.3 Configuring an Admin IP Address

[Local Device] Choose **Security > Local Safety**.

Click **Add**. Then, you can configure admin IP address information.

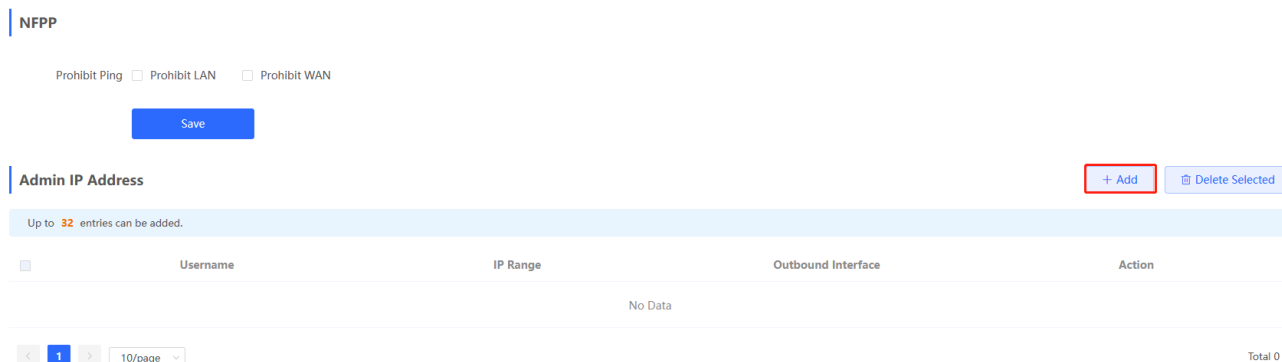

1. Configuring an Admin IP Address (Based on an IP Address)

Add
×

* Username

Specified Mode IP Range Outbound Interface

Please enter an IP address or range.

Cancel
OK

- (1) Configure a name for the admin IP address.
The name is a string of 1–32 characters.
- (2) Set **Specific Mode** to **IP Range**.
- (3) Configure an IP address.
You can specify a single IP address or an IP address range.

2. Configuring an Admin IP Address (Based on a Port)

Add ×

* Username

Specified Mode IP Range Outbound Interface

▼

- (1) Configure a name for the admin IP address.
The name is a string of 1–32 characters.
- (2) Set **Specific Mode** to **Outbound Interface**.
- (3) Specify the port.
You can select a LAN port or WAN port as the outbound interface.

3. Deleting an Admin IP Address

- Select an entry and click **Delete** to delete information about the admin IP address.
- Select multiple entries and click **Delete Selected** to bulk delete selected entries.

NFPP

Prohibit Ping Prohibit LAN Prohibit WAN

Admin IP Address + Add Delete Selected

Up to 32 entries can be added.

	Username	IP Range	Outbound Interface	Action
<input checked="" type="checkbox"/>	11111	192.168.110.1		Edit Delete
<input checked="" type="checkbox"/>	22222	192.168.110.2-192.168.110.100		Edit Delete
<input checked="" type="checkbox"/>	33333		Default VLAN	Edit Delete

Total 3

4. Editing Information About an Admin IP Address

You cannot modify the name and specified mode of an admin IP address but modify the IP address range or port in the specified mode.

Edit ×

* Username

Specified Mode IP Range Outbound Interface

Edit ×

* Username

Specified Mode IP Range Outbound Interface

3.20 Configuring TTL Rules

3.20.1 Overview

Time to live (TTL) aims to prevent unauthorized connections. It limits the number of devices that can transmit data packets in the network by limiting the existence time of the data packets in the computer network, so as to prevent infinite transmission of data packets in the network and the waste of resources.

When TTL is set to 1 and is valid for LANs, packets are directly discarded when passing through the next router. If a user connects a router to Ruijie device without permission and connects a client to the router, packets cannot pass through the client, either. This restriction prevents users from connecting routers without permission.


Note

- Changing the TTL affects packet forwarding on the network.
 - The following data packets are not affected by this function: data packets forwarded by the express forwarding function of the device, data packets used by Wi-Fi cracking software (Cheetah Wi-Fi) to implement hotspot sharing, data packets forwarded at L2, and data packets passing through devices with TTL changed.
-

3.20.2 Configuring TTL Rules

[Local Device] Choose **Advanced > TTL Rule**.

This operation allows you to change the TTL value in packets forwarded to a specified IP address range or a specified port.

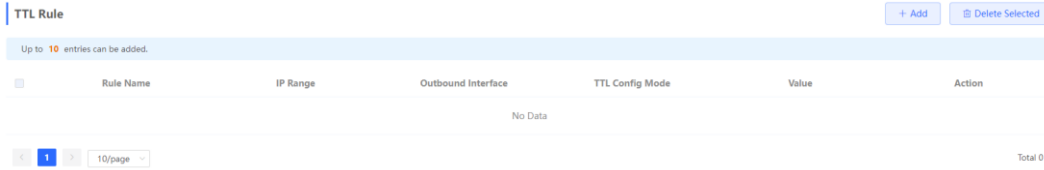

1. Configuring a TTL Rule

Add
×

* Rule Name

Specified Mode IP Range Outbound Interface

Please enter an IP address or range.

TTL Config Mode TTL Value TTL Increment
 TTL Decrement


* Value

Table 3-18 Description of TTL Rule Configuration

Parameter	Description
Rule Name	Specify the name of a TTL rule.
Specified Mode	Specify the range for the rule to take effect: <ul style="list-style-type: none"> ● IP Range: Indicates that the TTL rule takes effect on a specified IP address range. ● Outbound Interface: Indicates that the TTL rule takes effect on a specified outbound interface.
TTL Config Mode	Configure a rule for TTL values in packets. <ul style="list-style-type: none"> ● TTL Value: Specifies the value, to which the TTL value is changed, after a data packet passes through the device. ● TTL Increment: Specifies the increment of the TTL value on the basis of the original value after a data packet passes through the device. ● TTL Decrement: Specifies the decrement of the TTL value on the basis of the original value after a data packet passes through the device.
Value	Configure the TTL value in packets. The value range is from 1 to 255.


2. Deleting a TTL Rule

- Click **Delete** to delete the configuration of a specified entry.
- Select multiple entries and click **Delete Selected** to bulk delete selected entries.

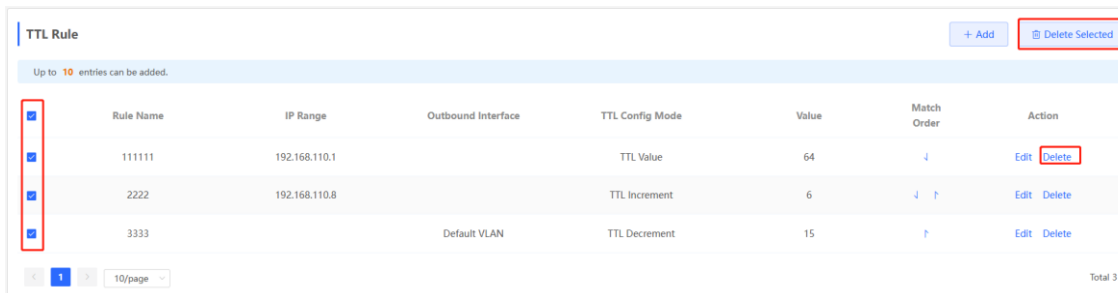


3. Editing a TTL Rule

Click **Edit**. Change the TTL rule configuration mode and TTL value.

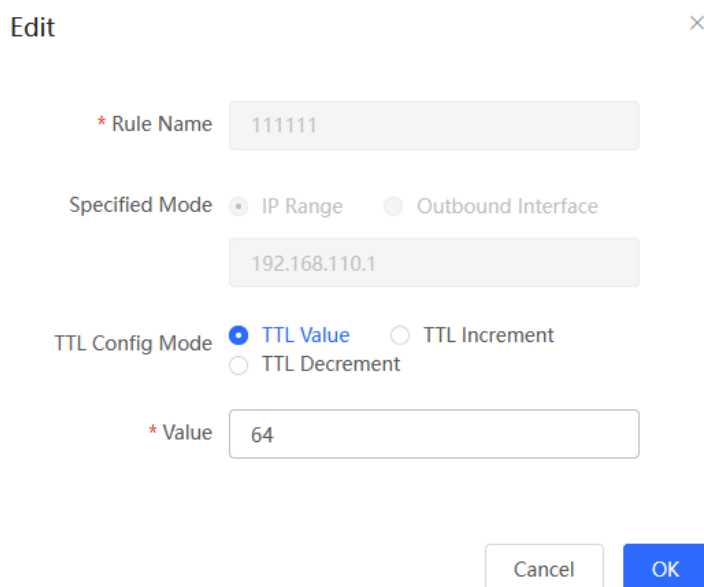

4. Adjusting the Sequence of TTL Rules

After configuring multiple TTL rules, you can adjust their sequence to specify the rule matching sequence. TTL rules in front rows are matched first, and those in back rows are matched later. If the ranges of rules overlap, the final effect is the superposition of multiple matching results.

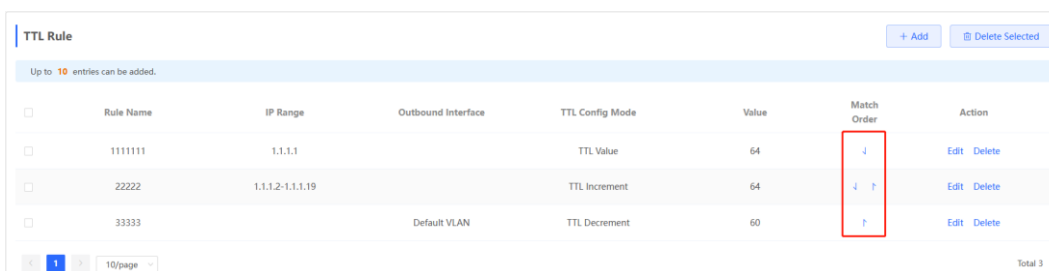

3.21 Other Settings

Choose **Local Device** > **Advanced** > **Other Settings**.

You can set some functions not frequently used on the Other Settings page. By default, all the functions on this page are disabled.

Enable RIP&RIPng: After this function is enabled, LAN and WAN ports support dynamic routing protocols Routing Information Protocol (RIP) and RIP next generation (RIPng) and can automatically synchronize route information from other RIP-enabled routers in the network.

Enable Advanced Firewall: After this function is enabled, enhanced attack defense and packet protocol check will degrade the forwarding performance of the device.

Enable SIP ALG: Some voice communication uses the Session Initiation Protocol (SIP) protocol. If the server is connected to a WAN port, SIP packets may become unavailable after NAT. After you enable this function, SIP packets are converted by the application-level gateway (ALG). You can enable or disable this function based on actual needs.

Disable ICMPv6 Error Messages: In normal cases, when the device receives an ICMPv6 anomaly packet, it sends an ICMPv6 error packet to the packet source. If you do not want the device to send these packets due to security considerations, enable this function.

i Other Settings

Enable RIP&RIPng

Enable Advanced ?
Firewall

Enable SIP ALG

Disable ICMPv6 Error
Messages

Save

4 AP Management

Note

- To manage the downlink AP, please enable self-organizing network discovery (See Section [3.1 Switching the Work Mode](#) for details.). The wireless settings are synchronized to all wireless devices in the network by default. You can configure groups to limit the device scope under wireless management. For details, see [4.1 AP Management](#).
- The device does not emit the Wi-Fi signals. Deliver the wireless settings to the downlink AP to take effect.

4.1 Configuring AP Groups

4.1.1 Overview

After self-organizing network discovery is enabled, the device can function as the master AP/AC to batch configure and manage its downlink APs by group. Before you configure the APs, divide them to different groups.


Note

If you specify groups when configuring the wireless network, the configuration takes effect on wireless devices in the specified groups.

4.1.2 Configuration Steps

Choose **Network > Devices > AP**.

- (1) View the information of all APs in the current network, including the basic information, RF information, and model. Click the SN of an AP to configure the AP separately.

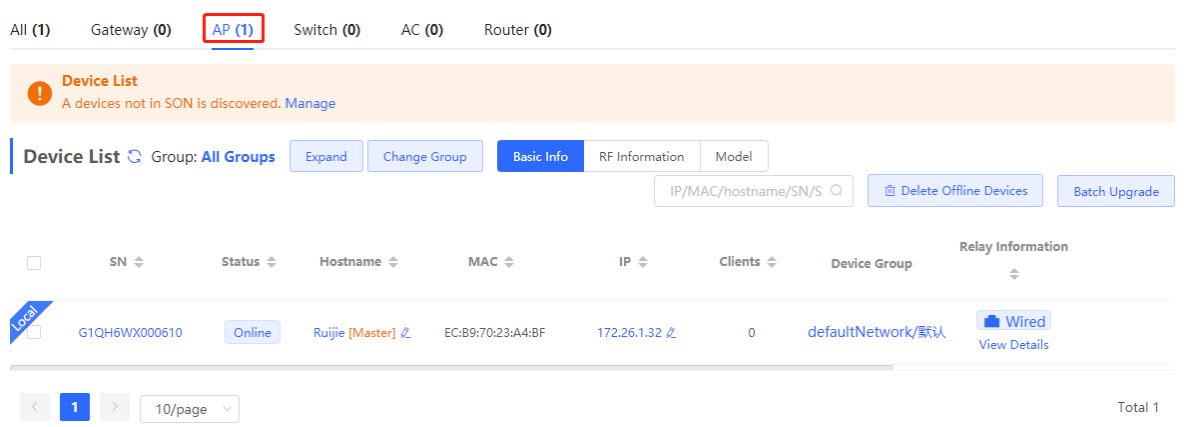

All (1) Gateway (0) **AP (1)** Switch (0) AC (0) Router (0)




Device List
A devices not in SON is discovered. [Manage](#)



Device List Group: All Groups [Expand](#) [Change Group](#) [Basic Info](#) [RF Information](#) [Model](#)

IP/MAC/hostname/SN/S [Delete Offline Devices](#) [Batch Upgrade](#)



<input type="checkbox"/>	SN	Status	Hostname	MAC	IP	Clients	Device Group	Relay Information
<input type="checkbox"/>	G1QH6WX000610	Online	Ruijie [Master]	EC:B9:70:23:A4:BF	172.26.1.32	0	defaultNetwork/默认	Wired View Details

< 1 > 10/page Total 1

- (2) Click **Expand**. Information of all the current groups is displayed to the left of the list. Click  to create a group. You can create a maximum of eight groups. Select the target group and click  to modify the group name or click  to delete the group. You cannot modify the name of the default group or delete the default group.

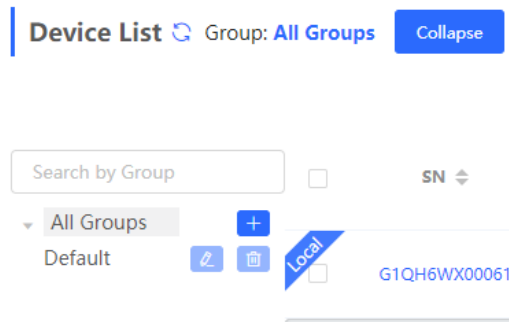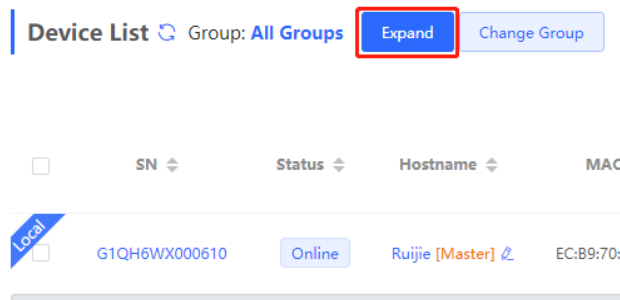

- Click a group name in the left. All devices in the group are displayed. One device can belong to only one group. By default, all devices belong to the default group. Select a record in the device list and click **Change Group** to migrate the selected device to the specified group. After a device is moved to the specified group, the device will use the configuration for the new group. Click **Delete Offline Devices** to remove offline devices from the list.

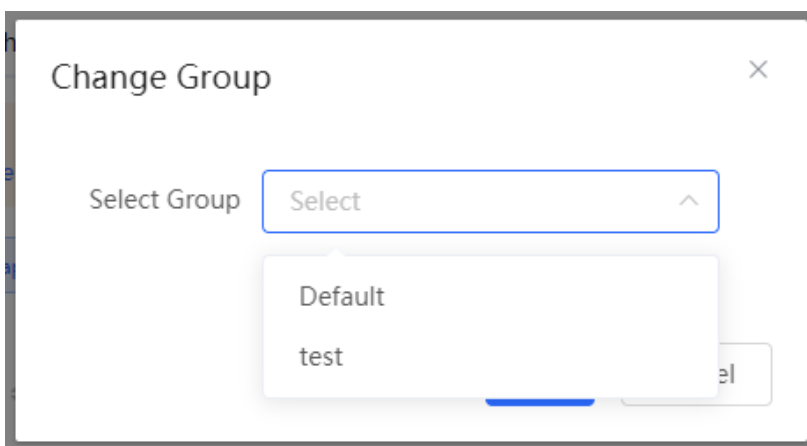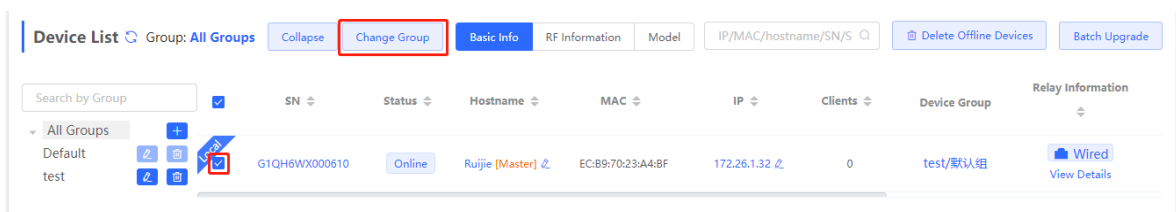


4.2 Configuring Wi-Fi


Choose **Network > Wi-Fi > Wi-Fi Settings**.

Enter the SSID and Wi-Fi password, select the frequency band used by the Wi-Fi signal, and click **Save**.

Click **Advanced Settings** to configure more Wi-Fi parameters.


 **Caution**

Modification will cause restart of the wireless configuration, resulting in logout of connected clients. Exercise caution when performing this operation.

 Tip: Changing configuration requires a reboot and clients will be reconnected.


Wi-Fi Settings Device Group: Default 

* SSID

Band 2.4G + 5G 

Security Open 

[Collapse](#)

Wireless Schedule All Time 

VLAN Default VLAN 

Hide SSID (The SSID is hidden and must be manually entered.)

Client Isolation Prevent wireless clients of this Wi-Fi from communicating with one another.

Band Steering (The 5G-supported client will access 5G radio preferentially.)

XPress (The client will experience faster speed.)

Layer-3 Roaming (The client will keep his IP address unchanged in this Wi-Fi network.)

Wi-Fi6 (802.11ax High-Speed Wireless Connectivity.) 

Table 4-1 Wireless network configuration

Parameter	Description
SSID	Enter the name displayed when a wireless client searches for a wireless network.
SSID Encoding	If the SSID does not contain Chinese, this item will be hidden. If the SSID contains Chinese, this item will be displayed. You can select UTF-8 or GBK.

Parameter	Description
Band	Set the band used by the Wi-Fi signal. The options are 2.4 GHz and 5 GHz. The 5 GHz band provides faster network transmission rate and less interference than the 2.4 GHz band, but is inferior to the 2.4 GHz band in terms of signal coverage range and wall penetration performance. Select a proper band based on actual needs. The default value is 2.4G + 5G , indicating that the device provides signals at both 2.4 GHz and 5 GHz bands.
Security	Select an encryption mode for the wireless network connection. The options are as follows: Open: The device can associate with Wi-Fi without a password. WPA-PSK/WPA2-PSK: Wi-Fi Protected Access (WPA) or WPA2 is used for encryption. WPA_WPA2-PSK (recommended): WPA2-PSK or WPA-PSK is used for encryption.
Wi-Fi Password	Specify the password for connection to the wireless network. The password is a string of 8 to 16 characters.
Wireless Schedule	Specify the time periods during which Wi-Fi is enabled. After you set this parameter, users cannot connect to Wi-Fi in other periods.
VLAN	Set the VLAN to which the Wi-Fi signal belongs. You can choose from the available VLANs or click Add New VLAN , and go to the LAN Settings page to add a VLAN.
Hide SSID	Enabling the hide SSID function can prevent unauthorized user access to Wi-Fi, improving security. However, mobile phones or computers cannot find the SSID after this function is enabled. You must manually enter the correct name and password to connect to Wi-Fi. Record the current SSID before you enable this function.
Client Isolation	After you enable this parameter, clients associated with the Wi-Fi are isolated from one other, and end users connected to the same AP (in the same network segment) cannot access each other. This improves security.
Band Steering	After this function is enabled, 5G-capable clients select 5G Wi-Fi preferentially. You can enable this function only when Band is set to 2.4G + 5G .
XPress	After this function is enabled, the device sends game packets preferentially, providing more stable wireless network for games.

Parameter	Description
Layer-3 Roaming	After this function is enabled, clients keep their IP addresses unchanged when associating with the same Wi-Fi. This function improves the roaming experience of users in the cross-VLAN scenario.
Wi-Fi6	After this function is enabled, wireless users can have faster network access speed and optimized network access experience. This function is valid only on APs and routers supporting 802.11ax. Clients must also support 802.11ax to experience high-speed network access empowered by Wi-Fi 6. If clients do not support Wi-Fi 6, disable this function.


4.3 Configuring Guest Wi-Fi

Choose **Network > Wi-Fi > Guest Wi-Fi**.

Guest Wi-Fi is a wireless network provided for guests, and is disabled by default. **Client Isolation** is enabled for guest Wi-Fi by default, and it cannot be disabled. In this case, users associating with guest Wi-Fi are mutually isolated, and they can only access the Internet through Wi-Fi. This improves network access security. You can configure a wireless schedule for the guest network. After the specified schedule expires, the guest network will become unreachable.

Turn on the guest Wi-Fi and set the guest SSID and password. Click **Advanced Settings** to configure the wireless schedule of the guest Wi-Fi and more Wi-Fi parameters (For details, see [Section 4.2 Configuring Wi-Fi](#)). Click **Save**. Guests can access the Internet through Wi-Fi after entering the SSID and password.

Wi-Fi Settings **Guest Wi-Fi** Wi-Fi List Healthy Mode Load Balancing

 Tip: Changing configuration requires a reboot and clients will be reconnected.

Guest Wi-Fi Device Group:

Enable

* SSID

Band

Security

..... Collapse

Wireless Schedule

VLAN

Hide SSID (The SSID is hidden and must be manually entered.)

Client Isolation Prevent wireless clients of this Wi-Fi from communicating with one another.

Band Steering (The 5G-supported client will access 5G radio preferentially.)

XPress (The client will experience faster speed.)

Layer-3 Roaming (The client will keep his IP address unchanged in this Wi-Fi network.)

Wi-Fi6 (802.11ax High-Speed Wireless Connectivity.) ?

4.4 Adding a Wi-Fi

Choose **Network > Wi-Fi > Wi-Fi List**.

Click **Add**, enter the SSID and password, and click **OK** to create a Wi-Fi. Click **Advanced Settings** to configure more Wi-Fi parameters. For details, see Section [4.2 Configuring Wi-Fi](#). After a Wi-Fi is added, clients can find this Wi-Fi, and the Wi-Fi information is displayed in the Wi-Fi list.

Wi-Fi Settings Guest Wi-Fi Wi-Fi List Healthy Mode Load Balancing

i Tip: Changing configuration requires a reboot and clients will be reconnected. ?

Wi-Fi List Device Group: + Add

Up to 8 SSIDs can be added.

SSID	Band	Security	Hidden	VLAN ID	Action
test	2.4G + 5G	OPEN	No	Default VLAN	Edit Delete

Add ✕

i The configuration will take effect after being delivered to AP.

* SSID

Band

Security

* Wi-Fi Password

----- Expand -----

4.5 Healthy Mode

Choose **Network > Wi-Fi > Healthy Mode**.

Turn on healthy mode and select a wireless schedule for the mode.

After the healthy mode is enabled, the RF transmit power and Wi-Fi coverage range of the device are reduced in the schedule. This may lead to weak signals and network freezing. You are advised to disable healthy mode or set the wireless schedule to the idle periods.

Wi-Fi Settings Guest Wi-Fi Wi-Fi List Healthy Mode Load Balancing

i Enable healthy mode, and the device will decrease its transmit power to reduce radiation.
Tip: Changing configuration requires a reboot and clients will be reconnected.

Healthy Mode Device Group:

Enable

Wireless Schedule

4.6 RF Settings

Choose **Network > Radio Frequency**.

The device can detect the surrounding wireless environment upon power-on and select proper configuration. However, network freezing caused by wireless environment changes cannot be prevented. You can analyze the wireless environment around the APs and routers and manually select proper parameters.

⚠ Caution

Modification will cause restart of the wireless configuration, resulting in logout of connected clients. Exercise caution when performing this operation.

i Tip: Changing configuration requires a reboot and clients will be reconnected.

Radio Frequency Device Group: Default

Country/Region China (CN)

2.4G Channel Width Auto 5G Channel Width Auto

Client Count Limit 64 Client Count Limit 128

Kick-off Threshold Disable -75dBm -50dBm Kick-off Threshold Disable -75dBm -50dBm

The settings are valid for only **current device**

2.4G Channel Auto 5G Channel Auto

Transmit Power Auto Lower Low Medium High Transmit Power Auto Lower Low Medium High

Roaming Sensitivity Low 20% 40% 60% 80% High Roaming Sensitivity Low 20% 40% 60% 80% High

Save

Table 4-2 RF configuration

Parameter	Description
Country/Region	The Wi-Fi channels stipulated by each country may be different. To ensure that clients can find the Wi-Fi signal, select the country or region where the device is located.
2.4G/5G Channel Width	A lower bandwidth indicates more stable network, and a higher bandwidth indicates easier interference. In case of severe interference, select a relatively low bandwidth to prevent network freezing to certain extent. The 2.4 GHz band supports the 20 MHz and 40 MHz bandwidths. The 5 GHz band supports the 20 MHz, 40 MHz, and 80 MHz bandwidths. By default, the value is Auto , indicating that the bandwidth is selected automatically based on the environment.

Parameter	Description
Client Count Limit	<p>If a large number of users access the AP or router, the wireless network performance of the AP or router may be degraded, affecting users' Internet access experience. After you set this parameter, new user access is prohibited when the number of access users reaches the specified value. If the clients require high bandwidth, you can adjust this parameter to a smaller value. You are advised to keep the default value unless otherwise specified.</p>
Kick-off Threshold	<p>When multiple Wi-Fi signals are available, you can set this parameter to optimize the wireless signal quality to some extent. When a client is far away from the wireless device, the Wi-Fi connection is disconnected when the wireless signal strength of the end user is lower than the kick-off threshold. In this case, the client has to select a nearer wireless signal.</p> <p>The client is prone to be kicked off if the kick-off threshold is high. To ensure that the client can normally access the Internet, you are advised to set this parameter to Disable or a value smaller than -75 dBm.</p>

 **Note**

- Wireless channels available for your selection are determined by the country/region code. Select the country/region code based on the country or region of your device.
 - Channel, transmit power, and roaming sensitivity cannot be set globally. Please perform the configurations on the devices separately.
-

4.7 Configuring Wi-Fi Blacklist or Whitelist

4.7.1 Overview

You can configure the global or SSID-based blacklist and whitelist. The MAC address supports full match and OUI match.

Wi-Fi blacklist: Clients in the Wi-Fi blacklist are prevented from accessing the Internet. Clients that are not added to the Wi-Fi blacklist are free to access the Internet.

Wi-Fi whitelist: Only clients in the Wi-Fi whitelist can access the Internet. Clients that are not added to the Wi-Fi whitelist are prevented from accessing the Internet.

 **Caution**

If the whitelist is empty, the whitelist does not take effect. In this case, all clients are allowed to access the Internet.

4.7.2 Configuring a Global Blacklist/Whitelist

In **Network** mode, choose **Clients > Blacklist/Whitelist > Global Blacklist/Whitelist**.

Select the blacklist or whitelist mode and click **Add** to configure a blacklist or whitelist client. In the **Add** dialog box, enter the MAC address and remark of the target client and click **OK**. If a client is already associated with the router, its MAC address will pop up automatically. Click the MAC address directly for automatic input. All clients in the blacklist will be forced offline and not allowed to access the Wi-Fi network. The global blacklist and whitelist settings take effect on all Wi-Fi networks of the router.

Global Blacklist/Whitelist
SSID-Based Blacklist/Whitelist

All STAs except blacklisted STAs are allowed to access Wi-Fi.

Only the whitelisted STAs are allowed to access Wi-Fi.

Blocked WLAN Clients + Add Delete Selected

Up to 64 members can be added.

	MAC	Remark	Action
<input type="checkbox"/>	AE:4E:11 OUI		Edit Delete
<input type="checkbox"/>	11:22:33:44:55:66		Edit Delete

Add ×

Match Type Full Prefix (OUI)

* MAC

Remark

If you delete a client from the blacklist, the client will be allowed to connect to the Wi-Fi network. If you delete a client from the whitelist, the client will be forced offline and denied access to the Wi-Fi network.

All STAs except blacklisted STAs are allowed to access Wi-Fi. Only the whitelisted STAs are allowed to access Wi-Fi.

Blocked WLAN Clients


Up to **64** members can be added.

<input type="checkbox"/>	MAC	Remark	Action
<input type="checkbox"/>	AE:4E:11 OUI		Edit Delete
<input type="checkbox"/>	11:22:33:44:55:66		Edit Delete

4.7.3 Configuring an SSID-based Blacklist/Whitelist

In **Network** mode, choose  **Clients** > **Blacklist/Whitelist** > **SSID-Based Blacklist/Whitelist**.

Select a target Wi-Fi network from the left column, select the blacklist or whitelist mode, and click **Add** to configure a blacklist or whitelist client. The SSID-based blacklist and whitelist will restrict the client access to the specified Wi-Fi.

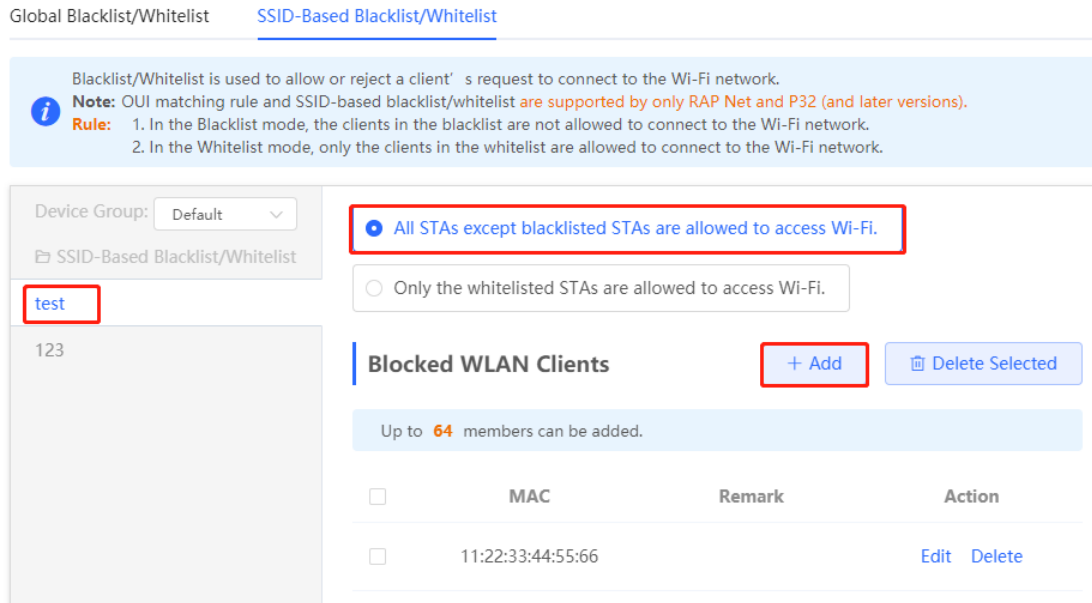

4.8 Configuring AP Load Balancing

4.8.1 Overview

The AP load balancing function is used to balance the load of APs in the wireless network. When APs are added to a load balancing group, clients will automatically associate with the APs with light load when the APs in the group are not load balanced. AP load balancing supports two modes:

- **Client Load Balancing:** The load is balanced according to the number of associated clients. When a large number of clients have been associated with an AP and the count difference to the AP with the lightest load has reached the specified value, the client can only associate with another AP in the group.
- **Traffic Load Balancing:** The load is balanced according to the traffic on the APs. When the traffic on an AP is large and the traffic difference to the AP with the lightest load has reached the specified value, the client can only associate with another AP in the group.

Example: Add AP1 and AP2 into a group and select client load balancing. Set both the client count threshold and difference to 3. AP1 is associated with 5 clients and AP2 is associated with 2 clients, triggering load balancing. New clients' attempt to associate to AP1 will be denied, and therefore they can associate only with AP2.

After a client request is denied by an AP and it fails to associate with another AP in the group, the client will keep trying to associate with this AP. If the client attempts reach the specified value, the AP will permit connection of this client, ensuring that the user can normally access the Internet.

4.8.2 Configuring Client Load Balancing

Choose **Network > Wi-Fi > Load Balancing**.

Click **Add**. In the dialog box that appears, set **Type** to **Client Load Balancing**, and configure **Group Name**, **Members**, and **Rule**.

Load Balancing

+ Add

Delete Selected

Up to **32** entries can be added.
 Add APs in an area into a group and enable load balancing. When load is unbalanced in the group, clients will automatically associate to an AP with lighter load.
 Example: Add AP1 and AP2 into a group and select client load balancing. Set both the client count threshold and difference to 3. AP1 is associated with 5 clients and AP2 is associated with 2 clients, triggering load balancing. New clients' attempt to associate to AP1 will be denied, and therefore they can associate only to AP2.


<input type="checkbox"/>	Group Name	Type	Rule	Members	Action
No Data					

Add

×

* Group Name

* Type

* Rule  clients and the difference between the currently associated client count and client count on the AP with the lightest load reaches , clients can associate only to another AP in the group. After a client association is denied by an AP for times, the client will be allowed to associate to the AP upon the next attempt.

* Members

Cancel

Table 4-3 Client load balancing configuration

Parameter	Description
Group Name	Enter the name of the AP load balancing group.
Type	Select Client Load Balancing .

Parameter	Description
Rule	<p>Configure a detailed load balancing rule, including the maximum number of clients allowed to associate with an AP, the difference between the currently associated client count and client count on the AP with the lightest load, and the number of attempts to the AP with full load.</p> <p>By default, when an AP is associated with 3 clients and the difference between the currently associated client count and client count on the AP with the lightest load reaches 3, clients can associate only to another AP in the group. After a client association is denied by an AP for 10 times, the client will be allowed to associate to the AP upon the next attempt.</p>
Members	Specify the APs to be added to the AP load balancing group.

4.8.3 Configuring Traffic Load Balancing

Choose **Network > Wi-Fi > Load Balancing**.

Click **Add**. In the dialog box that appears, set **Type** to **Traffic Load Balancing**, and configure **Group Name**, **Members**, and **Rule**.

Wi-Fi Settings Guest Wi-Fi Wi-Fi List Healthy Mode Load Balancing

Load Balancing + Add Delete Selected

Up to **32** entries can be added.
 Add APs in an area into a group and enable load balancing. When load is unbalanced in the group, clients will automatically associate to an AP with lighter load.
 Example: Add AP1 and AP2 into a group and select client load balancing. Set both the client count threshold and difference to 3. AP1 is associated with 5 clients and AP2 is associated with 2 clients, triggering load balancing. New clients' attempt to associate to AP1 will be denied, and therefore they can associate only to AP2.

<input type="checkbox"/>	Group Name	Type	Rule	Members	Action
No Data					

Add
×

* Group Name

* Type Traffic Load Balancing ▼

* Rule

When the traffic load on an AP reaches *100Kbps and the difference between the current traffic and the traffic on the AP with the lightest load reaches *100Kbps, clients can associate only to another AP in the group. After a client association is denied by an AP for times, the client will be allowed to associate to the AP upon the next attempt.

* Members Enter an AP name or SN. ▼

Cancel
OK

Table 4-4 Traffic load balancing configuration

Parameter	Description
Group Name	Enter the name of the AP load balancing group.
Type	Select Traffic Load Balancing .
Rule	<p>Configure a detailed load balancing rule, including the maximum traffic allowed on an AP, the difference between the current traffic and the traffic on the AP with the lightest load, and the number of attempts to the AP with full load.</p> <p>By default, when the traffic load on an AP reaches 500 Kbit/s and the difference between the current traffic and the traffic on the AP with the lightest load reaches 500 Kbit/s, clients can associate only to another AP in the group. After a client association is denied by an AP for 10 times, the client will be allowed to associate to the AP upon the next attempt.</p>
Members	Specify the APs to be added to the AP load balancing group.

4.9 Wireless Network Optimization

4.9.1 Wireless Network Optimization with One Click

Choose **Network** > **WIO**.

On the **Network Optimization** tab, select **I have read the notes** and click **Network Optimization** to perform automatic wireless network optimization in the networking environment. You can configure scheduled optimization to optimize the network at the specified time. You are advised to set the scheduled optimization time to daybreak or the idle periods.

⚠ Caution

Clients may be kicked offline during optimization and the configuration cannot be rolled back after optimization starts. Exercise caution when performing this operation.

Network Optimization
Optimization Record

☑
Start

🔍
 Scanning

🚀
 Optimizing

☑
Finish

Description:

This feature will optimize the self-organizing network to maximize the WLAN performance. Please make sure that all APs have been online.

Notes:

1. During network optimization, the APs will switch channels, forcing the clients to go offline. The process will last for a while, subject to the quantity of devices. It is recommended you enable network optimization at night.
2. If dynamic channel allocation is running in the backend, network optimization will fail. Please try again later.
3. The configuration cannot be rolled back once optimization starts.

I have read the notes.

Network Optimization

Scheduled Optimization

i Scheduled Optimization
 Optimize the network performance at a scheduled time for a better user experience.

Enable

Day Sun


Time 03 : 00

Save

After optimization starts, please wait patiently until optimization is complete. After optimization ends, click **Cancel Optimization** to restore optimized RF parameters to default values.

Click **View Details** or the **Optimization Record** tab to view the latest optimization record details.

Start
Scanning
Optimizing
Finish



Finish

Optimization finished on 2022-04-26 15:26:22

Time: 31 seconds

View Details
Back
Cancel Optimization

Network Optimization
Optimization Record

i Last Optimized: 2022-04-26 15:26:22
You have optimized 1 APs and improved the performance by 12.50%!

Overview

Details

Hostname	Band	SN	Channel (Before/After)	Channel Width (Before/After)	Transmit Power (Before/After)	Sensitivity (Before/After)	CCI (Before/After)	ACI (Before/After)	Interference (Before/After)
Ruijie	2.4G	G1QH6WX000 610	1	20	auto/100	80/0	0	0	0
Ruijie	5G	G1QH6WX000 610	36	80	auto/100	78/0	0	0	0

4.9.2 Wi-Fi Roaming Optimization (802.11k/v)

Wi-Fi roaming is further optimized through the 802.11k/802.11v protocol. Smart endpoints compliant with IEEE 802.11k/v can switch association to the access points with better signal and faster speed, thereby ensuring high-speed wireless connectivity.

To ensure high quality of smart roaming service, the WLAN environment will be automatically scanned when Wi-Fi roaming optimization is first enabled.

Choose **Network > WIO > Wi-Fi Roaming Optimization (802.11k/v)**.

Network Optimization
Optimization Record
Wi-Fi Roaming Optimization (802.11k/v)

Start
Scanning
Optimizing
Finish

Description:
The Wi-Fi roaming is further optimized through the 802.11k/v protocol. Smart clients compliant with 802.11k/v can switch to the APs with better signal and faster speed during the roaming process, ensuring high-speed wireless connectivity. To ensure smart roaming effect, the WLAN environment will be auto scanned when Wi-Fi roaming optimization is first enabled.

Notes:
During the WLAN environment scanning, the APs will switch channels, forcing the clients to go offline. The process will last for 2 minutes.

Enable


⚠ **Caution**

During the optimization, the clients may be forced offline. Please proceed with caution.

Click **Enable** and the optimization starts.

Network Optimization Optimization Record **Wi-Fi Roaming Optimization (802.11k/v)**

Start Scanning Optimizing Finish

 **Optimizing...**

Optimization started on 2022-10-08 13:53:53
To ensure smart roaming effect, please [Click Here](#) to scan the WLAN environment again if the topology changes.

4.10 Wi-Fi Authentication

4.10.1 Overview

With the popularity of wireless networks, Wi-Fi has become one of the marketing means for merchants. Customers can connect to the Wi-Fi provided by the merchants to surf the Internet after watching advertisements or following the WeChat official accounts. In addition, to defend against security vulnerabilities, the wireless office network usually allows only employees to associate with Wi-Fi, so the identity of the clients needs to be verified.

The Wi-Fi authentication function of the device uses the Portal authentication technology to implement information display and user management. After users connect to Wi-Fi, the traffic will not be directly routed to the Internet. Wi-Fi users must pass authentication on the Portal authentication website, and only authenticated users are allowed to use network resources. Merchants or enterprises can customize Portal pages for identity authentication and advertisement display.

4.10.2 Getting Started

- (1) Before you enable Wi-Fi authentication, ensure that the wireless signal is stable and users can connect to Wi-Fi and surf the Internet normally. The wireless SSID used for authentication in the network should be set to the open state. Encryption may lead to exceptions during Connect Wi-Fi via WeChat authentication.
- (2) If the IP address of an AP in the network is within the authentication scope, add the AP as the authentication-free user. For details, see Section [4.10.9 Authentication-Free](#).
 - o In a Layer 2 network, add the MAC address of the AP to the authentication-free MAC address whitelist.
 - o In a Layer 3 network, add the IP address of the AP to the authentication-free IP address whitelist.

4.10.3 WeChat Authentication

1. Overview

The EG device is connected to the MACC authentication server on the cloud. After Wi-Fi users connect to Wi-Fi, a Portal page pops up. The users need to jump to WeChat and follow the WeChat official account before they can access the Internet. WeChat authentication is applicable to the shopping mall scenario, where merchants guide customers to follow their WeChat official accounts through WeChat authentication.

2. Getting Started

- (1) Connect Wi-Fi via WeChat is a Layer 2 protocol. Ensure that the authentication device can obtain the MAC addresses of the wireless users.

- o The gateway address of the wireless users to be authenticated is deployed on the authentication device.
 - o If the gateway address is not deployed on the authentication device, the device functions as a DHCP server to allocate IP addresses to the wireless users and obtain MAC addresses of the wireless users. In this scenario, you need to set Network Type to Layer-3 Network.
- (2) Complete the corresponding configuration on the WeChat Official Account platform and NOC MACC platform before you enable the authentication function on the device. Ruijie Cloud supports voucher authentication, local account authentication, SMS authentication, and one-click authentication. Please log into Ruijie Cloud to enable authentication.

[Cloud Auth](#) Local Account Auth Authorized Auth QR Code Auth Whitelist Online Clients

Ruijie Cloud supports voucher authentication, local account authentication, SMS authentication and one-click authentication. Please log into Ruijie Cloud to enable authentication. [View](#)

i In a layer-2 network, if the IP address of the EAP device is in the authentication IP range, please add its MAC address to the MAC address whitelist of [Whitelist](#). ?

In a layer-3 network, if the IP address of the EAP device is in the authentication IP range, please add its IP address to the IP address whitelist of [Whitelist](#).

3. Configuration Steps

Choose **Local Device > Advanced > Authentication > Cloud Auth**.

- (1) Enable WeChat authentication for Internet access.

Turn on **Authentication**, set **Server Type** to **Connect Wi-Fi via WeChat**, configure **Network Type**, **Auth Server URL**, **Redirect IP**, and **Client Escape**, and click **Save**.

[Cloud Auth](#) Local Account Auth Authorized Auth QR Code Auth Whitelist Online Clients

Ruijie Cloud supports voucher authentication, local account authentication, SMS authentication and one-click authentication. Please log into Ruijie Cloud to enable authentication. [View](#)

i In a layer-2 network, if the IP address of the EAP device is in the authentication IP range, please add its MAC address to the MAC address whitelist of [Whitelist](#). ?

In a layer-3 network, if the IP address of the EAP device is in the authentication IP range, please add its IP address to the IP address whitelist of [Whitelist](#).

Authentication

* Network Type

* Server Type

* Auth Server URL

Redirect IP

Client Escape Enable

[Save](#)

Table 4-5 WeChat authentication configuration

Parameter	Description
Network Type	The default value is Layer-2 Network . Select a network type based on the actual network environment. As Connect Wi-Fi via WeChat is a Layer 2 protocol, in a Layer 3 network environment, you need to connect downlink devices to the current authentication device through the DHCP relay and deploy the DHCP address pool for the authentication-engaged network segments in the authentication device. In this way, the authentication device can obtain MAC addresses of wireless users through DHCP. In this scenario, set this parameter to Layer-3 Network .
Server Type	Select Connect Wi-Fi via WeChat .
Auth Server URL	After you complete the MACC server configuration, the MACC server returns a URL. The device sends an authentication request to this URL.
Redirect IP	The redirect IP address corresponds to a menu or link address set in the official account. The default value is 118.31.178.137. Generally, you do not need to change the value. After the user is redirected to the WeChat official account, the user needs to visit this IP address before the subsequent authentication steps can continue. Change the value to an IP address in a not used LAN network segment, if required. For details, see Troubleshooting .
Client Escape	After this function is enabled, the authentication function is disabled on the device if the authentication server fails, so that all the users can directly access the Internet. After the server recovers, the authentication function is started automatically.

(1) Configure the authentication scope.

Click **Add** on the current page. In the dialog box that appears, enter the SSID and IP address range that needs authentication, and click **OK**.

For clients that do not need authentication, such as printers, computers, or some users, set **IP/IP Range** to authentication-free, so that these clients can directly access the Internet. For details, see Section [4.10.9 Authentication-Free](#).

Wi-Fi List			+ Add	Delete Selected
Up to 8 entries can be added.				
<input type="checkbox"/>	SSID	IP/IP Range	Action	
<input type="checkbox"/>	test	192.168.110.2-192.168.110.254	Edit	Delete

Add

✕

* SSID

* IP/IP Range

4. Verifying Configuration

When a mobile phone connects to the specific Wi-Fi, the Portal authentication page pops up automatically. The user visits the WeChat page under instructions on the Portal authentication page, follows the WeChat official account, clicks the menu or auto reply link to complete authentication. Then, the user can normally access the Internet. After successful user authentication, you can choose **Advanced > Authentication > Online Clients** to view information about this authenticated user. For details, see Section [4.10.10 Online Authenticated User Management](#).

5. Troubleshooting


- When the user clicks the authentication menu or link in the official account during WeChat authentication, the message **This page cannot be accessed now.** pops up, leading to authentication failure.



**This page cannot be accessed
now.**

Cause: The link address set in the official account authentication entry in the Official Account Platform is regarded as insecure by Security Center of the WeChat client. When a client sends a request to this address, WeChat blocks this request.

Solution: Change the forced redirection address and the address in the official account authentication menu or link to an IP address not used in the LAN. For example, if the network segment 172.29.0.0 is not used in the LAN, set both the official account redirection IP address and the link address in the official account to 172.29.1.140.

 **Caution**

If the official account redirection IP address is set to an IP address in a network segment used in the LAN, WeChat authentication will fail.

Authentication

* Network Type

* Server Type

* Auth Server URL

Redirect IP

Client Escape Enable

4.10.4 Enterprise WeChat Authentication

1. Overview

Similar to WeChat authentication, Wi-Fi users need to jump to the enterprise WeChat after connecting to Wi-Fi and complete applet authentication in the workspace before they can access the Internet. Enterprise WeChat authentication can be used to manage Internet access of employee clients and guest clients in the enterprise environment.

2. Getting Started

Same as those in Section [4.10.3 WeChat Authentication](#). Before you enable enterprise WeChat authentication, complete relevant configurations on the enterprise WeChat console and NOC MACC platform.

3. Configuration Steps

Choose **Local Device > Advanced > Authentication > Cloud Auth**.

The configuration steps are similar to those in WeChat authentication, with major difference in that the official account redirection IP address in enterprise WeChat authentication should be set to 47.104.189.180:81. For details, see Section [4.10.3 WeChat Authentication](#).

[Cloud Auth](#) Local Account Auth Authorized Auth QR Code Auth Whitelist Online Clients

Ruijie Cloud supports voucher authentication, local account authentication, SMS authentication and one-click authentication. Please log into Ruijie Cloud to enable authentication. [View](#)

i In a layer-2 network, if the IP address of the EAP device is in the authentication IP range, please add its MAC address to the MAC address whitelist of Whitelist. **?**

In a layer-3 network, if the IP address of the EAP device is in the authentication IP range, please add its IP address to the IP address whitelist of Whitelist.

Authentication

* Network Type

* Server Type

* Auth Server URL

Redirect IP

Client Escape Enable

4. Employee Authentication

Make sure that the employee has joined the enterprise WeChat organization. When the employee connects the mobile phone to Wi-Fi, the employee is automatically redirected to the enterprise WeChat for authentication. After the employee opens the enterprise WeChat, employee needs to enter the **Workspace** menu of the enterprise WeChat and click the authentication app created by the administrator to obtain Internet access permission. After the authentication success message pops up, the employee can access the Internet normally.

The enterprise WeChat may not be started on the Portal authentication page on some mobile phones due to poor compatibility. If this occurs, users can manually open the enterprise WeChat and continue follow-up operations.

5. Guest Authentication

Guest access to the Internet via Wi-Fi should be authorized by the receptionist. After a guest connects to the guest Wi-Fi, the authentication QR code pops up. At this time, the authenticated employee scans the QR code using the enterprise WeChat on the mobile phone and enters the guest name. Then, the guest can pass authentication and access the Internet normally.

It should be noted that when configuring guest authentication, you need to configure at least two Wi-Fi SSIDs and corresponding network segments in the Wi-Fi list, which are used for employee connection and guest connection, respectively.

Wi-Fi List			+ Add	Delete Selected
Up to 8 entries can be added.				
<input type="checkbox"/>	SSID	IP/IP Range	Action	
<input type="checkbox"/>	test	192.168.110.2-192.168.110.254	Edit	Delete
<input type="checkbox"/>	@Ruijie-guest-2277	192.168.111.2-192.168.111.254	Edit	Delete

4.10.5 WiFiDog Authentication

1. Overview

The EG device is connected to the MACC authentication server on the cloud. After Wi-Fi users connect to Wi-Fi, a Portal page pops up. The users need to enter the account and password to pass authentication before they can access the Internet. According to the authentication configuration on the MACC server, you can set the authentication mode to SMS authentication, fixed account authentication, or account-free one-click login.


2. Getting Started

- (1) WiFiDog is a Layer 2 protocol. Ensure that the authentication device can obtain the MAC addresses of the wireless users.
 - o The gateway address of the wireless users to be authenticated is deployed on the authentication device.
 - o If the gateway address is not deployed on the authentication device, the device functions as a DHCP server to allocate IP addresses to the wireless users and obtain MAC addresses of the wireless users. In this scenario, you need to set Network Type to Layer-3 Network.
- (2) Complete the corresponding configuration on the NOC MACC platform before you enable the authentication function on the device. If SMS authentication is used, you also need to configure the SMS gateway.

3. Configuration Steps

[Local Device] Choose **Local Device > Advanced > Authentication > Cloud Auth**.

- (1) Turn on **Authentication**.
- (2) Set **Server Type** to **Cloud Integration**, configure **Network Type**, **Auth Server URL**, **Client Escape**, and **IP/IP Range**, and click **Save**.

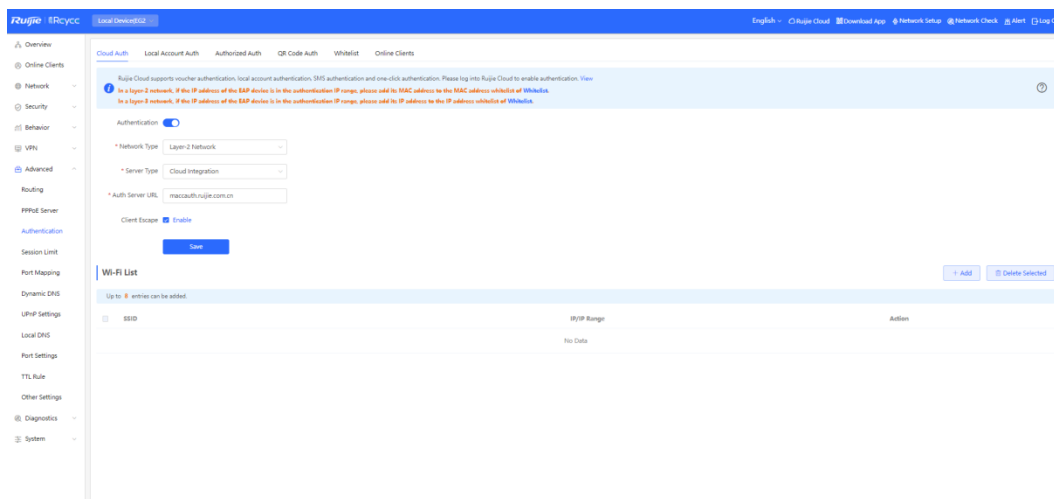

(3) In the **Wi-Fi List** area, click **Add**. In the displayed dialog box, enter the Wi-Fi network name and the IP address/range to be authenticated and click **OK**.

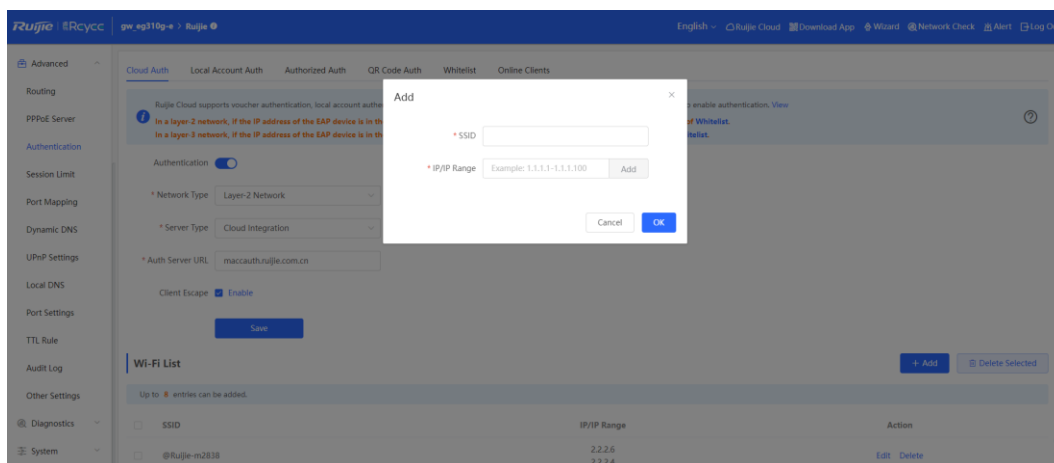


Table 4-6 Description of WiFiDog Authentication Configuration

Parameter	Description
Network Type	The default value is Layer-2 Network . Set the parameter based on the actual network environment.
Server Type	Select Cloud Integration from the drop-down list.
Auth Server URL	After completing the configuration at the MACC server end, the MACC server returns a URL. The device sends authentication requests to the URL during authentication.
Client Escape	After the client escape function is enabled, if an exception occurs on the authentication server, the device disables authentication to allow all clients to directly access the Internet. After the server recovers, the device automatically enables authentication.

Parameter	Description
SSID	Specify the name of a Wi-Fi network, to which clients connect. A maximum of eight Wi-Fi network names can be configured.
IP/IP Range	Specify the IP address range to be authenticated. You can enter a single IP address (such as 192.168.112.2) or an IP address range (such as 192.168.112.2–192.168.112.254). A maximum of five IP address ranges can be configured.

4. Verifying Configuration

After a mobile phone connects to a specific Wi-Fi, the Portal authentication page pops up automatically.

If the authentication mode configured on the MACC server is SMS authentication, the user needs to enter the mobile number to obtain an Internet access password and enter the password to complete authentication.

If the authentication mode configured on the MACC server is account-free one-click authentication, the user can directly access the Internet after clicking the corresponding button on the page.

If the authentication mode configured on the MACC server is fixed account login, the user can access the Internet after entering the account and password configured on the cloud.

After successful connection, you can choose **Advanced** > **Authentication** > **Online Clients** to view information about this authenticated user. For details, see Section [4.10.10 Online Authenticated User Management](#).

4.10.6 Local Account Authentication

1. Overview

The device is connected to the local authentication server, and user identity is verified based on the account and password. Local account authentication is applicable to the wireless office network environment.

2. Getting Started

Ensure that the device with the authentication function enabled has been connected to the Internet. Otherwise, the authentication page does not pop up when a client associates with Wi-Fi.

3. Configuration Steps

Choose **Local Device** > **Advanced** > **Authentication** > **Local Account Auth**.

(1) Enable account authentication.

Turn on **Local Account Auth**, enter the IP address range of clients to be authenticated, and click **Save**. After account authentication is enabled, clients in the specified IP address range can access the Internet only after passing authentication.

Cloud Auth Local Account Auth Authorized Auth QR Code Auth Whitelist Online Clients

Local Account Auth

1. Enable account authentication and create an account.
2. A user logs in with the account created in step 1 and will be allowed to access the Internet.

i Make sure that the device can access the Internet. Otherwise, the Portal page may not pop up on the terminal. **?**

In a layer-2 network, if the IP address of the EAP device is in the authentication IP range, please add its MAC address to the MAC address whitelist of **Whitelist**.

In a layer-3 network, if the IP address of the EAP device is in the authentication IP range, please add its IP address to the IP address whitelist of **Whitelist**.

Local Account Auth

Accounts 1

* Auth IP / IP Range

(2) Configure an authentication account.

Click **Add** to configure an authentication account for Internet access. Multiple clients can access the Internet using the same account and password. The **Concurrent Users** parameter specifies the maximum number of users allowed to access the Internet using the same account.

After a **Wi-Fi user** passes authentication using an account, the IP address of the authenticated user is displayed in the **IP** column next to the account. The account list records a maximum of five latest device IP addresses using the same account.

Account Settings

Up to **200** accounts can be added.

<input type="checkbox"/>	Username	Password	Concurrent Users	IP	Action
<input type="checkbox"/>	test1	test	100		Edit Delete

Add Account

×

* Username

* Password

Concurrent Users

4. Verifying Configuration

After a client connects to the specific Wi-Fi, the authentication page pops up automatically. The user can normally access the Internet only after entering the account and password configured on the local server on the authentication page. You can choose **Advanced > Authentication > Online Clients** to view information about the successfully connected user. For details, see Section [4.10.10 Online Authenticated User Management](#).

4.10.7 Authorized Guest Authentication

1. Overview

The device is connected to the local authentication server. After a guest connects to Wi-Fi, the guest can access the Internet after the specified authorization IP user or account and password authentication user scans the QR code that pops up for guest authentication. For example, in the wireless office network, users in the employee network segment are authorized to scan the guest authentication QR code for users in the guest network segment.

2. Getting Started

Ensure that the device with the authentication function enabled has been connected to the Internet. Otherwise, the authentication page does not pop up when a client associates with Wi-Fi.

3. Configuration Steps

Choose **Local Device > Advanced > Authentication > Authorized Auth**.

Turn on **Authorized Auth**, configure **Popup Message**, **Auth IP / IP Range**, **Authorization IP/IP Range**, and **Limit Online Duration**, and click **Save**.

Cloud Auth Local Account Auth Authorized Auth QR Code Auth Whitelist Online Clients

Authorized Auth
 An authenticated user can authorize guests by scanning his QR code.

Make sure that the device can access the Internet. Otherwise, the Portal page may not pop up on the terminal.

In a layer-2 network, if the IP address of the EAP device is in the authentication IP range, please add its MAC address to the MAC address whitelist of Whitelist.

In a layer-3 network, if the IP address of the EAP device is in the authentication IP range, please add its IP address to the IP address whitelist of Whitelist.

Authorized Auth

Popup Message

* Auth IP / IP Range

Limit Online Duration

* Duration Limit

* Authorization IP/IP Range

Range

Table 4-7 Authorized guest authentication configuration

Parameter	Description
Popup Message	Specify the text to be displayed on the pop-up QR code page.
Auth IP / IP Range	Specify the IP address range for users to be authenticated. The value can be a single IP address (such as 192.168.110.2) or an IP address range (such as 192.168.110.2-192.168.110.254). Users in the specified IP address range can access the Internet only after passing authentication.
Limit Online Duration	Specify whether to limit the online duration of guests. After you enable this function, you need to configure Duration Limit . If the online duration of a guest exceeds the specified value, the guest can continue Internet access only after re-authorization. By default, this function is disabled, indicating that guests can use Wi-Fi without limit on the online duration.
Duration Limit	Specify the maximum online duration of authorized guests. If the online duration of an authorized guest exceeds the specified value, the guest goes offline automatically and needs to be re-authorized for login again.
Authorization IP/IP Range	Specify the IP address range of authorization users. Users in this range can scan the QR code to authorize guests.

4. Verifying Configuration

After a guest connects to Wi-Fi, the QR code authentication page pops up. The guest can access the Internet after the specified authorization user scans this QR code. You can choose **Advanced > Authentication > Online Clients** to view information about the successfully connected user. For details, see Section [4.10.10 Online Authenticated User Management](#).

4.10.8 Guest Authentication Through QR Code Scanning

1. Overview

Guests scan the specified QR code to access the Internet. For example, in the wireless office network, guests scan the pasted QR code to access the Internet after they connect to Wi-Fi.

2. Getting Started

Ensure that the device with the authentication function enabled has been connected to the Internet. Otherwise, the authentication page does not pop up when a client associates with Wi-Fi.

3. Configuration Steps

Choose Local Device > Advanced > Authentication > QR Code Auth.

Turn on **QR Code Auth**, configure **Auth IP / IP Range**, **Limit Online Duration**, and **QR Code Generator**, and click **Save**.

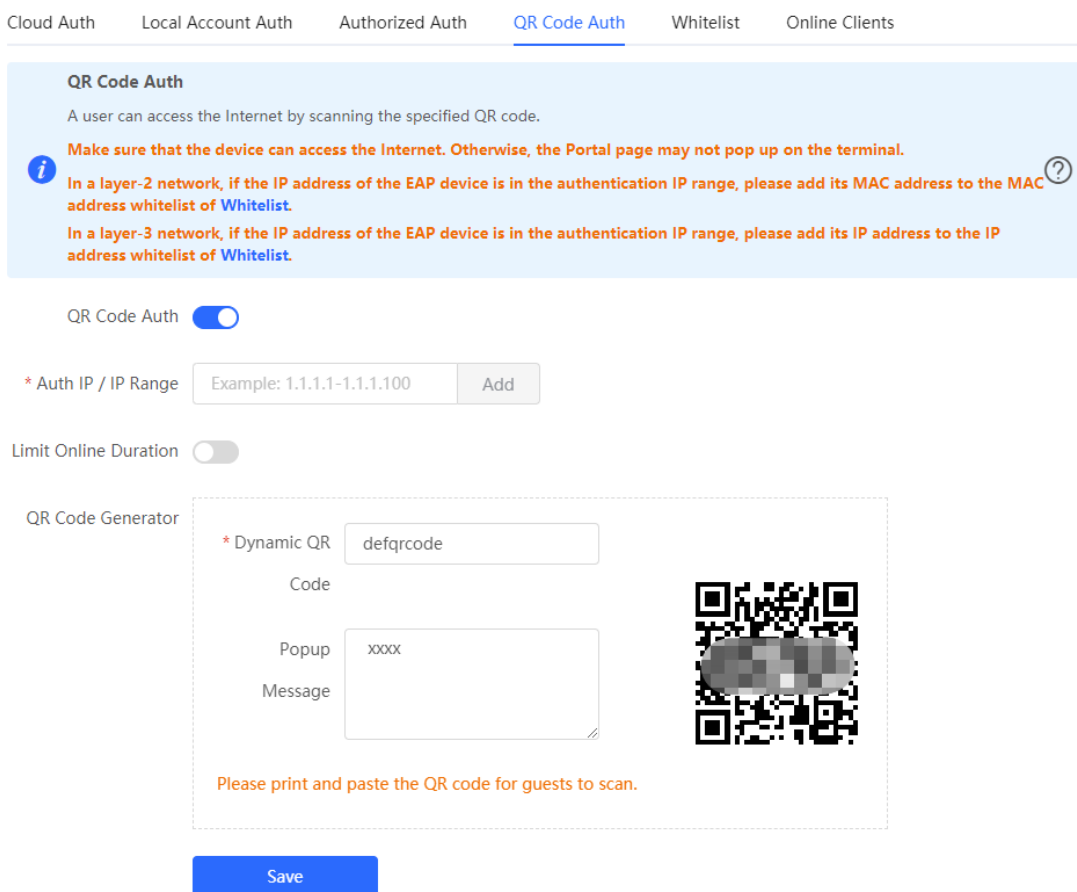


Table 4-8 Guest authentication through QR code scanning configuration

Parameter	Description
Auth IP / IP Range	Specify the IP address range for users to be authenticated. The value can be a single IP address (such as 192.168.110.2) or an IP address range (such as 192.168.110.2-192.168.110.254). Users in the specified IP address range can access the Internet only after passing authentication.
Limit Online Duration	Specify whether to limit the online duration of guests. After you enable this function, you need to configure Duration Limit . If the online duration of a guest exceeds the specified value, the guest needs to scan the QR code again before continuing Internet access. By default, this function is disabled, indicating that guests can use Wi-Fi without limit on the online duration.
Duration Limit	Specify the maximum online duration of authorized guests. If the online duration of an authorized guest exceeds the specified value, the guest goes offline automatically and needs to be re-authenticated.
Dynamic QR Code	The dynamic QR code is used to generate a QR code image. After the dynamic QR code is updated, the QR code image changes and the previous image becomes invalid. You can print and paste the generated QR code image, which can be scanned by guests to access the Internet.
Popup Message	Specify the QR code prompt message displayed on the page after a guest scans the QR code.

4. Verifying Configuration

After a client connects to Wi-Fi, the guest can scan the QR code to pass authentication and access the Internet. You can choose **Advanced > Authentication > Online Clients** to view information about the successfully connected user. For details, see Section [4.10.10 Online Authenticated User Management](#).

4.10.9 Authentication-Free

1. Overview

After IP addresses or MAC addresses are configured for authentication-free users, they can directly access the Internet without passing authentication. Traffic from all the users in the blacklist is blocked.

2. Configuring an Authentication-Free User

Choose **Local Device > Advanced > Authentication > Whitelist > User Whitelist**.

Authentication-free user: Users in the specified IP address range can directly access the Internet without passing authentication.

Click **Add** to configure the IP address range for authentication-free users. The value can be a single IP address (such as 192.168.110.2) or an IP address range (such as 192.168.110.2-192.168.110.254). A maximum of 50 entries are supported.

Cloud Auth Local Account Auth Authorized Auth QR Code Auth Whitelist Online Clients

i A user configured with whitelisted IP or MAC address can access the Internet without authentication.

User Whitelist + Add Delete Selected

Up to **50** entries can be added.

<input type="checkbox"/>	IP / IP Range	Action
No Data		

Add ×

* IP / IP Range

Cancel OK

3. Configuring Extranet IP Addresses for Authentication-Free

Choose **Local Device > Advanced > Authentication > Whitelist > IP Whitelist**.

Extranet IP address for authentication-free: Specify the IP addresses that can be assessed by all users including unauthenticated users.

Click **Add** to configure extranet IP addresses that can be assessed by users without authentication. A maximum of 50 entries are supported.

IP Whitelist + Add Delete Selected

Up to **50** entries can be added.

<input type="checkbox"/>	IP / IP Range	Action
No Data		

Add ×

* IP / IP Range

4. Configuring a URL Whitelist

Choose **Local Device > Advanced > Authentication > Whitelist > URL Whitelist**.

URL Whitelist: Specify the URLs that can be accessed without authentication.

Click **Add**. In the dialog box that appears, enter the authentication-free URLs, and then click OK. When the destination URL of the user is in the URL whitelist, traffic from the user will be permitted directly, regardless of whether the user passes authentication. A maximum of 100 entries are supported.

URL Whitelist

Up to **100** entries can be added.

	URL	Action
<input type="checkbox"/>		
<input type="checkbox"/>	ruijienetworks.com	Edit Delete

< **1** > Total 1

Add ×

* URL

5. Configuring a User MAC Whitelist

Choose **Local Device > Advanced > Authentication > Whitelist > MAC Whitelist**.

MAC Whitelist: Clients whose MAC addresses are in the whitelist can access the Internet through Wi-Fi without the need for authentication.

Click **Add**. In the dialog box that appears, enter the MAC addresses of authentication-free users, and then click **OK**. A maximum of 250 entries are supported.

MAC Whitelist [+ Add](#) [Delete Selected](#)

Up to **250** entries can be added.

<input type="checkbox"/>	MAC	Action
No Data		

< **1** > 10/page Total 0

Add ×

* MAC

6. Configuring a User MAC Blacklist

Choose **Local Device > Advanced > Authentication > Whitelist > MAC Blacklist**.

User MAC blacklist: Clients whose MAC addresses are in the blacklist are prohibited from accessing the Internet.

Click **Add**. In the dialog box that appears, enter the MAC addresses of users in the blacklist, and then click **OK**. A maximum of 250 entries are supported.

MAC Blacklist [+ Add](#) [Delete Selected](#)

Up to **250** entries can be added.

<input type="checkbox"/>	MAC	Action
No Data		

Add ×

* MAC

4.10.10 Online Authenticated User Management

1. Configuring the Idle Client Timeout Period

Choose **Local Device > Advanced > Authentication > Online Clients**.

You can configure the idle client timeout period. The default value is 15 minutes. If no traffic from an online user passes through the device within the specified period, the device will force the user offline. The user can continue Internet access only after re-authentication.

Cloud Auth
Local Account Auth
Authorized Auth
QR Code Auth
Whitelist
Online Clients

i **Online Clients**

Auth Settings

Idle Client Timeout Min (Range: 5-65535)

2. Kicking a User Offline

The online client list displays information about all the current online clients, including the client IP address, client MAC address, login time, and authentication mode. You can find the client information based on the IP address, MAC address, or username. Find the target client in the online client list and click **Delete** in the **Action** column to kick the client off and disconnect the Wi-Fi connection of the client.

Online Clients

<input type="checkbox"/>	Username	IP	MAC	Up on	Duration(Sec)	Auth Type	Status	Action
No Data								

4.11 Enabling Reyee Mesh

Choose **Network > Reyee Mesh**.

After Reyee Mesh is enabled, you can set up a Mesh network through Mesh pairing between the devices that support Reyee Mesh. You can press the **Mesh** button on the device to automatically discover a new device for Mesh pairing or log in to the management page to select a new device for Mesh pairing. Reyee Mesh is enabled on the device by default.

Enable Mandatory ?

Roaming

..... Collapse

Mesh Discovery ?

Save

4.12 Configuring the LAN Port of Downlink Access Point

Caution

The configuration takes effect only for a downlink access point with a wired LAN port.

Choose **Network > LAN Ports**.

Enter the VLAN ID and click **Save** to configure the VLAN, to which the AP wired ports belong. If the VLAN ID is null, the wired ports and WAN port belong to the same VLAN.

In self-organizing network mode, the AP wired port configuration applies to all APs having wired LAN ports on the current network. The configuration applied to APs in **LAN Port Settings** takes effect preferentially. Click **Add** to add the AP wired port configuration. For APs, to which no configuration is applied in **LAN Port Settings**, the default configuration of the AP wired ports will take effect on them.

LAN Port Settings
The configuration takes effect only for the AP with a LAN port, e.g., EAP101.
Note: The configured LAN port settings prevail. The AP device with no LAN port settings will be enabled with default settings.

Default Settings

VLAN ID [Add VLAN](#)

(Range: 2-232 and 234-4090. A blank value indicates the same VLAN as WAN port.)

Applied to AP device with no LAN port settings ⓘ

[Save](#)

LAN Port Settings

[+ Add](#)

[Delete Selected](#)

Up to 8 VLAN IDs or 32 APs can be added (1 APs have been added).

<input type="checkbox"/>	VLAN ID ⇅	Applied to	Action
<input type="checkbox"/>	2	Ruijie	Edit Delete

5 Switch Management

5.1 Configuring RLDP

5.1.1 Overview

Rapid Link Detection Protocol (RLDP) is an Ethernet link fault detection protocol used to quickly detect link faults and downlink loop faults. RLDP can prevent network congestion and connection interruptions caused by loops. After a loop occurs, the port on the access switch involved in the loop will shut down automatically.


5.1.2 Configuration Steps

Choose **Network** > **RLDP**.

- (1) Click **Enable** to access the **RLDP Config** page.

RLDP

RLDP will avoid network congestion and connection interruptions caused by loops. After a loop occurs, the port involved in the loop will be automatically shut down.




- (2) In the networking topology, you can select the access switches on which you want to enable RLDP in either recommended or custom mode. If you select the recommended mode, all access switches in the network are selected automatically. If you select the custom mode, you can manually select the desired access switches. Click **Deliver Config**. RLDP is enabled on the selected switches.

← RLDP Config


Please select the target switch:

Recommended
Auto-Identified Switches

Custom
Specified Switches

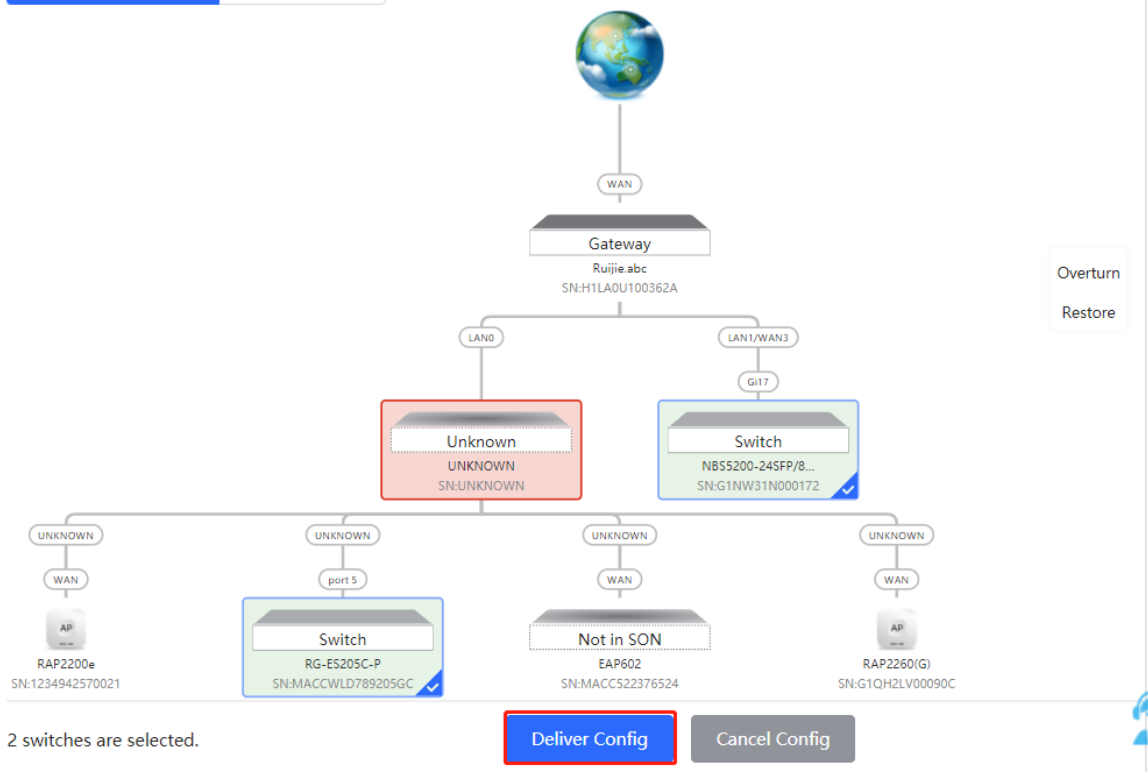

- (3) After the configuration is delivered, if you want to modify the effective range of the RLDP function, click **Configure** to select desired switches in the topology again. Turn off **RLDP** to disable RLDP on all the switches with one click.

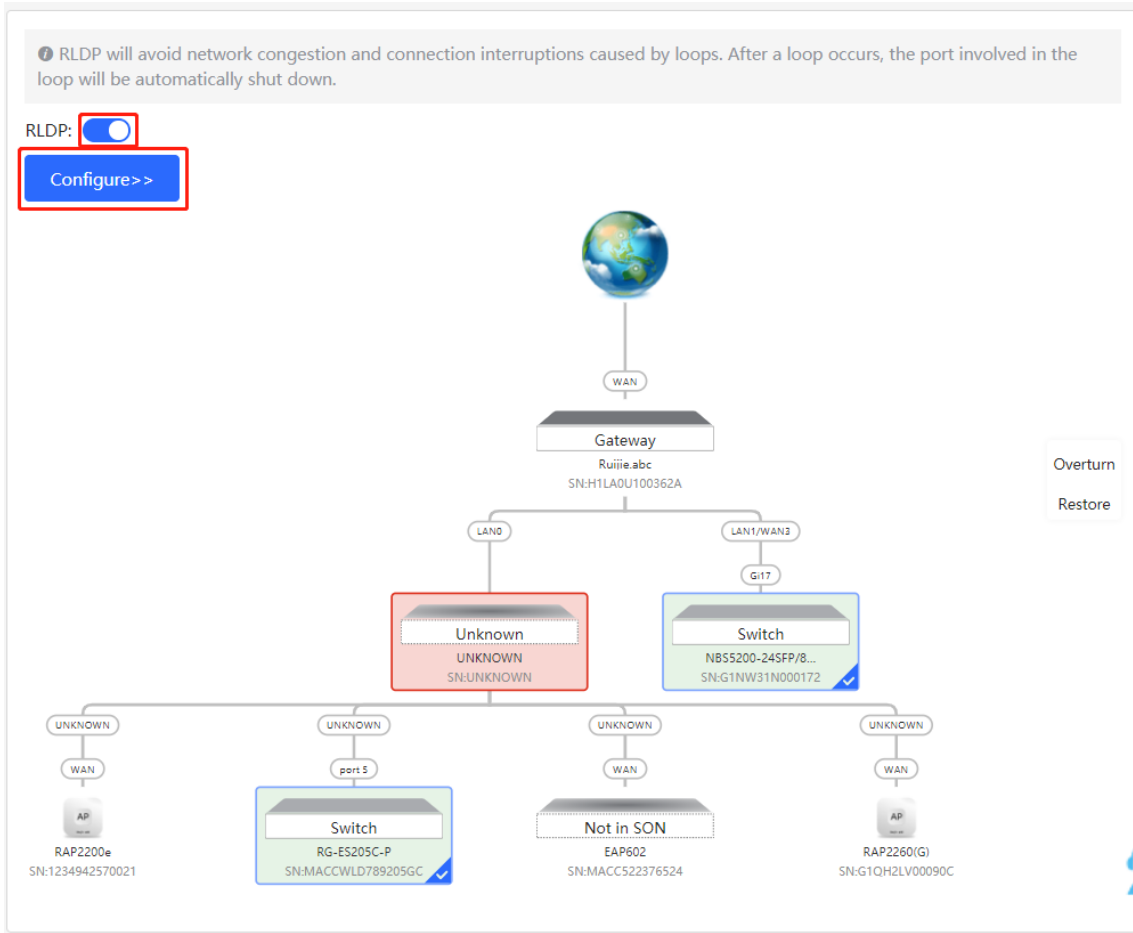

5.2 Configuring DHCP Snooping

5.2.1 Overview

DHCP Snooping implements recording and monitoring the usage of client IP addresses through exchange of DHCP packets between the server and client. In addition, this function can filter invalid DHCP packets to ensure that clients can obtain network configuration parameters only from the DHCP server in the controlled range. DHCP Snooping will prevent rogue DHCP servers offering IP addresses to DHCP clients to ensure the stability of the network.

Caution

After DHCP Snooping is enabled on the switch, the switch does not forward invalid DHCP packets. However, if a client directly connects to a rogue DHCP server, it cannot access the Internet as the obtained IP address is incorrect. In this case, you need to find the rogue router and disable DHCP on it, or use the WAN port for uplink connection.

5.2.2 Configuration Steps

Choose **Network > DHCP Snooping**.

- (1) Click **Enable** to access the **DHCP Snooping Config** page.


DHCP Snooping

DHCP snooping will prevent rogue

DHCP servers offering IP addresses

to DHCP clients to ensure the

stability of the network.



- (2) In the networking topology, you can select the access switches on which you want to enable DHCP Snooping in either recommended or custom mode. If you select the recommended mode, all switches in the network are selected automatically. If you select the custom mode, you can manually select the desired switches. Click **Deliver Config**. DHCP Snooping is enabled on the selected switches.

← DHCP Snooping Config

Please select the target switch:

Recommended All Switches Custom Specified Switches

Overturn
Restore

1 switches are selected.

Deliver Config Cancel Config

- (3) After the configuration is delivered, if you want to modify the effective range of the DHCP Snooping function, click **Configure** to select desired switches in the topology again. Turn off **DHCP Snooping** to disable DHCP Snooping on all switches with one click.

ⓘ DHCP snooping will prevent rogue DHCP servers offering IP addresses to DHCP clients to ensure the stability of the network.

DHCP Snooping:

[Configure >>](#)

The diagram illustrates a network topology. At the top is a Gateway (Huawei Ruijie) connected to a WAN. Below it, a LAN is connected to a red 'Unknown' switch and a blue 'Switch' (Huawei NB55200-245FP/8...). The 'Unknown' switch is connected to four devices: an AP (RAP2200e), a Switch (RG-ES205C-P), a 'Not in SON' device (EAP602), and another AP (RAP2260(G)). The blue switch is connected to a LAN/WAN3 interface (GI17) and also has four devices connected to it: an AP (RAP2200e), a Switch (RG-ES205C-P), a 'Not in SON' device (EAP602), and another AP (RAP2260(G)).

Overturn
Restore

5.3 Batch Configuring Switches


5.3.1 Overview

You can batch create VLANs, configure port attributes, and divide port VLANs for switches in the network.


5.3.2 Configuration Steps

Choose **Network > Batch Config**.

- (1) The page displays all switches in the current network. Select the switches to configure, and then select the desired ports in the device port view that appears below. If there are a large number of devices in the current network, select a product model from the drop-down list box to filter the devices. After the desired devices and ports are selected, click **Next**.

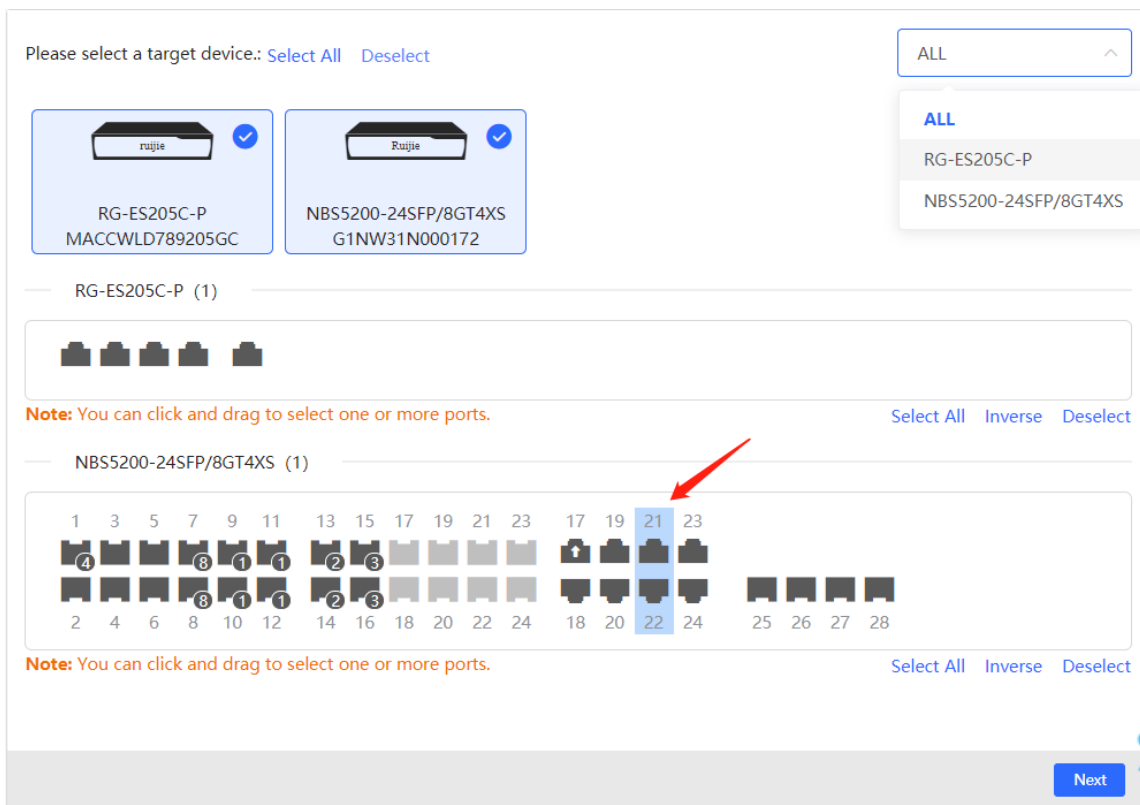

- (2) Click **Add VLAN** to create a VLAN for the selected devices in a batch. If you want to create multiple VLANs, click **Batch Add** and enter the VLAN ID range, such as 3-5,100. After setting the VLANs, click **Next**.

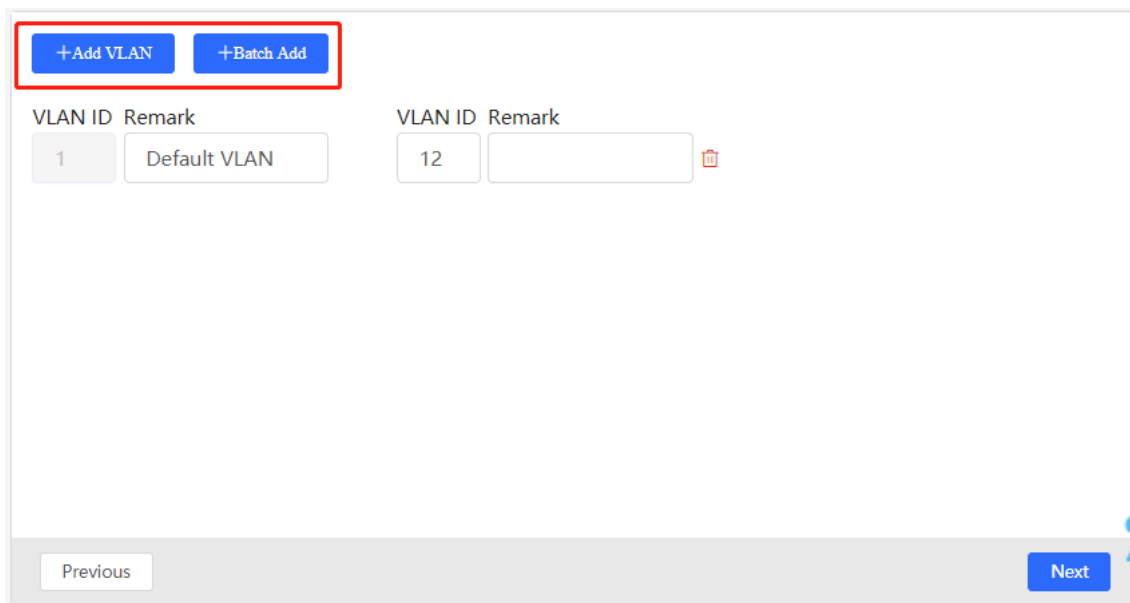

- (3) Configure port attributes for the ports selected in Step 1 in a batch. Select a port type. If you set **Type** to **Access Port**, you need to configure **VLAN ID**. If you set **Type** to **Trunk Port**, you need to configure **Native VLAN** and **Permitted VLAN**. After setting the port attributes, click **Override** to deliver the batch configurations to the target devices.

Port

Selected Port RG-ES205C-P; ; NBS5200-24SFP/8GT4XS: [Gi21-Gi22](#);

Type

* Native VLAN

Permitted VLAN

5.3.3 Verifying Configuration

View the VLAN and port information of switches to check whether the batch configurations are successfully delivered.

MSW

Hostname: [Ruijie](#) Software Ver:ReyeeOS 1.86.1619
Model:NBS5200-24SFP/8GT4XS MGMT IP:10.44.78.1
SN:G1NW31N000172 MAC: 00:d3:f8:15:08:5b

Port Status

VLAN Info

Port

Route Info

RLDP

More

VLAN [Edit](#)

VLAN1 **VLAN12**

Interface	IP	IP Range	Remark
Gi17,Gi21-22,Te27			

Port [Edit](#)

1 Web-based Configuration Guide

Firewall Management


After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

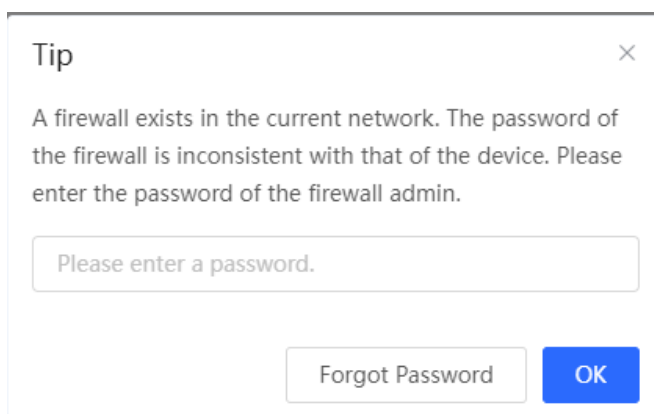

A tip dialog box with a close button (X) in the top right corner. The text inside reads: "A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin." Below the text is a text input field containing the placeholder text "Please enter a password.". At the bottom of the dialog are two buttons: "Forgot Password" and "OK".

6 Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

6.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

- (2) The basic information, capacity, and security service license of the firewall are displayed on the Web management system.

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Firewall info Firewall Port Config

Firewall Info

Hostname: RG-WALL
Model: ZS100-S
IP: 192.168.110.4
SN: 1234842571039
MAC: 00:00:18:91:a0:a0
Software Ver: NGFW_NTOS 1.0R3, Release(02211502)

[Manage Firewall](#)

License

Activated Licenses: 1. [How to obtain a license?](#)

Capacity 95/100

Available Capacity:3G (Default Capacity:3G-Licensed Capacity:0G)
Remaining Capacity:7G

No.	Security Service Name	Description	License Type	Status
1	App Identification (APP)	Provide the upgrade of the firewall app identification library.	Official License	Activated Expiry Date: 2023-07-26
2	Intrusion Prevention System (IPS)	Provide the upgrade of the firewall IPS application library.	-	Not Activated
3	Anti-Virus(AV)	Provide the upgrade of the firewall AV library.	-	Not Activated

Click **Manage Firewall** to go to the Web management interface of the firewall. Configure the security policy and license activation for the firewall. For details, see the Web-based configuration guide of the firewall.

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Please enter a password.

6.2 Configuring Firewall Port

If the firewall is set to transparent mode, the **Firewall Port Config** page appears. You can select the WAN port connected to the gateway or the LAN port connected to the switch and enable **Security Guard**.



1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.



Tip

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Please enter a password.

Forgot Password OK

7 Online Behavior Management

7.1 Overview

Online behavior management aims to block or prohibit specific Internet access behaviors of LAN users. Online behavior management functions are classified into five categories: app control, website filtering, QQ management, flow control, and access control. The effective range of each behavior management policy is flexibly controlled by the specified client IP address and effective time.

7.2 User Management

7.2.1 Overview

The management policy of online behavior needs to flexibly match with specific user groups. Please manage and classify users before the behaviour management policy is configured, ensuring efficient configuration and management. User management is used to maintain user information based on IP addresses. When managing online behaviours, you can limit the effective scope of application blocking, traffic auditing, flow control and other services by specifying created or authenticated users.

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

User groups contain two default root user groups: User Group and Authentication Group. You can create and configure users and user groups under the root user group.

User Management
400 of entries that can be added in a user group. Current User Groups: 2; Current Users: 1.

Search by Group

<input type="checkbox"/>	Username	IP Range	Action
<input type="checkbox"/>	User Group		
<input type="checkbox"/>	Authentication Group		

No Data

7.2.2 User Group

Choose **Local Device > Behavior > User Management**.

You can add new user groups or users below the first-level user group. Up to three levels of grouping is supported. If a user is a leaf node, no users or user groups can be created below this leaf node. A created user group can be used as a configuration item in a behavior management policy and is directly referenced by the user group name.

All Addresses group exists in the user group list by default. The IP range is from 1.1.1.1 to 255.255.255.255. This group cannot be edited or deleted.

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

User Management
400 of entries that can be added in a user group. Current User Groups: 2; Current Users: 1.

<input type="checkbox"/>	User Group	Username	IP Range	Action
<input type="checkbox"/>	All Addresses <input type="button" value="+"/> <input type="button" value="−"/>			
<input type="checkbox"/>	Authentication Group	1.1.1.1-255.255.255.255	1.1.1.1-255.255.255.255	Edit Delete

1. Creating a User Group

Click near **User Group** or click **Add** at the upper right of the page. Select the type of **User Group** and enter the group name, and click **OK**. You can create a sub-user group below this user group.

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Please enter a password.

Forgot Password **OK**

Search by Group

- ▼ User Group +
All Addresses + 🗑️
- ▶ Authentication Group

Add ×

Type User Group Client

Parent Node × ▼

* Group Name

Cancel **OK**

Table 6-1 Parameter Descriptions of User Group

Parameter	Description
Parent Node	Configure the parent group to which the created user group belongs. Up to three levels of groups are allowed below a user group currently (such as Root Node/R&D Center/R&D Section 1). No user groups are allowed below the third-level group.
Group Name	Indicate the name of the user group.

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.


Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

2. Creating a User

Click **User Group** to display the users in the current group. Click  or click **Add** at the upper right of the page. Select the type of **Client** and enter the user name and IP range, and click **OK**. You can create a user under the user group.

User Management
400 of entries that can be added in a user group. Current User Groups: 3; Current Users: 1.

Search by Group

<input type="checkbox"/>	Username	IP Range	Action
<input type="checkbox"/>	All Addresses		<input type="button" value="+"/> <input type="button" value=""/>
<input type="checkbox"/>	test		<input type="button" value="+"/> <input type="button" value=""/>
<input type="checkbox"/>	Authentication Group		
No Data			

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Please enter a password.

Add ×

Type User Group Client

Parent Node × ▼

* Username

* IP / IP Range

Table 6-2 Parameter Descriptions of User

Parameter	Description
-----------	-------------

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.


- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Parameter	Description
Parent Node	Configure the group to which the created user belongs, Click the drop-down list box to display all the currently created user groups and click to select one group.
Username	Indicate the name of the user.
IP /IP Range	Indicate the IP address of the user. You can enter an IP address or IP range. If a rule is valid to this user, the rule takes effect in this IP range.

3. Deleting a User Group or a User

Click  near **User Group** to delete the user group and its members. Click **Delete** in the **Action** bar in the user list to delete the specified user.

User Management
400 of entries that can be added in a user group. Current User Groups: 3; Current Users: 2.

Search by Group

	Username	IP Range	Action
<input type="checkbox"/>	abc	172.26.1.200-172.26.1.210	<input type="button" value="Edit"/> <input type="button" value="Delete"/>

< **1** > 10/page Total 1

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

4. Verifying Configuration

- (1) You can view the created user groups on the left part of the page after user groups and users are configured. Click **User Group** to view user details in this group.

User Management
400 of entries that can be added in a user group. Current User Groups: 4; Current Users: 3.

Search by Group

<input type="checkbox"/>	User Group	Username	IP Range	Action
<input type="checkbox"/>	All Addresses			
<input type="checkbox"/>	test	xyz	2.2.2.2	Edit Delete
<input type="checkbox"/>	test_1			
<input type="checkbox"/>	Authentication Group			
<input type="checkbox"/>	Local Authentication...			

Total 1

- (2) When configuring the behaviour management policy (such as adding an application control rule), you can view and select the created user groups and the members.

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Please enter a password.

Forgot Password OK

Add App ×

Type User Group Custom

* User Group × ?

Time

* Blocked App

Remark

Status

Cancel OK

- [-] User Group
 - All Addresses
 - [-] test
 - abc
 - test_1
 - Authentication Group

1 Web-based Configuration Guide

Firewall Management


After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

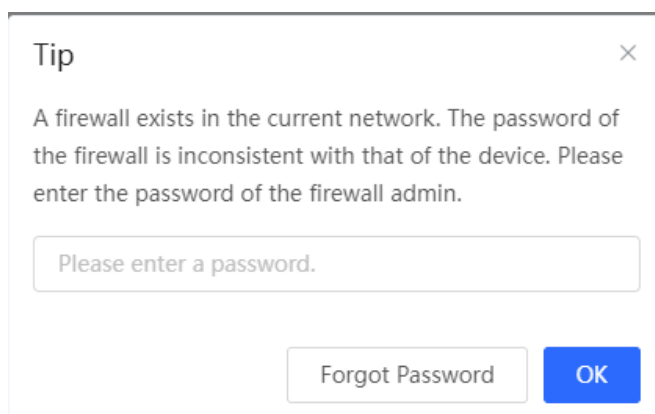

A tip dialog box with a title bar containing the word "Tip" and a close button (X). The main text reads: "A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin." Below the text is a text input field with the placeholder text "Please enter a password.". At the bottom of the dialog are two buttons: "Forgot Password" and "OK".

7.2.3 Authentication Group

Choose **Local Device > Behavior > User Management**.

The users in the **Authentication Group** are synchronized from the authentication server to the **Authentication Group**. The local authentication account set by the device (See Section [4.10.6 Local Account Authentication](#) for details.) is automatically synchronized to the **Local Authentication Group**.

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Local Account Auth

Accounts 1

* Network Type

* Auth IP / IP Range

Account Settings

Up to 200 accounts can be added.

<input type="checkbox"/>	Username	Password	Concurrent Users	MAC	Action
<input type="checkbox"/>	test	test	5		Edit Delete

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

- ▼ User Group
 - All Addresses
 - ▼ test
 - test_1
- ▼ Authentication Group
 - ▼ Local Authentication Group
 - test

When configuring the behaviour management policy (such as adding an application control rule), you can configure a policy to take effect in the specified authentication group. After an authenticated user goes online, the user automatically matches with the authentication group and then associates with the behaviour management policy, enabling online behavior control over the authenticated user.

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Please enter a password.

Forgot Password OK

Add App ×

Type User Group Custom

* User Group Authentication Group × ▲ ?

Time User Group
 Authentication Group
 Local Authentication Gro...

* Blocked App test

Remark

Status

Cancel OK

1 Web-based Configuration Guide

Firewall Management


After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

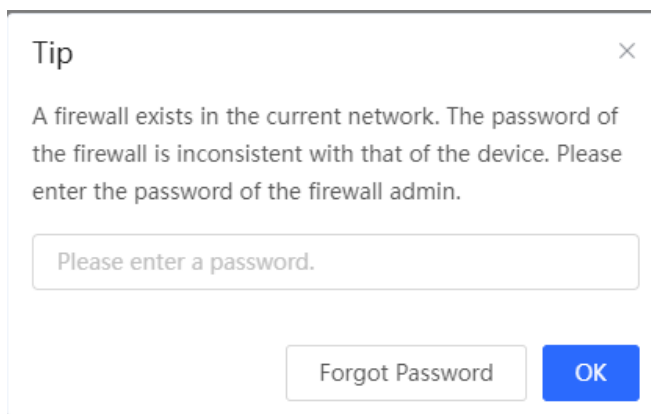

A screenshot of a 'Tip' dialog box. The dialog has a title bar with the word 'Tip' and a close button (X). The main text reads: 'A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.' Below the text is a text input field with the placeholder text 'Please enter a password.'. At the bottom of the dialog are two buttons: 'Forgot Password' and 'OK'.

7.3 Time Management

Choose **Local Device > Behavior > Time Management**.

You can create time entries to classify time information. A created time entry can be used as a configuration item in a behavior management policy and is directly referenced by the time entry name.

Click **Add**. In the dialog box that appears, enter the time entry name and select the specific time to create a time entry.

All the created time entries are displayed in the time entry list. In the list, find the target time entry and click **Edit** to modify the time span. Find the target time entry and click **Delete** to delete it. By default, the time entries named **All Time**, **Weekdays**, and **Weekends** are available and they cannot be modified or deleted.

Caution

If a time entry is referenced in any policy, it cannot be deleted on the **Time Management** page. To delete the time entry, remove the reference relationship first.

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Forgot Password OK

i Time List ?

Time List + Add Delete Selected

Up to 20 entries can be added.

<input type="checkbox"/>	Time Name	Time Span	Action
<input type="checkbox"/>	All Time		Edit Delete
<input type="checkbox"/>	Weekdays		Edit Delete
<input type="checkbox"/>	Weekends		Edit Delete

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Add Time ×

* Time Name

* Time

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

×

	Mon	Tue	Wed	Thu	Fri	Sat	Sun
00:00							
01:00							
02:00							
03:00							
04:00							
05:00							
06:00							
07:00							
08:00							
09:00							
10:00							
11:00							
12:00							
13:00							
14:00							
15:00							
16:00							
17:00							
18:00							
19:00							
20:00							
21:00							
22:00							
23:00							
23:59							

1 Web-based Configuration Guide

Firewall Management


After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

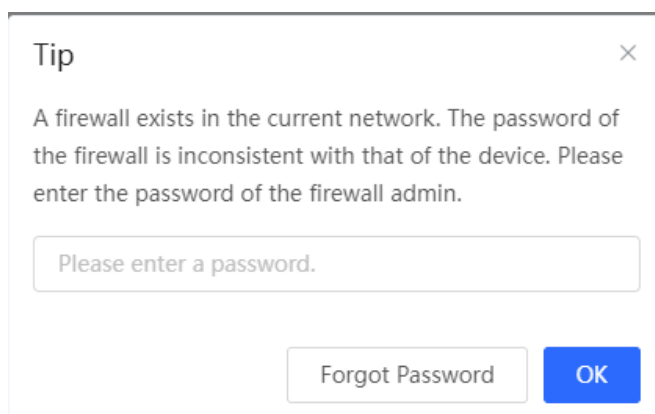

A screenshot of a 'Tip' dialog box. The title bar says 'Tip' with a close button (X). The main text reads: 'A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.' Below the text is a text input field with the placeholder text 'Please enter a password.'. At the bottom, there are two buttons: 'Forgot Password' and 'OK'.

7.4 App Control

7.4.1 Overview

App control aims at controlling the range of specific apps that can be accessed by users. By default, users can access any app. After an app control policy is configured, users in the current network cannot access prohibited apps. App access can be prohibited based on the specified user group and time range. For example, employees in the office network are prohibited from accessing entertainment and game software during work periods to improve network security.

7.4.2 Configuring App Control

Choose **Local Device > Behavior > App Control**.

1. Switching the Application Library

The application lists vary in different regions. The Chinese and International versions of the application library are provided. Please select the version based on the regions.

Click to select **Application Library Version** and click **OK**. The version is switched after a few minutes.

Caution

- It takes about one minute to switch the application library version. Please wait.
-

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

- If you switch the application library, the old application control policy may be inactive. Please proceed with caution.

i App Control ?

App Control

Up to **50** entries can be added.

<input type="checkbox"/>	IP Address Group	Time	Blocked App	Status	Remark	Action
No Data						

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Forgot Password OK

2. Configuring App Control

Click **Add** to create an App control policy.

i App Control ?

App Control Application Library Version: International + Add Delete Selected

Up to 50 entries can be added.

<input type="checkbox"/>	User Group	Time	Blocked App	Status	Remark	Action
<input type="checkbox"/>	1.1.1.1-1.1.1.254	All Time 📅	Play	Enable 🔄		Edit Delete
<input type="checkbox"/>	User Group/test/abc	Weekdays 📅	Video	Enable 🔄		Edit Delete

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Add App ×

IP Address Group

Time

* Blocked App
Please select at least one

Remark

Status

Table 7-3 App control policy configuration

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Parameter	Description
Type	<ul style="list-style-type: none">● User Group: The policy is applicable to users in the specified user group. Please select the target user group.● Custom: The policy is applicable to users in the specified IP range. Please manually enter the managed IP range.
User Group	Select the users managed by the policy from the list of user groups. For the configuration of the user group list, see Section 6.2 User Management . If all members in the user group are selected, the policy takes effect for the user group and is also valid for new members added to this group.
IP Address Group	If the IP range is restricted by the APP control policy and the type of the policy is set to Custom , please enter the IP range manually.
Time	Specify the time range under app control. In the specified time range, managed clients cannot access the selected apps in the list of prohibited apps. You can select a time range defined in Section 7.3 Time Management from the drop-down list box, or select Custom and manually enter the specific time range.

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Parameter	Description
Blocked App	Specify the apps or app groups to block.
Remark	Enter the policy description.
Status	Specify whether to enable the app control policy.

7.4.3 Upgrading the Application Library

1. Overview

The app control function relies on the accuracy of the application library, and the application library is updated with the app version. You can upgrade the application library to the latest version on the **Application Library Update** page.

2. Procedure

[Local Device] Choose **Behavior > App Control > Application Library Update**.

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Caution

- Upgrading the application library version takes about one minute to take effect. Do not cut off power during the upgrade. You can view the current application library version on the page.
 - Perform subsequent operations based on the memory information displayed on the page. If the memory is insufficient, you are advised to restart the device and then upgrade the application library.
 - After the application library is upgraded, the original app control policy may become invalid. Therefore, exercise caution when performing this operation.
-

- (1) Click **Browse**. Select an application library upgrade file.
- (2) Click **Upload** to upload the upgrade file.
- (3) Click **OK**. Wait for the system to automatically complete the upgrade.

1 Web-based Configuration Guide

Firewall Management



After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

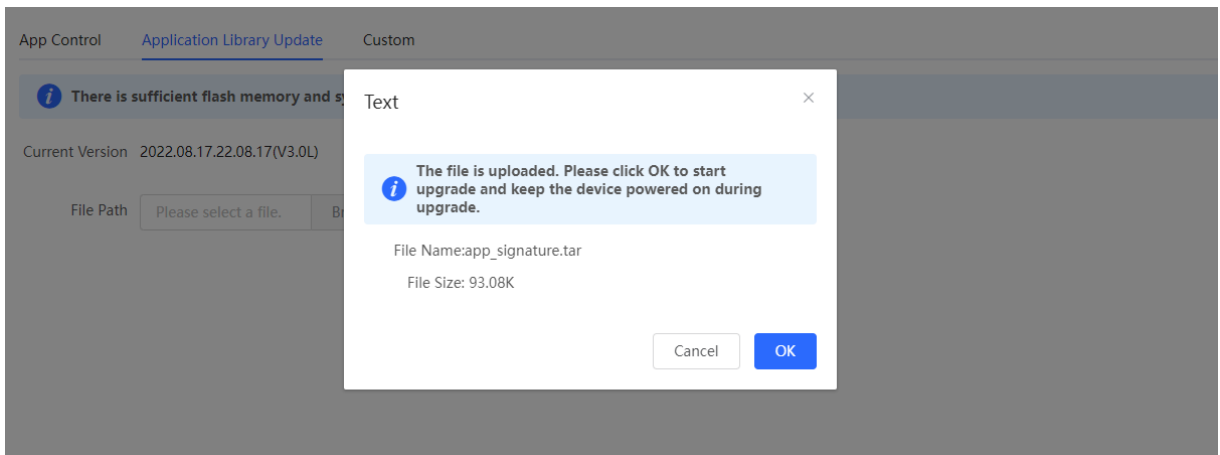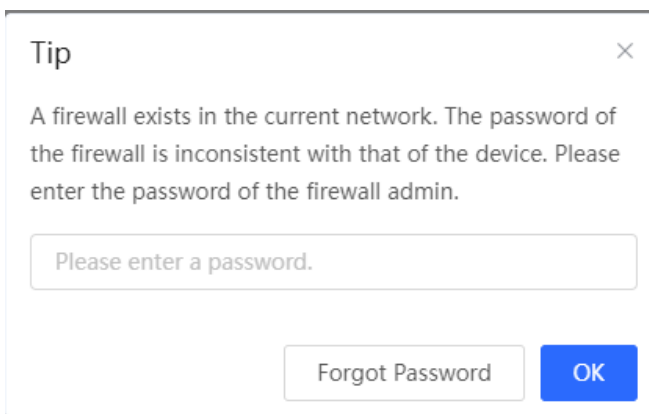

7.4.4 Custom App

1. Overview

Based on traffic packets of certain websites or apps that are captured by the device, users can analyze and extract 5-tuple information characteristics (protocol, source IP address, source port, destination IP address, and destination port) of the packets. You can define apps that are not in the default application list.

1 Web-based Configuration Guide

Firewall Management


After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

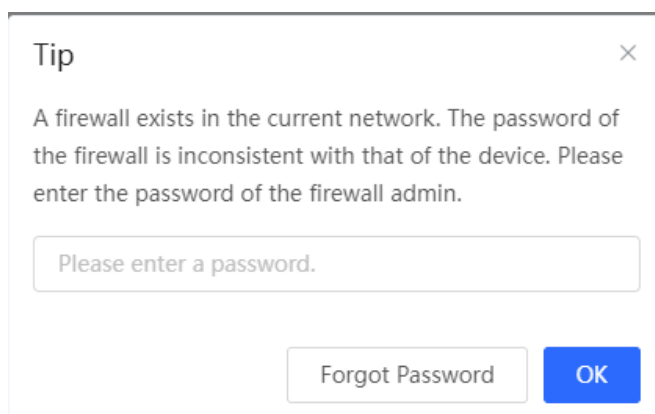

A tip dialog box with a close button (X) in the top right corner. The text inside reads: "A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin." Below the text is a text input field containing the placeholder text "Please enter a password.". At the bottom of the dialog are two buttons: "Forgot Password" and "OK".

After custom apps are configured successfully, you can configure control policies for custom apps on the app control page to block users from accessing the custom apps on the current network.

2. Procedure

[Local Device] Choose **Behavior > App Control > Custom**.

- (1) Switch the application library.

The supported app list varies with regions. There are the application library of the Chinese version and the application library of the international version. Select an application library version based on the actual region.

Click **Application Library Version** and select a version. In the displayed dialog box, click **OK**. Wait a period of time for the system to complete switching.

Caution

- Switching the application library version takes about 1 minute to take effect.
 - After the application library version is switched, the original app control policy may become invalid. Therefore, exercise caution when performing this operation.
-

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Please enter a password.

Forgot Password **OK**

The screenshot shows the 'Custom' configuration page. At the top, there are tabs for 'App Control', 'Application Library Update', and 'Custom'. Below the tabs, there is a header 'Custom' and a sub-header 'Application Library Version: International'. There are search and action buttons: '+ Add' and 'Delete Selected'. A table with columns 'App', 'Protocol Type', 'Source IP', 'Destination IP', 'Destination Port', and 'Action' is shown, but it is empty with 'No Data' below it. A dropdown menu is open over the 'Destination IP' column, showing 'China' and 'International' options. At the bottom, there is a pagination control showing '1' of 1 page and '10/page'.

- (2) Click **Add**. Enter information about a custom app.

The screenshot shows the 'Add App' dialog box overlaid on the 'Custom' configuration page. The dialog has the following fields and options:

- * App: [Text input field]
- Protocol Type: TCP (dropdown)
- Control Type: Dest IP + Dest Port (dropdown)
- * Destination IP: Enter Manually Auto Assign. Example: 1.1.1.1 or 1.1.1.1-1.1.1.10
- * Destination Port: Enter Manually Auto Assign. Example: X or X-X (Range: 1-6553)

Buttons: Cancel, **OK**

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Table 7-4 Description of Custom App Configuration

Parameter	Description
App	Configure the app name (the name cannot be duplicated with a name in the app list).
Protocol Type	Select a protocol type based on the protocol used by captured packets. It can be set to TCP , UDP , or IP .
Control Type	Select a rule type based on 5-tuple information characteristics of extracted packets. It can be set to the following: <ul style="list-style-type: none">● Src IP + Src Port● Dest IP + Dest Port● Src IP+ Dest IP
Source/Destination IP	Enter a characteristic IP address.
Source/Destination Port	Enter a characteristic port number.

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×


A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Note

- If **Control Type** is set to **Src IP + Src Port**, you need to set the source IP address and source port.
- If **Control Type** is set to **Dest IP + Dest Port**, you need to set the destination IP address and destination port.
- If **Control Type** is set to **Src IP + Dest IP**, you need to set the source and destination IP addresses. The source IP address can be also to **Auto Assign**.

- (3) Click **OK**.

App Control Application Library Update Custom

 Custom

Custom Application Library Version: International App

Up to 500 entries can be added.

<input type="checkbox"/>	App	Protocol Type	Source IP	Destination IP	Source Port	Destination Port	Action
<input type="checkbox"/>	test1	TCP	Auto Assign	1.1.1.1-1.1.1.30	Auto Assign	1-500	Edit Delete
<input type="checkbox"/>	test2	UDP	3.3.3.1	4.4.4.4	Auto Assign	Auto Assign	Edit Delete

< **1** > 10/page Total 2

1 Web-based Configuration Guide

Firewall Management


After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

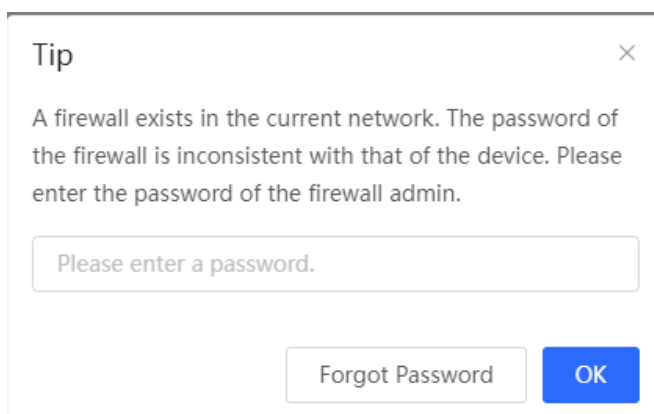

A screenshot of a 'Tip' dialog box. The title bar says 'Tip' with a close button (X). The main text reads: 'A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.' Below the text is a text input field with the placeholder text 'Please enter a password.'. At the bottom, there are two buttons: 'Forgot Password' and 'OK'.

7.5 Website Management

7.5.1 Overview

Website management consists of website grouping and website filtering. Website grouping refers to the classification of website URLs. You can modify existing website groups or create new website groups. Website filtering refers to access control to existing website groups to prohibit user access to websites in specific groups. Website filtering can be applied based on the specified user group and time range. For example, employees in the office network are prohibited from accessing game websites during work periods to improve network security.

7.5.2 Configuration Steps

Choose **Local Device > Behavior > Website Management**.

1. Configuring Website Groups

Choose **Local Device > Behavior > Website Management > Website Group**.

Click the **Website Group** tab. On the page that appears, all the created website groups are displayed in the list. Find the target group and click **More** in the **Member** column to view all the website URLs in the group. Find the target group and click **Edit** in the **Action** column to modify the member website URLs in the group. Find the target group and click **Delete** in the **Action** column to delete the group.

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.


Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Click **Add** to create a new website group.

 **Caution**

If a website filtering rule in a website group is being referenced, the group cannot be deleted from the website group list. To delete this group, modify the website filtering configuration to remove the reference relationship first.

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Website Filtering [Website Group](#)

Website Group ?

The group member can be a complete URL (example: www.baidu.com) or a domain (example: *.56.com).

Up to **20** entries can be added.

<input type="checkbox"/>	Group Name	Member	Action
<input type="checkbox"/>	Games	duowan.com... More	Edit Delete
<input type="checkbox"/>	Finance	*.10jqka.com.cn... More	Edit Delete
<input type="checkbox"/>	Social	*.baihe.com... More	Edit Delete
<input type="checkbox"/>	Shopping	*.taobao.com... More	Edit Delete
<input type="checkbox"/>	Life	*.55bbs.com... More	Edit Delete

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Add Group ×

* Group Name

* Member

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Table 7-5 Website group configuration

Parameter	Description
Group Name	Configure a unique name for the website group. The name can be a string of 1 to 64 characters.
Member	Specify members in the website group. You can enter multiple websites in a batch. The group member can be complete URL (such as www.baidu.com) or keywords in the URL (domain name with a wildcard in front, such as *.baidu.com). The wildcard can only appear at the beginning of a URL, and it cannot be in the middle or end of the domain name.

2. Configuring Website Filtering

Choose **Local Device > Behavior > Website Management > Website Filtering**.

Click the **Website Filtering** tab. On the page that appears, all the created website filtering rules are displayed in the list. Click **Edit** to modify the rule information. Click **Delete** to delete the specific filtering rule.

Click **Add** to create a website filtering rule.

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Forgot Password OK

[Website Filtering](#)

Website Group

i Website Filtering ?

Website Filtering + Add Delete Selected

Up to **20** entries can be added.

<input type="checkbox"/>	IP Address Group	Control Type	Blocked Website	Time	Status	Remark	Action
<input type="checkbox"/>	test user i	Your request is forbidden.	Games	test 📅	Enable 🔄	test	Edit Delete

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Please enter a password.

Forgot Password OK

Add Website Filtering ×

IP Address Group

Time

* Blocked Website

Remark

Status

Cancel

OK

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Table 7-1 Table 7-6 Website filtering rule configuration

Parameter	Description
Type	<ul style="list-style-type: none">● User Group: The policy is applicable to users in the specified user group. Please select the target user group.● Custom: The policy is applicable to users in the specified IP range. Please manually enter the managed IP range.
User Group	Select the users managed by the policy from the list of user groups. For the configuration of the user group list, see Section 6.2 User Management . If all members in the user group are selected, the policy takes effect for the user group and is also valid for new members added to this group.
IP Address Group	If the IP range is restricted by the APP control policy and the type of the policy is set to Custom , please enter the IP range manually.

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Parameter	Description
Time	Specify the time range under website filtering control. In the specified time range, managed clients cannot access the prohibited websites. You can select a time range defined in Section 7.3 Time Management from the drop-down list box, or select Custom and manually enter the specific time range.
Blocked Website	Configure the type of websites to block. You can select an existing website group. After a website group is selected, users are prohibited from accessing all websites in this group. For details on how to create or modify a website group, see Configuring Website Groups .
Remark	Enter the rule description.
Status	Specify whether to enable the website filtering rule.

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.



A screenshot of a 'Tip' dialog box. The title bar says 'Tip' with a close button (X). The main text reads: 'A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.' Below the text is a text input field with the placeholder text 'Please enter a password.'. At the bottom, there are two buttons: 'Forgot Password' and 'OK'.

7.6 Flow Control

7.6.1 Overview

Flow control is a mechanism that classifies flows based on certain rules and processes flows using different policies based on their categories. You can configure flow control to guarantee key flows and suppress malicious flows. You can enable flow control when the bandwidth is insufficient or flows need to be distributed properly.

7.6.2 Smart Flow Control

1. Overview

When you need to limit the uplink traffic and downlink traffic bandwidth of the device ports (such as WAN and WAN 1), you can enable the smart flow control function. After the line bandwidth is configured for a port, the uplink and downlink traffic of the port will be limited within the specified range. In addition, the per user bandwidth should be intelligently adjusted according to the number of users to ensure that users fairly share the bandwidth.

2. Configuration Steps

Choose **Local Device > Behavior > Flow Control > Smart Flow Control**.

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Turn on **Enable** on the **Smart Flow Control** tab and set the line bandwidth based on the bandwidth actually allocated by the ISP. If the device has multiple lines, you can set the bandwidth for these WAN ports separately. For details on the multi-line configuration, see Section [3.2 Configuring the WAN Ports](#).

Click **Save** to make the configuration take effect.

Caution

Enabling flow control will affect network speed testing. If you want to test the network speed, disable flow control first.

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Smart Flow Control Custom Policy Application Priority

Smart Flow Control
Adjust the bandwidth allocated to each user according to the user count.

Enable **If you want to test the WAN rate, please disable smart flow control first.**

WAN Bandwidth * Up Mbps * Down Mbps

WAN1 Bandwidth * Up Mbps * Down Mbps

WAN2 Bandwidth * Up Mbps * Down Mbps

Table 7-7 Smart flow control configuration

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Parameter	Description
Enable	Specify whether to enable the smart flow control function. By default, smart flow control is disabled.
WAN Bandwidth	Set the uplink and downlink bandwidth limits for the WAN ports, in Mbit/s.

Note

Smart flow control can be used to control the line traffic in different networking modes, including bandwidth-based, static IP address, and dynamic IP address.

7.6.3 Custom Policies

1. Overview

Custom policies are used to restrict the traffic with specific IP addresses based on the smart flow control function, thereby meeting the bandwidth requirements of specific users or servers. When you create a custom flow control

1 Web-based Configuration Guide

Firewall Management


After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

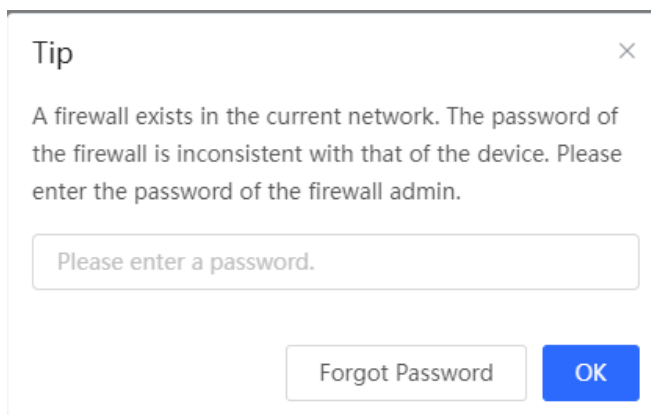

A tip dialog box with a close button (X) in the top right corner. The text inside reads: "A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin." Below the text is a text input field with the placeholder text "Please enter a password.". At the bottom of the dialog are two buttons: "Forgot Password" and "OK".

policy, you can flexibly configure the limited user range, the bandwidth limit, the limited application traffic, and the rate limit mode. When a custom policy is enabled, it takes precedence over the smart flow control configuration.

Custom policies are classified into normal policies, MACC policies, and VPN policies based on their application scope.

- Normal policies are used to control common traffic.
- VPN policies are used to control VPN traffic.
- MACC policies are flow control policies configured on the cloud. The Web management page only displays the policies. Users cannot modify MACC policies on the Web management page. To modify an MACC policy, log in to the MACC.

2. Getting Started

Before you configure a custom policy, enable smart flow control first. For details, see Section [7.6.2 Smart Flow Control](#).

3. Configuration Steps

Choose **Local Device > Behavior > Flow Control > Custom Policy**.

- (1) Set **Policy Type**.

1 Web-based Configuration Guide

Firewall Management


After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information


You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

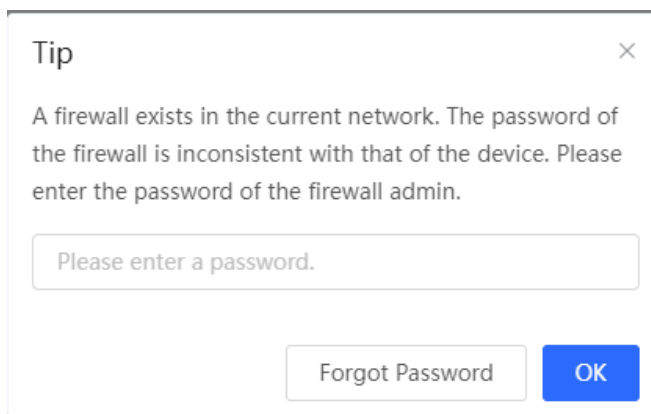

A tip dialog box with a close button (X) in the top right corner. The text inside reads: "A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin." Below the text is a text input field containing the placeholder text "Please enter a password.". At the bottom of the dialog are two buttons: "Forgot Password" and "OK".

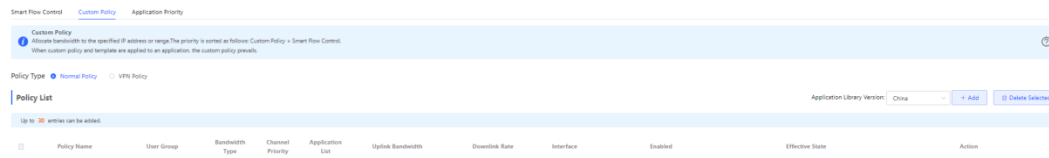

Note

The **Cloud Policy** option is displayed in **Policy Type** only after a MACC policy is configured on the MACC.

- (2) Switching the Application Library

The application lists vary in different regions. The Chinese and International versions of the application library are provided. Please select the version based on the regions.

Click to select Application Library Version and click OK. The version is switched after a few minutes.

Click to select **Application Library Version** and click **OK**. The version is switched after a few minutes.

Caution

- It takes about one minute to switch the application library version. Please wait.
- If you switch the application library, the template of the application priority will be reset (See Section [6.6.4 Application Priority](#) for details.), and the old application control policy may be inactive (See Section [6.4 App Control](#) for details.). Please proceed with caution.

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Smart Flow Control [Custom Policy](#) Application Priority

Custom Policy

Allocate bandwidth to the specified IP address or range. The priority is sorted as follows: Custom Policy > Smart Flow Control. When custom policy and template are applied to an application, the custom policy prevails.

Policy List

Up to 30 entries can be added. 1 entries are already added.

<input type="checkbox"/>	Policy Name	IP / IP Range	Bandwidth Type	Channel	Application List	Uplink Rate	Downlink Rate	Interface	Status	Effective State	Action
<input type="checkbox"/>	test	1.1.1.1-1.1.1.1	Shared	4	All Applications	No Limit	No Limit	WAN	Enable	Active	Edit Delete

- (4) Set a custom policy.
 - Set a custom normal policy.
 - a Set **Policy Type** to **Normal Policy** and click **Add** to create a custom normal flow control policy. A maximum of 30 custom normal policies can be configured.

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Please enter a password.

Forgot Password OK

Add ×

* Policy Name

Type User Group Custom

* User Group ?

Bandwidth Type Shared Independent

Application All Applications Custom

Channel Priority ?

Bandwidth Limit Limit Kbps No Limit

Uplink Bandwidth * CIR * PIR ?

Downlink Rate * CIR * PIR ?

* Interface

Enabled

Cancel

OK

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

- b Configure items related to a normal policy.

Parameter	Description
Policy Name	A policy name uniquely identifies a custom flow control policy. It cannot be modified.
Type	The type of a flow control policy can be set to the following: <ul style="list-style-type: none">● User Group: Indicates that the policy is applied to users in a specified user group. You need to select a user group to be managed.● Custom: Indicates that the policy is applied to users in a specified IP address segment. You need to manually enter the IP address range to be managed.
User Group	Select a user to be managed by the policy from the user group list. For details about how to set the user group list, see 7.2 User Management . If you select all members of a user group, the policy takes effect on the entire user group (it also takes effect on members added to the user group later).

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information


You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

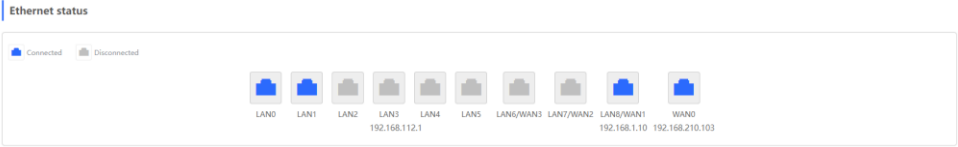Parameter	Description
IP/IP Range	<p>Specify the IP address range for the flow control policy to take effect. When Type is set to Custom, enter the IP address manually. You can enter a single IP address or an IP address segment.</p> <p>The IP address range must be within a LAN segment. You can choose Overview > Ethernet status to check the network segment of the current LAN port. For example, the network segment of the LAN port shown in the figure below is 192.168.110.0/24.</p>  <p>The diagram shows the Ethernet status of various ports. LAN0 and LAN1 are connected (blue icons), while LAN2 through LAN5 are disconnected (grey icons). LAN3 has the IP address 192.168.112.1. LAN6/WAN3, LAN7/WAN2, LAN8/WAN1, and WAN0 are also connected (blue icons). LAN8/WAN1 has the IP address 192.168.1.10, and WAN0 has the IP address 192.168.210.103.</p>
Bandwidth Type	<ul style="list-style-type: none">● Shared: Indicates that all users in a user group (all IP addresses in an address range) share the configured uplink and downlink bandwidths, and the bandwidth of a single user is not limited.● Independent: Indicates that all users in a user group (all IP addresses in an address range) share the configured uplink and downlink bandwidths, and the maximum bandwidth of a single user can be limited.

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Parameter	Description
Application	<p>When Bandwidth Type is set to Shared, the flow control policy can be configured to take effect only on specified applications.</p> <ul style="list-style-type: none">● All Applications: Indicates that the flow control policy takes effect on all applications in the current application library.● Custom: Indicates that the flow control policy takes effect only on specified applications in the application list. <p>When Bandwidth Type is set to Independent, some models do not support application selection and the flow control policy takes effect on all applications in the current application library by default.</p> <p>For the models, contact technical support engineers.</p>
Application List	<p>When Application is set to Custom, it specifies the applications, on which the policy takes effect. The traffic of the selected applications is subject to the policy.</p>

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Parameter	Description
Channel Priority	<p>Specify the traffic guarantee level. The value range is from 0 to 7. A smaller value indicates a higher priority and the value 0 indicates the highest priority.</p> <p>Different traffic priority values correspond to different application groups in an application template. 2 indicates the key group, 4 indicates the normal group, and 6 indicates the suppression group. For the description of application groups in a priority template, see 7.6.4.</p>
Bandwidth Limit	<p>Configure whether to limit the bandwidth.</p> <ul style="list-style-type: none">● Limit Kbps: You can set the uplink and downlink bandwidth limits as required.● No Limit: When the bandwidth is sufficient, the used maximum bandwidth is not limited. When the bandwidth is insufficient, the minimum bandwidth cannot be guaranteed.
Uplink Bandwidth Downlink Rate	<p>Configure the data transmission rate in uploading and downloading, in Kbps. It includes CIR, PIR, and PIR per User.</p> <ul style="list-style-type: none">● CIR: Specifies the minimum bandwidth that can be shared by all users when the bandwidth is insufficient.● PIR: Specifies the total maximum bandwidth that can be occupied by all users when the bandwidth is sufficient.● PIR per User: Specifies the maximum bandwidth that can be occupied by each user when multiple users share the bandwidth. It is optional and can be configured only when Bandwidth Type is set to Independent. The rate is not limited by default.

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Parameter	Description
Interface	Specify the WAN port, on which the policy takes effect. When it is set to All WAN Ports , the policy will be applied to all WAN ports.
Enabled	Set whether to enable the flow control policy. If it is disabled, the policy does not take effect.

Caution

After switching the application library version, you may need to reconfigure the application list.

- Click **OK**.
- Set a custom VPN policy.
 - Set **Policy Type** to **VPN Policy** and click **Add** to create a custom VPN flow control policy. A maximum of 10 VPN policies can be configured.

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Please enter a password.

Add ×

* Policy Name

Type User Group Custom

* User Group ?

Effective User Internal IP/User External IP/External User

Application All Applications Custom

Max Uplink Rate per
User

Max Downlink Rate
per User

* Interface

Enabled

Cancel

OK

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

- d Configure items related to a VPN policy.

Parameter	Description
Policy Name	A policy name uniquely identifies a custom flow control policy. It cannot be modified.
Type	The type of a flow control policy can be set to the following: <ul style="list-style-type: none">● User Group: Indicates that the policy is applied to users in a specified user group. You need to select a user group to be managed.● Custom: Indicates that the policy is applied to users in a specified IP address segment. You need to manually enter the IP address range to be managed.
User Group	Select a user to be managed by the policy from the user group list. For details about how to set the user group list, see 7.2 User Management . If you select all members of a user group, the policy takes effect on the entire user group (it also takes effect on members added to the user group later).

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Parameter	Description
Effective User	<p>Specify the type of effective users. It can be set to the following:</p> <ul style="list-style-type: none">● Internal IP/User: For a gateway, IP addresses of clients connected to the gateway are internal IP addresses.● External IP/External User: For a gateway, non-gateway internal IP addresses are external IP addresses. <p>The configuration suggestions are as follows:</p> <ul style="list-style-type: none">● When clients are configured to control VPN traffic, select Internal IP/ User to control the traffic of internal network users. When the VPN server is configured to control the VPN traffic, select External IP/External User to control the traffic of external network users.● For the VPN of the NAT model, the external IP address of the server must be in the IP address segment of the VPN address pool.● For the VPN in router mode, the IP address segment must be set to IP addresses of restricted users. For the VPN in router mode, to configure flow control on internal IP addresses of clients, set internal IP addresses to the IP addresses of the flow control objects. <p>Note: The external IP address configured by the Open VPN server is the IP address of the address pool. The internal IP address configured by the client is the actual IP address of the client.</p>

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Parameter	Description
Application	<p>When Bandwidth Type is set to Shared, the flow control policy can be configured to take effect only on specified applications.</p> <ul style="list-style-type: none">● All Applications: Indicates that the flow control policy takes effect on all applications in the current application library.● Custom: Indicates that the flow control policy takes effect only on specified applications in the application list. <p>When Bandwidth Type is set to Independent, some models do not support application selection and the flow control policy takes effect on all applications in the current application library by default.</p> <p>For the models, contact technical support engineers.</p>
Application List	<p>When Application is set to Custom, it specifies the applications, on which the policy takes effect. The traffic of the selected applications is subject to the policy.</p>
Max Uplink Rate per User	<p>Configure the maximum data transmission rates of each user in uploading and downloading when multiple users share the bandwidth. The unit is Kbps.</p>
Max Downlink Rate per User	<p>It is optional and can be configured only when Bandwidth Type is set to Independent. The rate is not limited by default.</p>

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Parameter	Description
Interface	Specify the VPN port, on which the policy takes effect. When it is set to All VPN Ports , the policy is applied to all traffic of the VPN type.
Enabled	Set whether to enable the flow control policy. If it is disabled, the policy does not take effect.

- a Click **OK**.

- (3) View Custom Policies

The current custom policies are displayed in the **Policy List** section. You can modify and delete a custom policy. To delete multiple custom policies in a batch, select the desired policies and click **Delete Selected**.

- Normal policy list

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Forgot Password OK

Smart Flow Control [Custom Policy](#) Application Priority

Custom Policy
Allocate bandwidth to the specified IP address or range. The priority is sorted as follows: Custom Policy > Smart Flow Control. When custom policy and template are applied to an application, the custom policy prevails.

Policy List + Add Delete Selected

Up to 30 entries can be added. 1 entries are already added.

<input type="checkbox"/>	Policy Name	IP / IP Range	Bandwidth Type	Channel	Application List	Uplink Rate	Downlink Rate	Interface	Status	Effective State	Action
<input type="checkbox"/>	test	1.1.1.1-1.1.1.1	Shared	4	All Applications	No Limit	No Limit	WAN	Enable	Active	Edit Delete

● VPN policy list

Policy Type Normal Policy VPN Policy Cloud Policy

Policy List Application Library Version: China + Add Delete Selected

Up to 10 entries can be added. 3 entries are already added.

<input type="checkbox"/>	Policy Name	User Group	Application List	Uplink Bandwidth	Downlink Rate	Interface	Enabled	Effective State	Match Order	Action
<input type="checkbox"/>	PPTP_SERVER_74624	1.1.1.1-255.255.255.255	All Applications	PIR per User No Limit	PIR per User No Limit	PPTP	Disable	Inactive	↓	Edit Delete
<input type="checkbox"/>	L2TP_SERVER_49952	1.1.1.1-255.255.255.255	All Applications	PIR per User No Limit	PIR per User No Limit	L2TP	Disable	Inactive	↑ ↓	Edit Delete
<input type="checkbox"/>	OPENVPN_SERVER_15522	1.1.1.1-255.255.255.255	All Applications	PIR per User No Limit	PIR per User No Limit	OpenVPN	Disable	Inactive	↑	Edit Delete

Table 7-8 Policy list information

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Parameter	Description
Application List	The Application List contains the applications to which the policy is valid. If the Application Library matches with the Application that is set to Custom and supported by the policy, Custom is displayed in the Application List . If not, Custom is displayed.
Status	Indicate whether the current policy is enabled. You can click to edit the status. If the Application Library does not match with the Application that is set to Custom and supported by the policy, you cannot edit the Status directly. Please click Edit in the action bar to edit the policy or switch the application library.
Effective State	Indicate whether the policy is effective in the current system. If Inactive is displayed, check whether the policy is enabled, whether the policy-enabled port exists, and whether the Application Library matches with the Application to which the policy is valid.

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information



You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Parameter	Description
Match Order	All the created custom policies are displayed in the policy list, with the latest policy listed on the top. The device matches the policies according to their sorting in the list. You can manually adjust the policy matching sequence by clicking  or  in the list.
Action	You can modify and delete the custom policy.

7.6.4 Application Priority

1. Overview

After smart flow control is enabled, you can set the application priority to provide guaranteed bandwidth to applications with high priority and suppress the bandwidth for applications with low priority. You can predefine a list of applications whose bandwidth needs to be guaranteed preferentially and a list of applications whose bandwidth needs to be suppressed based on actual needs.

1 Web-based Configuration Guide

Firewall Management


After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

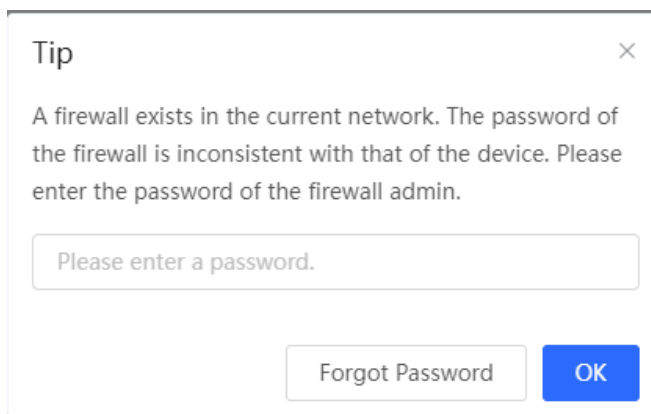

A screenshot of a 'Tip' dialog box. The title bar says 'Tip' with a close button (X). The main text reads: 'A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.' Below the text is a text input field with the placeholder text 'Please enter a password.'. At the bottom, there are two buttons: 'Forgot Password' and 'OK'.

Caution

If one application exists in both the custom policy list and the application priority list, the custom policy prevails.

2. Getting Started

- Before you configure application priority, enable smart flow control first. For details, see Section [7.6.2 Smart Flow Control](#).
- Confirm that the appropriate application library is selected on the **Custom Policy** page (See Section [6.6.3 Custom Policies](#) for details.).

3. Configuration Steps

Choose **Local Device > Behavior > Flow Control > Application Priority**.

- (1) Create an application priority template.

Select a template from the **Application Priority** drop-down list box.

Four application priority templates are predefined to meet the needs in different scenarios. You can switch among the templates based on actual needs.

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Smart Flow Control

Custom Policy

Application Priority

Application Priority



Changing the application priority will reset the application group list.

Application priority: Key Group > Block Group

Application Priority

Default ^

Default

Office

Home

Entertainment

The application priority templates are as follows:

- **Default:** This template is used during device initialization. The traffic bandwidth is not guaranteed or suppressed for any application.
- **Office:** This template is designed for the office scenario, where the application traffic from the office network

1 Web-based Configuration Guide

Firewall Management


After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

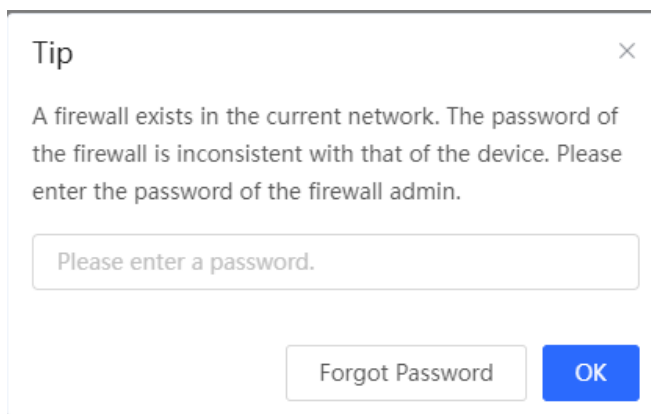

A screenshot of a 'Tip' dialog box. The dialog has a title bar with the word 'Tip' and a close button (X). The main text reads: 'A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.' Below the text is a text input field with the placeholder text 'Please enter a password.'. At the bottom of the dialog are two buttons: 'Forgot Password' and 'OK'.

is guaranteed preferentially.

- **Home:** This template is designed for the home scenario, where the application traffic from the home network is guaranteed preferentially.
- **Entertainment:** This template is designed for the entertainment scenario, where the application traffic from the entertainment network is guaranteed preferentially.

- (2) Create an application group list.

Each default template has three application groups: key group, block group, and normal group. The application priority of the three groups decreases in the following order: key group, normal group, and block group.

- **Key Group:** The traffic from applications in the application list for this group is guaranteed preferentially.
- **Block Group:** The traffic from applications in the application list for this group is suppressed to preferentially guarantee the traffic from applications with higher priority.
- **Normal Group:** All the applications in the application library beyond the key group and block group are in this group. The traffic from applications in this group are guaranteed after that from the key group.

After you select a template, three application groups **Key Group**, **Block Group**, and **Normal Group** and the application list for each group in the current template are displayed. You can click **More** to view the details of each application list.

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.


- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

You can click **Edit** in the **Action** column next to the key group and block group to edit the application list for the groups, allowing the traffic from these applications to be guaranteed or suppressed.

Smart Flow Control Custom Policy Application Priority

Application Priority
 **Changing the application priority will reset the application group list.**
Application priority: Key Group > Block Group

Application Priority ▼

Application Group List

Group Name	Application List	Action
Key Group	Communication	Edit
Block Group	Play... More Application List(2) <input type="button" value="Play"/> <input type="button" value="Video"/>	Edit
Normal Group	Other	Edit

1 Web-based Configuration Guide

Firewall Management


After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information


You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

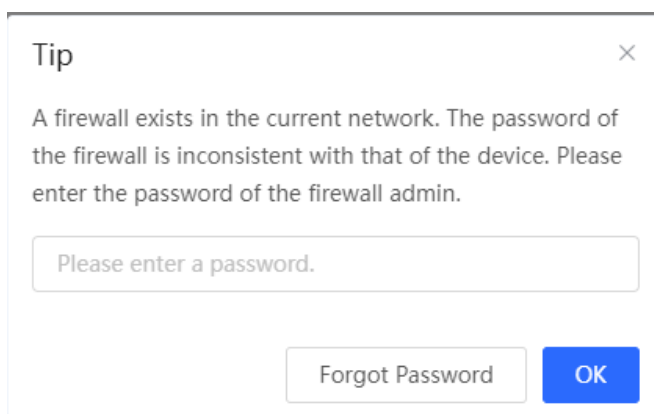

A dialog box titled "Tip" with a close button (X) in the top right corner. The text inside reads: "A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin." Below the text is a text input field containing the placeholder text "Please enter a password.". At the bottom of the dialog are two buttons: "Forgot Password" and "OK".

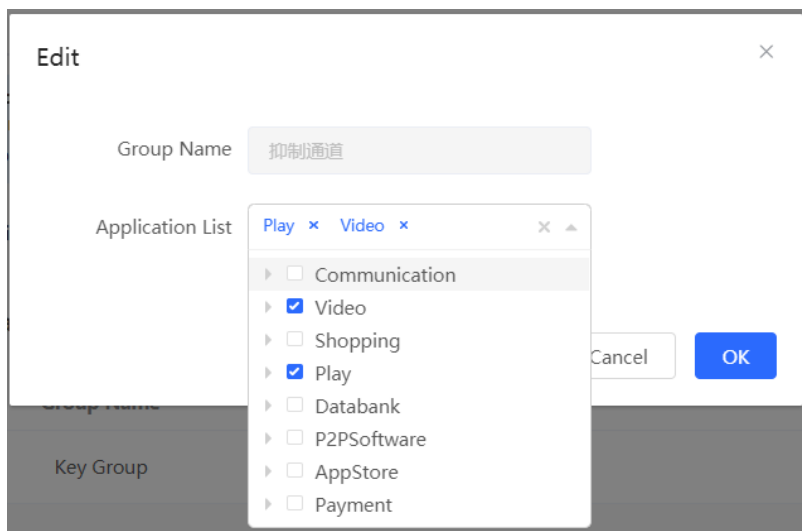

An "Edit" dialog box with a close button (X) in the top right corner. It contains a "Group Name" field with the value "抑制通道". Below it is an "Application List" section. A dropdown menu is open, showing a list of application categories with checkboxes: Communication, Video (checked), Shopping, Play (checked), Databank, P2PSoftware, AppStore, and Payment. The "Application List" field above the dropdown shows "Play" and "Video" as selected items. At the bottom right of the dialog are "Cancel" and "OK" buttons.

Caution

- If you switch the application library, the application list will change.
- The application list will be reset after you switch the application priority template.

1 Web-based Configuration Guide

Firewall Management


After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

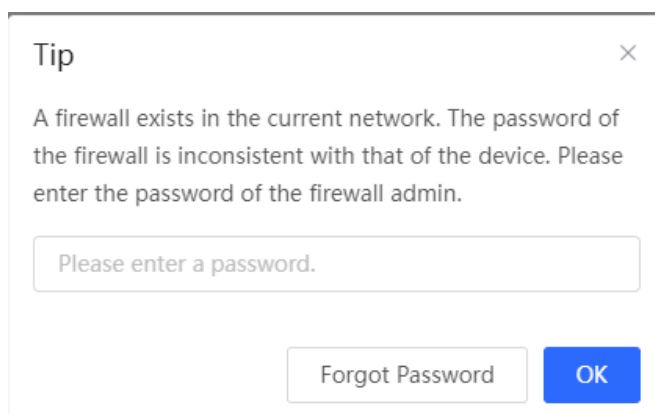

A tip dialog box with a close button (X) in the top right corner. The text inside reads: "A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin." Below the text is a text input field containing the placeholder text "Please enter a password.". At the bottom of the dialog are two buttons: "Forgot Password" and "OK".

7.7 Access Control

7.7.1 Overview

The access control function matches data packets passing through the device based on specific rules and permits or drops data packets in the specified time range. This function controls whether to permit LAN user access to the Internet and whether to block a specific data flow. The device matches packets based on the MAC address or IP address.

7.7.2 Configuration Steps

Choose **Local Device > Behavior > Access Control**.

The access control rule list displays the created access control rules. Click **Add** to add an access control rule.

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

ACL
Configure ACL based on IP addresses. **Reverse flow mismatches** .
The policy cannot take effect on the WAN port to block the traffic among the internal users between an L2TP server and an L2TP client. The policy only takes effect in the LAN network.

i Example: **Configure a deny ACL entry containing source IP address 192.168.1.0/24 and destination IP address 192.168.2.0/24.** Device configured with IP address 192.168.1.x will fail to access device 192.168.2.x. **But device 192.168.2.x will be allowed to access device 192.168.1.x.**

Tip: Configure one more deny ACL entry containing source IP address 192.168.2.0/24 and destination IP address 192.168.1.0/24. The two devices will be mutually unreachable.

ACL List + Add Delete Selected

Up to 50 entries can be added.

<input type="checkbox"/>	Rule	Control Type	Wireless Schedule	Interface	Effective State	Remark	Match Order	Action
<input type="checkbox"/>	Src IP Address 192.168.1.1/24 : 20 Dest IP Address 192.168.2.2 : 30 Protocol TCP	Block	test	WAN	Inactive ⚠		↓	Edit Delete
<input type="checkbox"/>	MAC 11:11:11:11:11:11	Block	All Time	WAN	Active		↑	Edit Delete

Table 7-9 Access control rule information

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information




You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Parameter	Description
Effective State	Indicate whether the rule takes effect. If Inactive is displayed, the current system time may not in the effective time range. Move the cursor to  to view the detailed cause.
Match Order	All the created ACL rules are displayed in the ACL list, with the latest rule listed on the top. The device matches the rules according to their sorting in the list. You can manually adjust the rule matching sequence by clicking  or  in the list.
Action	You can modify and delete a rule.

1. Configuring a MAC Address-based ACL Rule

MAC address-based ACL rules enable the device to match data packets based on the source MAC address, and are generally used to control Internet access from online users or specific clients.

Set **Based on MAC**, enter the MAC address of the client, select a rule type, set the effective time range, and click **OK**.

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Note

MAC address-based ACL rules are valid on WAN ports by default.

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Please enter a password.

Add Rule ×

Based on MAC IP

* MAC

Control Type

Wireless Schedule

Remark

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Table 7-10 MAC address-based ACL configuration

Parameter	Description
MAC	Enter the client MAC address to be controlled by the ACL rule. After you click the input field, the current client information is displayed. You can click to automatically enter the corresponding MAC address.
Control Type	Specify the method for processing data packets matching the conditions. <ul style="list-style-type: none">● Allow: Permit the data packets matching the conditions.● Block: Drop the data packets matching the conditions.
Wireless Schedule	You can select a time range defined in Section 7.3 Time Management from the drop-down list box, or select Custom and manually enter the specific time range.
Remark	Enter the rule description, which is used to uniquely identify a rule.

2. Configuring an IP Address-based ACL Rule

IP address-based ACL rules enable the device to match data flows according to the source IP address, destination IP address, and protocol number.

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Set **Based on IP**, enter the source IP address and port and destination IP address and port of the data flow, select the protocol type, rule type, effective time range, and effective port, and click **OK**.

Caution

IP address-based ACL rules are effective in only one direction. For example, in a block rule, the source IP address segment is 192.168.1.0/24 and the destination IP address segment is 192.168.2.0/24. According to this rule, the device with the IP address 192.168.1.x cannot access the device with the IP address 192.168.2.x, but the device with the IP address 192.168.2.x can access the device with the IP address 192.168.1.x. To block bidirectional access in this network segment, you need to configure another block rule with the source IP address segment 192.168.2.0/24 and destination IP address segment 192.168.1.0/24.

L2TP/PPTP VPN supports only IP address-based access control and the effective ports must be in the LAN.

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Please enter a password.

Add Rule ×

Based on MAC IP

Src IP Address: Port :

Dest IP Address: Port :

Protocol Type ▼

Control Type ▼

Wireless Schedule ▼

Interface ▼

Remark

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Table 7-11 IP address-based ACL configuration

Parameter	Description
Src IP Address: Port	Enter the source IP address and port number for data packet matching. If this parameter is not specified, the device matches all the IP addresses and port numbers. The source IP address can be a single IP address (such as 192.168.1.1) or an IP address range (such as 192.168.1.1/24).
Dest IP Address: Port	Enter the destination IP address and port number for data packet matching. If this parameter is not specified, the device matches all the IP addresses and port numbers. The destination IP address can be a single IP address (such as 192.168.1.1) or an IP address range (such as 192.168.1.1/24).
Protocol Type	Specify the protocol type for data packet matching. The options are TCP , UDP , and ICMP .

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Parameter	Description
Control Type	Specify the method for processing data packets matching the conditions. <ul style="list-style-type: none">● Allow: Permit the data packets matching the conditions.● Block: Drop the data packets matching the conditions. This rule is valid only in one direction, and does not block the reverse flow.
Wireless Schedule	You can select a time range defined in Section 7.3 Time Management from the drop-down list box, or select Custom and manually enter the specific time range.
Interface	Select the port on which the rule applies. <ul style="list-style-type: none">● LAN: The rule takes effect on a LAN port to control data packets to the LAN.● WAN: The rule takes effect on a WAN port to control data packets received from or sent to the Internet.
Remark	Enter the rule description, which is used to uniquely identify a rule.

7.8 Online User Management

Choose **Clients > Online Clients**.

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

You can view the wired users and wireless users in the current network. Find the target online user and click **Go** in the **Access Control** column to create an ACL rule for the user, to control the online behavior and networking time range of the user client. For details on how to configure an ACL rule, see Section [7.7](#).

All (2) Wired (2) Wireless (0)

Online Clients ?

The client going offline will not disappear immediately. Instead, the client will stay in the list for three more minutes.

Online Clients

Username/Type	Access Location	IP/MAC	Current Rate	Wi-Fi	Access Control
E <input type="button" value="Wired"/>	1234567891234	192.168.110.105 00:d0:c8:75:a8:49	Up:350.00bps Down:497.00bps	--	<input type="button" value="Go"/>
* <input type="button" value="Wired"/>	1234567891234	192.168.110.92 14:49:bc:16:36:92	Up:4.79Kbps Down:6.14Kbps	--	<input type="button" value="Go"/>

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Table 7-12 Online user information

Parameter	Description
Username/Type	Indicate the name and access type of the client. The access type can be Wireless or Wired .
Access Location	Indicate the SN of the device to which the client connects in wired or wireless mode.
IP/MAC	Indicate the IP address and MAC address of the client.
Current Rate	Indicate the current uplink and downlink data transmission rates.
Wi-Fi	Indicate the wireless signal information displayed when Username/Type is set to Wireless . The information includes the channel, signal strength, online duration, and negotiated rate.

1 Web-based Configuration Guide

Firewall Management

After a firewall is added to the network, you can manage and configure the firewall on the Web management system.

1.1 Viewing Firewall Information

You can view the basic information and license of the firewall on the Web management system.

Choose **Network > Firewall**.

- (1) If the password of the firewall is inconsistent with that of the gateway, please enter the management password of the firewall and click **OK**.

Tip ×

A firewall exists in the current network. The password of the firewall is inconsistent with that of the device. Please enter the password of the firewall admin.

Please enter a password.

Forgot Password OK

Add Rule ×

Based on MAC IP

* MAC

Control Type

Wireless Schedule

Remark

Cancel

OK

8 VPN

8.1 Configuring IPsec VPN

8.1.1 Overview

1. IPsec Overview

IP Security (IPsec) is a Layer 3 tunnel encryption protocol defined by the IETF. IPsec is used to provide end-to-end encryption and verification services in the network to provide high quality and interoperability for data transmission over the network and ensure transmission security by using cryptographic algorithms. The communicating parties obtain the following security services at the IP layer through encryption and data source authentication:

- Confidentiality: The IPsec sender encrypts packets before transmitting the packets over the network.
- Data integrity: The IPsec receiver authenticates packets received from the sender to ensure that data is not tampered with during the transmission.
- Data authentication: The IPsec receiver authenticates whether the sender of IPsec packets is valid.
- Anti-replay: The IPsec receiver detects and denies expired or repeated packets.

The IPsec protocol is widely used for communication between the HQ and branches of an organization. Currently, the device can be deployed as the IPsec server or client. A secure tunnel is established between the HQ and each branch based on the IPsec protocol to ensure the confidentiality of data transmission and improve network security.

2. IKE Overview

IPsec provides secure communication between two endpoints, which are called IPsec peers. Security Association (SA) is the establishment of shared security attributes between the peers to support secure communication. An SA may include attributes such as: security protocol used by the peers, characteristics of data flows to be protected, encapsulation mode of data transmitted between the peers, encryption and authentication algorithms, keys for secure data conversion and transmission, and the SA lifetime. When you configure IPsec, you can use the Internet Key Exchange (IKE) protocol to establish an SA. IKE provides automatically negotiated keys for establishing and maintaining SAs, simplifying IPsec usage and management.

3. IPsec Security Policy

IPsec security policies define security proposals (equivalent to SA) for data flows. You can configure matching security policies on both parties engaged in the communication to establish IPsec tunnels between the IPsec client and the IPsec server, protecting the communication data. An IPsec security policy consists of two parts: basic settings and advanced settings. Advanced settings are optional and include the specific IKE policy and connection policy. You can keep the default settings unless otherwise specified. For details, see the Configuration Steps below.

8.1.2 Configuring the IPsec Server

Choose **Local Device > VPN > IPsec > IPsec Security Policy**.

1. Basic Settings

Click **Add**. In the dialog box that appears, set **Policy Type** to **Server**, enter the policy name and local subnet range, set the pre-shared key, and click **OK**.

IPsec Security Policy IPsec Connection Status

IPsec Security Policy ⓘ ?
Note: Example: IP address/number of subnet mask bits.
Tip: If it is set to 192.168.110.x/24, the address range is from 192.168.110.1 to 192.168.110.254.

Policy List + Add

Up to 1 entries can be added.

Policy Type	Policy Name	Peer Gateway	Local Subnet	Peer Subnet	Status	Action
No Data						

Add ×

Policy Type Client Server

* Policy Name

Interface ?

* Local Subnet

* Pre-shared Key

Status

[1. Set IKE Policy](#)
[2. Connection Policy](#)

Table 8-1 IPsec server basic settings

Parameter	Description
Policy Name	Specify the name of the IPsec security policy. The name must be a string of 1 to 28 characters.
Interface	Select a local WAN port from the drop-down list box. The Peer Gateway parameter set for the communication peer (IPsec client) must use the IP address of the WAN port specified here. In the multi-line scenario, you are advised to set this parameter to Auto .
Local Subnet	Specify the local subnet address range for the data flows to be protected, that is, the LAN port network segment of the server. The value is the combination of IP address and subnet mask.
Pre-shared Key	Specify the same pre-shared key as the credential for authentication between communicating parties. For higher security, different peers must be configured with different pre-shared keys. That is, a pair of interface bound to the IPsec server and peer gateway of the IPsec client must be configured with the same unique pre-shared key.
Status	Specify whether to enable the security policy.

2. Advanced Settings (Phase 1)

Click **1. Set IKE Policy** to expand the configuration items. Keep the default settings unless otherwise specified.

1. Set IKE Policy

IKE Policy 1

IKE Policy 2

IKE Policy 3

IKE Policy 4

IKE Policy 5

Negotiation Main Mode Aggressive Mode

Mode

Local ID Type IP NAME

Peer ID Type IP NAME

* Lifetime

DPD Enable Disable

* DPD Interval

seconds

2. Connection Policy

Table 8-2 IPsec server IKE policy configuration

Parameter	Description
IKE Policy	<p>Select the hash algorithm, encryption algorithm, and Diffie-Hellman (DH) group ID used by the IKE protocol. An IKE policy is composed of the three parameters. You can set five sets of IKE policies. To ensure successful IKE negotiation, the two parties engaged in IKE negotiation must have at least one set of consistent IKE policy.</p> <ul style="list-style-type: none"> ● Hash algorithm: <ul style="list-style-type: none"> ○ sha1: SHA-1 algorithm ○ md5: MD5 algorithm ● Encryption algorithm: <ul style="list-style-type: none"> ○ des: DES algorithm using 56-bit keys ○ 3des: 3DES algorithm using 168-bit keys ○ aes-128: AES algorithm using 128-bit keys ○ aes-192: AES algorithm using 192-bit keys ○ aes-256: AES algorithm using 256-bit keys ● DH group ID: <ul style="list-style-type: none"> ○ dh1: 768-bit DH group ○ dh2: 1024-bit DH group ○ dh5: 1536-bit DH group
Negotiation Mode	<p>Select Main Mode or Aggressive Mode. The negotiation mode on the IPsec server and IPsec client must be the same.</p> <ul style="list-style-type: none"> ● Main Mode: Generally, this mode is applicable to communication between fixed public network IP addresses and point-to-point communication between devices. In this mode, the peer identity is authenticated to provide high security. ● Aggressive Mode: The public network IP addresses obtained by ADSL dial-up users are not fixed and a NAT device may exist. Therefore, the aggressive mode is used to implement NAT traversal. In this mode, you need to set the local and peer ID type to NAME as the IP address is not fixed. The aggressive mode does not authenticate the peer identity, so it has low security.
Local/Peer ID Type	<p>Specify the ID type of the local or peer device. The local ID type of the peer device must be the same as the peer ID type of the local device.</p> <ul style="list-style-type: none"> ● IP: The IP address is used as the identity ID. The IDs of the local and peer devices are generated automatically. ● NAME: The host character string is used as the identity ID. The IDs of the local and peer devices are generated automatically. When the IP address is not fixed, you need to set Local ID Type to NAME and modify the peer device settings accordingly. In this case, you also need to configure the host character string that is used as the identity ID.
Local/Peer ID	<p>When the local or peer ID type is set to NAME, you also need to host character string that is used as the identity ID. The local ID of the peer device must be the same as peer ID of the local device.</p>

Parameter	Description
Lifetime	Specify the lifetime of the IKE SA. (The negotiated IKE SA lifetime prevails.) You are advised to use the default value.
DPD	Specify whether to enable Dead Peer Detection (DPD) to detect the IPsec neighbor status. After DPD is enabled, if the receiver does not receive IPsec encrypted packets from the peer within the DPD detection interval, DPD query will be triggered and the receiver actively sends a request packet to detect whether the IKE peer exists. You are advised to configure DPD when links are unstable.
DPD Interval	Specify the DPD detection interval. That is, the interval for triggering DPD query. You are advised to keep the default setting.

3. Advanced Settings (Phase 2)

Click **2. Connection Policy** to expand the configuration items. Keep the default settings unless otherwise specified.

2. Connection Policy

Transform Set 1

Transform Set 2

Perfect Forward

Secrecy

* Lifetime

Table 8-3 IPsec server connection policy configuration

Parameter	Description
Transform Set	<p>Specify the set of security protocol and algorithms. During IPsec SA negotiation, the two parties use the same transform set to protect specific data flow. The transform set on the IPsec server and IPsec client must be the same.</p> <ul style="list-style-type: none"> ● Security protocol: The Encapsulating Security Payload (ESP) protocol provides data source authentication, data integrity check, and anti-replay functions for IPsec connections and guarantees data confidentiality. ● Verification algorithm: <ul style="list-style-type: none"> ○ sha1: SHA-1 HMAC ○ md5: MD5 HMAC ● Encryption algorithm: <ul style="list-style-type: none"> ○ des: DES algorithm using 56-bit keys ○ 3des: 3DES algorithm using 168-bit keys ○ aes-128: AES algorithm using 128-bit keys ○ aes-192: AES algorithm using 192-bit keys ○ aes-256: AES algorithm using 256-bit keys
Perfect Forward Secrecy	<p>Perfect Forward Secrecy (PFS) is a security feature that can guarantee the security of other keys when one key is cracked, because there is no derivative relationship among the keys. After PFS is enabled, temporary private key exchange is performed when an IKE negotiation is initiated using a security policy. If PFS is configured on the local device, it must also be configured on the peer device that initiates negotiation and the DH group specified on the local and peer devices must be the same. Otherwise, negotiation will fail.</p> <ul style="list-style-type: none"> ● none: Disable PFS. ● d1: 768-bit DH group ● d2: 1024-bit DH group ● d5: 1536-bit DH group <p>By default, PFS is disabled.</p>

8.1.3 Configuring the IPsec Client

Choose **Local Device > VPN > IPsec > IPsec Security Policy**.

Click **Add**. In the dialog box that appears, set **Policy Type** to **Client**, enter the policy name, peer gateway, local subnet range, and peer subnet range, set the pre-shared key, and click **OK**.

IPSec Security Policy IPSec Connection Status

IPSec Security Policy ?

Note: Example: IP address/number of subnet mask bits.
Tip: If it is set to 192.168.110.x/24, the address range is from 192.168.110.1 to 192.168.110.254.

Policy List + Add

Up to 1 entries can be added.

Policy Type	Policy Name	Peer Gateway	Local Subnet	Peer Subnet	Status	Action
No Data						

Add ×

Policy Type Client Server

* Policy Name

* Peer Gateway +

Interface ⌵ ?

* Local Subnet

* Peer Subnet +

* Pre-shared Key

Status

- 1. Set IKE Policy
- 2. Connection Policy

Table 8-4 IPsec client basic settings

Parameter	Description
Policy Name	Specify the name of the IPsec security policy. The name must be a string of 1 to 28 characters.
Peer Gateway	Enter the IP address or domain name of the peer device.

Parameter	Description
Interface	Select a WAN port used locally from the drop-down list box. In the multi-line scenario, you are advised to set this parameter to Auto .
Local Subnet	Specify the local subnet address range for the data flows to be protected, that is, the LAN port network segment of the server. The value is the combination of IP address and subnet mask.
Peer Subnet	Specify the peer subnet address range for the data flows to be protected, that is, the LAN port network segment of the client. The value is the combination of IP address and subnet mask.
Pre-shared Key	Configure the pre-shared key the same as that on the IPsec server.
Status	Specify whether to enable the security policy.

You can configure advanced parameters by referring to the corresponding settings on the IPsec server. For details, see [Advanced Settings \(Phase 1\)](#) and [Advanced Settings \(Phase 2\)](#).

8.1.4 Viewing the IPsec Connection Status

Choose **Local Device > VPN > IPsec > IPsec Connection Status**.

You can view the IPsec tunnel connection status on the current page.

IPsec Security Policy [IPsec Connection Status](#)

IPsec Connection Status Refresh

Name	SPI	Direction	Tunnel Endpoint	Flow	Status	Security Protocol	Algorithm
test	32569111 34	in	172.26.1.200<--172.26.30.192	192.168.120.0/24 <-- 192.168.110.0/24	OK	ESP	AH Authentication: -- ESP Authentication: SHA1 ESP Security: AES-128
test	32874839 13	out	172.26.1.200-->172.26.30.192	192.168.120.0/24 --> 192.168.110.0/24	OK	ESP	AH Authentication: -- ESP Authentication: SHA1 ESP Security: AES-128

Table 8-5 IPsec tunnel connection status information

Parameter	Description
Name	Indicate the security policy name on the IPsec server or client.
SPI	Indicate the Security Parameter Index (SPI) of the IPsec connection, used to associate the received IPsec data packets with the corresponding SA. The SPI of each IPsec connection must be unique.


Parameter	Description
Direction	Indicate the direction of the IPsec connection. The value in indicates inbound, and the value out indicates outbound.
Tunnel Client	Indicate the gateway addresses on two ends of the IPsec connection. The arrow indicates the direction of data flows to be protected by the current tunnel.
Flow	Indicate the subnet range on two ends of the IPsec connection. The arrow indicates the direction of data flows to be protected by the current tunnel.
Status	Indicate the IPsec tunnel connection status.
Security Protocol	Indicate the security protocol used by the IPsec connection.
Algorithm	Indicate the encryption algorithm and authentication algorithm used by the IPsec connection.

8.1.5 Typical Configuration Example

1. Networking Requirements

The HQ and branch of an enterprise are connected through the Internet. An IPsec tunnel needs to be established between the HQ gateway and branch gateway to ensure the confidentiality of transmitted data.

2. Networking Diagram

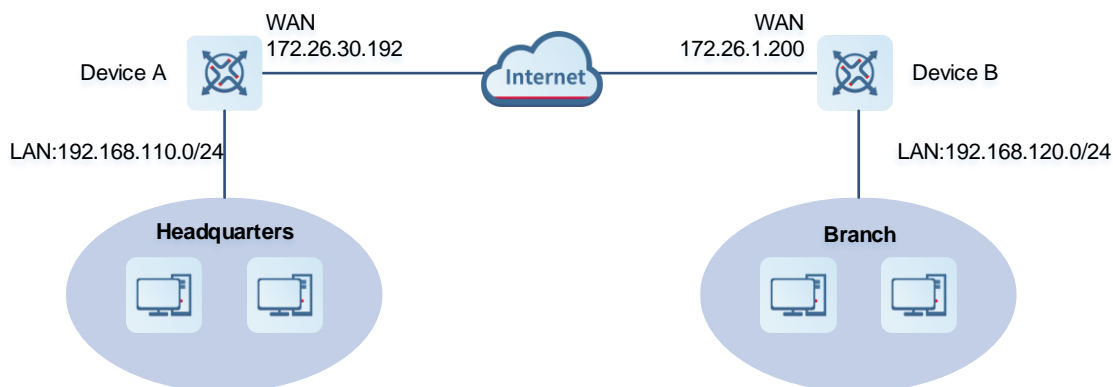


3. Configuration Roadmap

- Configure the HQ gateway Device A as the IPsec server.
- Configure the branch gateway Device B as the IPsec client.

4. Configuration Steps

- (1) Configure the HQ gateway.

- a Log in to the web management system and choose VPN > IPsec > IPsec Security Policy to access the IPsec Security Policy page.

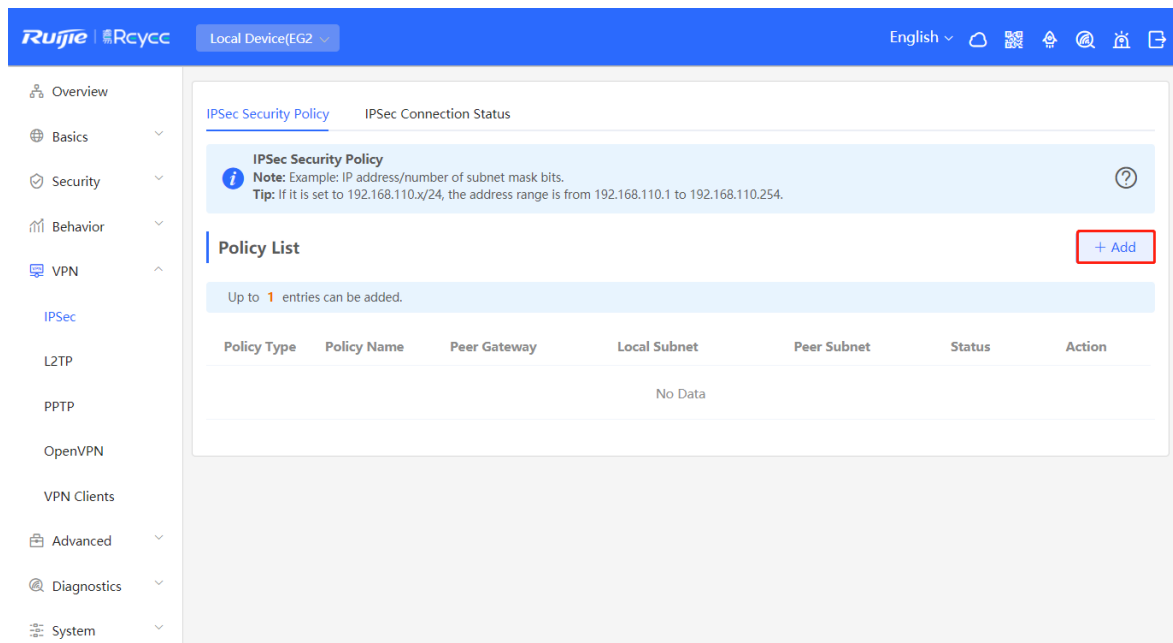

- b Click Add. In the dialog box that appears, set Policy Type to Server, enter the policy name, select the bound interface, and configure the local subnet to be accessed through IPsec and the pre-shared key.

If the device connects to other EG devices in the Rcycc network, you are advised to keep the default settings in IKE phase 1 and phase 2. If the device connects to devices from another vendor, keep the parameter settings consistent on the connected devices.

Add ×

Policy Type Client Server

* Policy Name

Interface ?

* Local Subnet

* Pre-shared Key

Status

1. Set IKE Policy

2. Connection Policy

(2) Configure the branch gateway.

- a Log in to the web management system and access the IPsec Security Policy page.
- b Click Add. In the dialog box that appears, set Policy Type to Client, enter the policy name, select the peer gateway (WAN port address or domain name of the HQ gateway), and configure the local subnet that needs to access the peer subnet and the pre-shared key the same as that on the HQ gateway. Keep the other phase 1 and phase 2 parameters consistent with those on the IPsec server.

Add
✕

Policy Type Client Server

* Policy Name

* Peer Gateway +

Interface ?

* Local Subnet

* Peer Subnet +

* Pre-shared Key

Status

1. Set IKE Policy

2. Connection Policy

5. Verifying Configuration

- Log in to the web management system of the HQ or branch gateway and choose **VPN > IPsec > IPsec Connection Status**. You can view the IPsec connection status between the HQ and branch.

IPsec Security Policy [IPsec Connection Status](#)

IPsec Connection Status
?

Name	SPI	Direction	Tunnel Client	Flow	Status	Security Protocol	Algorithm
test	3483169 338	in	172.26.30.192<--172.26.1.200	192.168.110.0/24 <-- 192.168.120.0/24	OK	ESP	AH Authentication: -- ESP Authentication: SHA1 ESP Security: AES-128
test	3281459 512	out	172.26.30.192-->172.26.1.200	192.168.110.0/24 --> 192.168.120.0/24	OK	ESP	AH Authentication: -- ESP Authentication: SHA1 ESP Security: AES-128

- Perform ping test between clients on the two ends that need to access each other. The clients can successfully ping and access each other.

8.1.6 Solution to IPsec VPN Connection Failure

- Run the ping command to test the connectivity between the client and server. For details, see Section [9.9.3 Network Tools](#). If the ping fails, check the network connection settings. Check whether the branch EG can ping to HQ EG. If the ping fails, check the network connection between the two EGs.

Click **Diagnostics > Network Tools**. Then, you can start the ping operation. For details, see Section [9.9.3 Network Tools](#).

- Confirm that the configurations on the IPsec server and IPsec client are correct.

Choose **VPN > IPsec > IPsec Security Policy** and confirm that the security policies configured on the two ends are matching.

Policy List + Add

Up to 1 entries can be added.

Policy Type	Policy Name	Peer Gateway	Local Subnet	Peer Subnet	Status	Action
Server	test	0.0.0.0	192.168.110.0/24	0.0.0.0/0	Enable	Edit Delete

Policy List + Add

Up to 1 entries can be added.

Policy Type	Policy Name	Peer Gateway	Local Subnet	Peer Subnet	Status	Action
Client	test	172.26.30.192	192.168.120.0/24	192.168.110.0/24	Enable	Edit Delete

- Check whether the WAN IP address of your HQ EG is a public IP address. If not, you need to configure DMZ or port mapping (UDP 500 and 4500 used as IPsec VPN port) on your egress gateway and set **Local ID Type** to **NAME** on HQ and branch gateways.

1. Set IKE Policy

IKE Policy 1: sha1-3des-dh1

IKE Policy 2: sha1-des-dh1

IKE Policy 3: sha1-3des-dh2

IKE Policy 4: md5-des-dh1

IKE Policy 5: md5-3des-dh2

Negotiation Mode: Main Mode Aggressive Mode

Local ID Type: IP NAME

* Local ID: Branch

Peer ID Type: IP NAME

* Peer ID: HQ

* Lifetime: 86400

DPD: Enable Disable

1. Set IKE Policy

IKE Policy 1: sha1-3des-dh1

IKE Policy 2: sha1-des-dh1

IKE Policy 3: sha1-3des-dh2

IKE Policy 4: md5-des-dh1

IKE Policy 5: md5-3des-dh2

Negotiation Mode: Main Mode Aggressive Mode

Local ID Type: IP NAME

* Local ID: HQ

Peer ID Type: IP NAME

* Peer ID: Branch

* Lifetime: 86400

DPD: Enable Disable

8.2 Configuring L2TP VPN

8.2.1 Overview

Layer Two Tunneling Protocol (L2TP) is a virtual tunneling protocol, usually used in virtual private networks.

The L2TP protocol does not provide encryption and reliability verification functions, but it can work with a security protocol to implement encrypted data transmission. L2TP is frequently used with IPsec to encapsulate packets using L2TP before encapsulating packets using IPsec. This combination implements user verification and address allocation through L2TP and ensures communication security through IPsec.

L2TP VPN can be used to establish secure tunnels between the enterprise HQ and branches and allow traveling employees to access the HQ. Currently, the device can be deployed as the L2TP server or client.

8.2.2 Configuring the L2TP Server

1. Basic Settings of L2TP Server

Choose **Local Device > VPN > L2TP > L2TP Settings**.

Turn on the L2TP function, set **L2TP Type** to **Server**, set L2TP server parameters, and click **Save**.

L2TP Settings

Enable

L2TP Type Server Client

* Local Tunnel IP

* IP Range ?

* DNS Server

Tunnel Authentication Disable Enable

IPSec Security Open Security


Flow Control Disable Enable

* PPP Hello Interval

Save

Table 8-6 L2TP server configuration

Parameter	Description
Local Tunnel IP	Specify the local virtual IP address of the L2TP server. Clients can dial up to access the L2TP server through this address.
IP Range	Specify the address pool used by the L2TP server to allocate IP addresses to clients.
DNS Server	Specify the DNS server address pushed by the L2TP server to clients.
Tunnel Authentication	<p>Specify whether to enable L2TP tunnel authentication. If you enable this function, you need to configure a tunnel authentication key. By default, tunnel authentication is disabled.</p> <p>The tunnel authentication request can be initiated by clients. If tunnel authentication is enabled on one end, a tunnel to the peer can be established only when tunnel authentication is also enabled on the peer and consistent keys are configured on the two ends. Otherwise, the local end will automatically shut down the tunnel connection. If tunnel authentication is disabled on both ends, no authentication key is required for tunnel establishment.</p> <p>When a PC functions as the client to access the L2TP server, you are advised not to enable tunnel authentication on the L2TP server.</p>
IPSec Security	<p>Specify whether to encrypt the tunnel. If you select Security, the device encrypts the L2TP tunnel using IPsec, indicating the L2TP over IPsec mode.</p> <p>If an IPsec security policy is enabled on the current device, you cannot enable IPsec encryption for the L2TP tunnel. If you want to configure L2TP over IPsec, disable the IPsec security policy first.</p> <p>The IPsec encryption configuration on the L2TP server and client must be consistent. For details, see Configuring the L2TP over IPsec Server.</p>
Flow Control	The VPN server has a lower priority to control the traffic of the client than the custom policy. The VPN server can only limit the maximum uplink and downlink bandwidth per user for the client. For details, see 7.6.2 Smart Flow Control .
PPP Hello Interval	Specify the interval for sending PPP Hello packets after L2TP VPN is deployed. You are advised to retain the default configuration.

 **Caution**

The local tunnel address and IP address range of the address pool cannot overlap the network segment of the LAN port on the device.

2. Configuring the L2TP over IPsec Server

Choose **Local Device** > **VPN** > **L2TP** > **L2TP Settings**.

After you complete [Basic Settings of L2TP Server](#), enable IPsec encryption on the L2TP server to guarantee communication security. For details on the IPsec configuration, see Section [8.1 Configuring IPsec VPN](#).

L2TP Type Server Client

* Local Tunnel IP

* IP Range ?

* DNS Server

Tunnel Authentication Disable Enable

IPSec Security Open Security

* Pre-shared Key

IKE Policy ▼

Transform Set ▼

Negotiation Mode Main Mode Aggressive Mode

Local ID Type IP NAME

* PPP Hello Interval seconds

Table 8-7 L2TP over IPsec server configuration

Parameter	Description
Pre-shared Key	Specify the same unique pre-shared key as the credential for mutual authentication between the server and client.
IKE Policy	<p>Select the encryption algorithm, hash algorithm, and DH group ID used by the IKE protocol. To ensure successful IKE negotiation, the two parties engaged in IKE negotiation must have at least one set of consistent IKE policy. The IKE policies on the server and client must be consistent.</p> <ul style="list-style-type: none"> ● Hash algorithm: <ul style="list-style-type: none"> ○ sha1: SHA-1 algorithm ○ md5: MD5 algorithm ● Encryption algorithm: <ul style="list-style-type: none"> ○ des: DES algorithm using 56-bit keys ○ 3des: 3DES algorithm using 168-bit keys ○ aes-128: AES algorithm using 128-bit keys ○ aes-192: AES algorithm using 192-bit keys ○ aes-256: AES algorithm using 256-bit keys ● DH group ID: <ul style="list-style-type: none"> ○ dh1: 768-bit DH group ○ dh2: 1024-bit DH group ○ dh5: 1536-bit DH group
Transform Set	<p>Specify the set of security protocol and algorithms. During IPsec SA negotiation, the two parties use the same transform set to protect specific data flow. The transform set on the server and client must be the same.</p> <ul style="list-style-type: none"> ● Security protocol: The Encapsulating Security Payload (ESP) protocol provides data source authentication, data integrity check, and anti-replay functions for IPsec connections and guarantees data confidentiality. ● Verification algorithm: <ul style="list-style-type: none"> ○ sha1: SHA-1 HMAC ○ md5: MD5 HMAC ● Encryption algorithm: <ul style="list-style-type: none"> ○ des: DES algorithm using 56-bit keys ○ 3des: 3DES algorithm using 168-bit keys ○ aes-128: AES algorithm using 128-bit keys ○ aes-192: AES algorithm using 192-bit keys ○ aes-256: AES algorithm using 256-bit keys

Parameter	Description
Negotiation Mode	<p>Select Main Mode or Aggressive Mode. The negotiation mode on the server and client must be the same.</p> <ul style="list-style-type: none"> ● Main Mode: This mode is applicable to communication between fixed public network IP addresses and point-to-point communication between devices. In this mode, the peer identity is authenticated to provide high security. ● Aggressive Mode: The public network IP addresses obtained by ADSL dial-up users are not fixed and an NAT device may exist. Therefore, the aggressive mode is used to implement NAT traversal. In this mode, you need to set the local and peer ID type to NAME as the IP address is not fixed. The aggressive mode does not authenticate the peer identity, so it has low security.
Local ID Type	<p>Specify the ID type of the local device. The peer ID of the client must be the same as local ID of the server.</p> <ul style="list-style-type: none"> ● IP: The IP address is used as the identity ID. The ID of the local device is generated automatically. ● NAME: The host character string is used as the identity ID. The ID of the local device is generated automatically. In this case, you also need to configure the host character string that is used as the identity ID. <p>When the WAN port IP address of the server is a private network address, you need to set Local ID Type to NAME and configure DMZ on the external device.</p> <p>When the IP address is not fixed, you need to set Local ID Type to NAME and modify the peer device settings accordingly.</p>
Local ID	<p>When Local ID Type is set to NAME, the host character string is used as the identity ID. The peer ID of the client must be the same as local ID of the server.</p>

3. Configuring L2TP User

Choose **Local Device > VPN > VPN Clients**.

Only user accounts added to the VPN client list are allowed to dial up to connect to the L2TP server. Therefore, you need to manually configure user accounts for clients to access the L2TP server.

Click **Add**. In the dialog box that appears, set **Service Type** to **L2TP** or **ALL**. (If you select **ALL**, the created account can be used to establish all types of VPN tunnels.) Enter the username, password, and peer subnet, select a network mode, and click **OK**.

VPN Clients

VPN Client List

Username/Password


Up to 100 entries can be added.

	Username	Password	Service Type	Network Mode	Peer Subnet	Status	Action
<input type="checkbox"/>	test	test	ALL	PC to Router	-	Enable	Edit Delete

Add User ✕

Service Type

* Username

* Password 

Network Mode

Status

Table 8-8 L2TP user configuration

Parameter	Description
Username/Password	Specify the name and password of the L2TP user allowed to dial up to connect to the L2TP server. The username and password are used to establish a connection between the server and client.
Network Mode	<ul style="list-style-type: none"> ● PC to Router: The dial-up client is an individual. Select this mode when a PC wants to dial up to communicate with the remote PC through the LAN. ● Router to Router: The dial-up client is a user in a network segment. Select this mode when the LANs on two ends of the tunnel need to communicate through router dial-up.
Peer Subnet	Specify the IP address range used by the LAN on the peer end of the L2TP tunnel. Generally, the peer subnet is the IP address network segment of the LAN port on the device. (The LAN network segments of the server and client cannot overlap.) For example, when a branch dials up to connect to the HQ, enter the LAN network segment of the router.
Status	Specify whether to enable the user account.

8.2.3 Configuring the L2TP Client

1. Basic Settings of L2TP Client

Choose **Local Device > VPN > L2TP > L2TP Settings**.

Turn on the L2TP function, set **L2TP Type** to **Client**, set L2TP client parameters, and click **Save**.

i
L2TP Settings

Enable

L2TP Type Server **Client**

* Username

* Password 👁

Interface

Tunnel IP **Dynamic** Static

* Server Address

* Peer Subnet

Tunnel Authentication **Disable** Enable

IPSec Security **Open** Security

Work Mode **NAT** Router

* PPP Hello Interval seconds

Save

Table 8-9 L2TP client configuration

Parameter	Description
Username/Password	Specify the username and password for identity authentication for communication over the L2TP tunnel. The values must be the same as those configured on the L2TP server.
Interface	Specify the WAN port used by the client.
Tunnel IP	Specify the virtual IP address of the VPN tunnel client. If you select Dynamic , the client obtains an IP address from the server address pool. If you select Static , manually configure an idle static address within the range of the server address pool as the local tunnel IP address.
Server Address	Enter the WAN port IP address or domain name of the server. This address must be a public network IP address.

Parameter	Description
Peer Subnet	Enter the LAN network segment in which clients want to access the server. The value cannot overlap with the LAN network segment of the client.
Tunnel Authentication	Specify whether to enable L2TP tunnel authentication. If you enable this function, you need to enter tunnel authentication key the same as that configured on the server. By default, tunnel authentication is disabled. To protect tunnel security, you are advised to enable tunnel authentication.
IPSec Security	Specify whether to encrypt the tunnel. If you select Security , the device Enable the L2TP tunnel using IPsec, indicating the L2TP over IPsec mode. The IPsec encryption configuration on the server and client must be consistent. For details, see Configuring the L2TP over IPsec Client .
Work Mode	<ul style="list-style-type: none"> ● NAT: Perform NAT traversal on the data packet passing through the L2TP tunnel. That is, replace the source IP address of the data packet with the local virtual IP address of the L2TP tunnel. In NAT mode, the server cannot access the LAN where the client resides. ● Router: Only route the data packet passing through the L2TP tunnel. In router mode, the server can access the LAN where the client resides.
PPP Hello Interval	Specify the interval for sending PPP Hello packets after L2TP VPN is deployed. You are advised to retain the default configuration.

2. Configuring the L2TP over IPsec Client

Choose **Local Device > VPN > L2TP > L2TP Settings**.

After you complete [Basic Settings of L2TP Client](#), enable IPsec encryption on the L2TP client to guarantee communication security. The IPsec encryption configuration on the server and client must be consistent. For details, see [Configuring the L2TP over IPsec Server](#).

* Server Address

* Peer Subnet

Tunnel Authentication Disable Enable

IPSec Security Open Security

* Pre-shared Key

IKE Policy

Transform Set

Negotiation Mode Main Mode Aggressive Mode

Peer ID Type IP NAME

Work Mode NAT Router

* PPP Hello Interval seconds

8.2.4 Viewing the L2TP Tunnel Information

Choose **Local Device > VPN > L2TP > Tunnel List**.

It takes some time to establish a VPN connection between the server and client. After the configuration of the server and client is completed, wait for 1 to 2 minutes to refresh the page and view the L2TP tunnel establishment status.

L2TP Settings [Tunnel List](#)

Tunnel List ?

[Delete Selected](#)

	Username	Server/Client	Tunnel Name	Virtual Local IP	Access Server IP	Peer Virtual IP	DNS	Action
<input type="checkbox"/>	branch	Server	ppp0	20.0.0.1	172.26.1.200	20.1.1.2	114.114.114.114	Delete

Table 8-10 L2TP tunnel information

Parameter	Description
Username	Indicate the username used by the client for identity authentication.
Server/Client	Indicate the role of the current device, which is client or server.
Tunnel Name	Indicate the name of the vNIC generated by L2TP.

Parameter	Description
Virtual Local IP	Indicate the local virtual IP address of the tunnel. The virtual IP address of the L2TP client is allocated by the L2TP server.
Access Server IP	Indicate the real IP address of the peer connecting to the L2TP tunnel.
Peer Virtual IP	Indicate the peer virtual IP address of the tunnel. The virtual IP address of the L2TP client is allocated by the L2TP server.
DNS	Indicate the DNS server address allocated by the L2TP server.


8.2.5 Typical Configuration Example

1. Networking Requirements

An enterprise wants to establish an L2TP tunnel to allow its traveling employees and branch employees to access the servers deployed in the HQ LAN.

- Traveling employees want to access the HQ servers from their PCs through L2TP VPN.
- Branch employees need to frequently access documents on the HQ servers. The enterprise wants to deploy the branch router (Device B) as the L2TP client, so that branch employees can dial up to transparently and directly access documents on the HQ servers, as if they are accessing servers inside the branch.

2. Networking Diagram

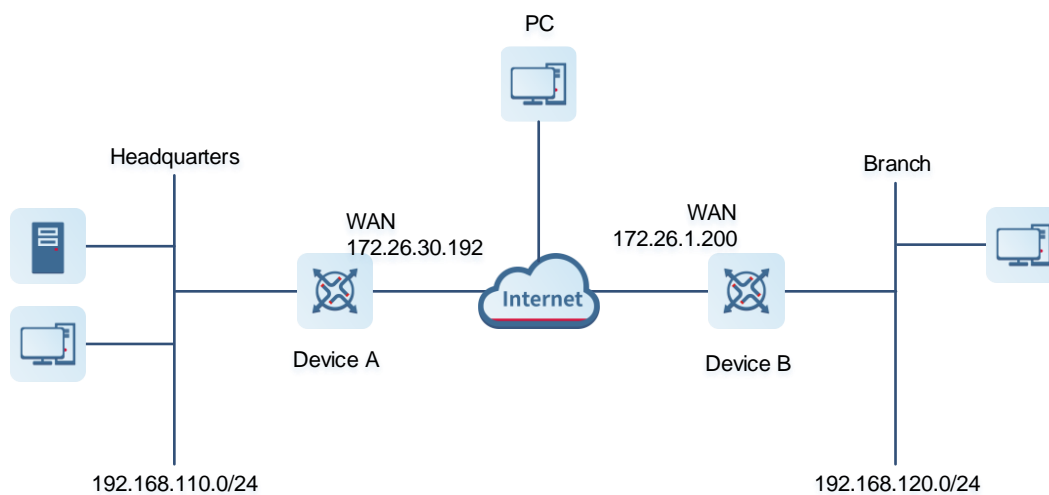

3. Configuration Roadmap

- Configure the HQ gateway Device A as the L2TP server.
- Configure the branch gateway Device B as the L2TP client.
- Configure the PC of the traveling employee as the L2TP client.


4. Configuration Steps

- (1) Configure the HQ gateway.

Note

The LAN address of the HQ cannot conflict with that of the branch. Otherwise, resource access will fail.

- a Log in to the web management system and choose **VPN > L2TP > L2TP Settings** to access the L2TP Settings page.

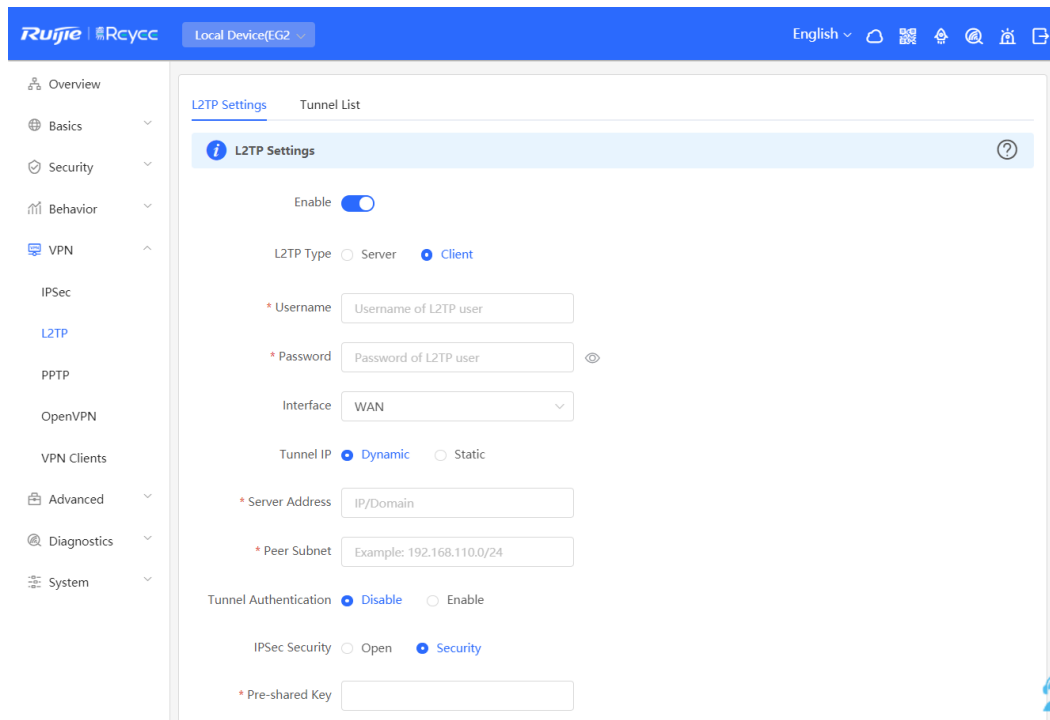

- b Turn on the L2TP function, set L2TP Type to Server, enter the local tunnel address, address pool IP address range, and DNS server address, specify whether to enable IPsec encryption and tunnel authentication, and click Save.

Enable

L2TP Type Server Client

* Local Tunnel IP

* IP Range ?

* DNS Server

Tunnel Authentication Disable Enable

IPSec Security Open Security

* Pre-shared Key

IKE Policy ▼

Transform Set ▼

Negotiation Mode Main Mode Aggressive Mode

Local ID Type IP NAME

* PPP Hello Interval seconds

Table 8-11 L2TP server configuration

Parameter	Description
Local Tunnel IP	Enter an IP address not in the LAN network segment. The PC can dial up to access the server through this IP address.
IP Range	Enter an IP address range not in the LAN network segment, which is used to allocate IP addresses to clients.
DNS Server	Enter an available DNS server address.
Tunnel Authentication	By default, tunnel authentication is disabled. After this function is enabled, the server and client can be connected only when they use the same tunnel key. You can keep tunnel authentication disabled.
IPSec Security	Specify whether to encrypt the L2TP tunnel using the IPsec protocol. You are advised to select Security to guarantee data security. If an IPsec security policy is enabled on the current device, you cannot enable IPsec encryption for the L2TP tunnel. If you want to configure L2TP over IPsec, disable the IPsec security policy first.

Parameter	Description
Pre-shared Key	Enter the key for IPsec authentication. The client can access the server only when the same pre-shared key is configured on the client.
IKE Policy Transform Set Negotiation Mode Local ID Type Local ID	Keep the default settings unless otherwise specified.
PPP Hello Interval	Keep the default settings unless otherwise specified.

- c Choose **VPN > VPN Clients** and add L2TP user accounts for the traveling employee and branch employee to access the HQ.

For the traveling employee account, set **Network Mode** to **PC to Router**.

For the branch employee account, set **Network Mode** to **Router to Router** and **Peer Subnet** to the LAN network segment of the branch gateway, that is 192.168.120.0/24.

Caution

The LAN network segments of the server and client cannot overlap.

Add User ×

Service Type: L2TP

* Username: branch

* Password: [masked]

Network Mode: Router to Router

* Peer Subnet: 192.168.120.0/24

Status:

Cancel **OK**

Add User ×

Service Type: L2TP

* Username: pc@l2tp

* Password: [masked]

Network Mode: PC to Router

Status:

Cancel **OK**

VPN Client List Username/Password 🔍 **+ Add** **Delete Selected**

Up to 100 entries can be added.

<input type="checkbox"/>	Username	Password	Service Type	Network Mode	Peer Subnet	Status	Action
<input type="checkbox"/>	test	test	ALL	PC to Router	-	Enable	Edit Delete
<input type="checkbox"/>	branch	branch	L2TP	Router to Router	192.168.120.0/24	Enable	Edit Delete
<input type="checkbox"/>	pc@l2tp	pc!2tp	L2TP	PC to Router	-	Enable	Edit Delete

(2) Configure the branch gateway.

- a Log in to the web management system and access the L2TP Settings page.
- b Turn on the L2TP function, set L2TP Type to Client, enter the username and password configured on the server, server address, and LAN network segment of the peer, configure IPsec encryption parameters the same as those on the server, and click Save.

Enable

IPsec Security Open Security

L2TP Type Server Client

* Username

* Password

Interface

Tunnel IP Dynamic Static

* Server Address

* Peer Subnet

* Pre-shared Key

IKE Policy

Transform Set

Negotiation Mode Main Mode Aggressive Mode

Peer ID Type IP NAME

Work Mode NAT Router

* PPP Hello Interval seconds

Tunnel Authentication Disable Enable

Table 8-12 L2TP client configuration

Parameter	Description
Username/Password	Enter the username and password configured on the server.
Interface	Select the WAN port on the client to establish a tunnel with the server.
Tunnel IP	Select Dynamic to automatically obtain the tunnel IP address. You can also select Static and enter an IP address in the address pool of the server.
Server Address	Enter the WAN port address of the server, that is 172.26.30.192.
Peer Subnet	Enter the LAN network segment (LAN port IP address range) of the server, that is 192.168.110.0/24.
Tunnel Authentication	The value must be the same as that on the server. In this example, you need to disable tunnel authentication.
IPsec Security	The value must be the same as that on the server. In this example, you need to set this parameter to Security .
Pre-shared Key	Enter the pre-shared key configured on the server.

Parameter	Description
IKE Policy Transform Set Negotiation Mode Peer ID Type Peer ID	The settings must be the same as those on the server. Set Peer ID Type to the same value as that of Local ID Type on the server.
Work Mode	If the HQ wants to access the LAN of the branch, set this parameter to Router .
PPP Hello Interval	Specify the interval for sending PPP Hello packets after L2TP VPN is deployed. Keep the default settings.

(3) Configure the PC of the traveling employee.

Note


Configure the PC of a traveling employee as the L2TP client. The following uses the PC running Windows 10 operating system as an example.

The Windows XP (shorted as XP) system and Windows 7/Windows 10 (shorted as Win7/10) system differ in their support for L2TP VPN: To enable L2TP VPN in the XP system, you need to modify the service registries. L2TP is supported in the Win7/10 system by default, without the need to modify registries.


Neither the Win7/Win10 system nor the XP system supports L2TP tunnel authentication. Therefore, tunnel authentication must be disabled on the server.

Apple mobile phones support L2TP over IPsec but do not support IPsec encryption for L2TP dial-up.


a Choose **Settings > Network & Internet > VPN** to access the VPN page.

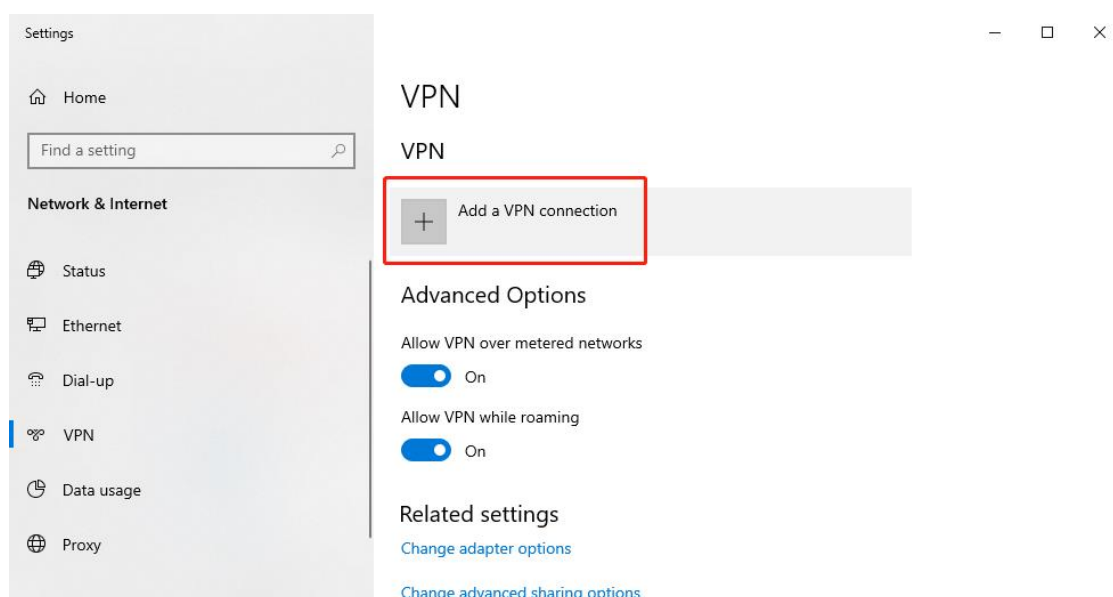

b Click **Add a VPN connection**. In the dialog box that appears, set VPN provider to **Windows**, enter the connection name and server address or domain name, and click **Save**.

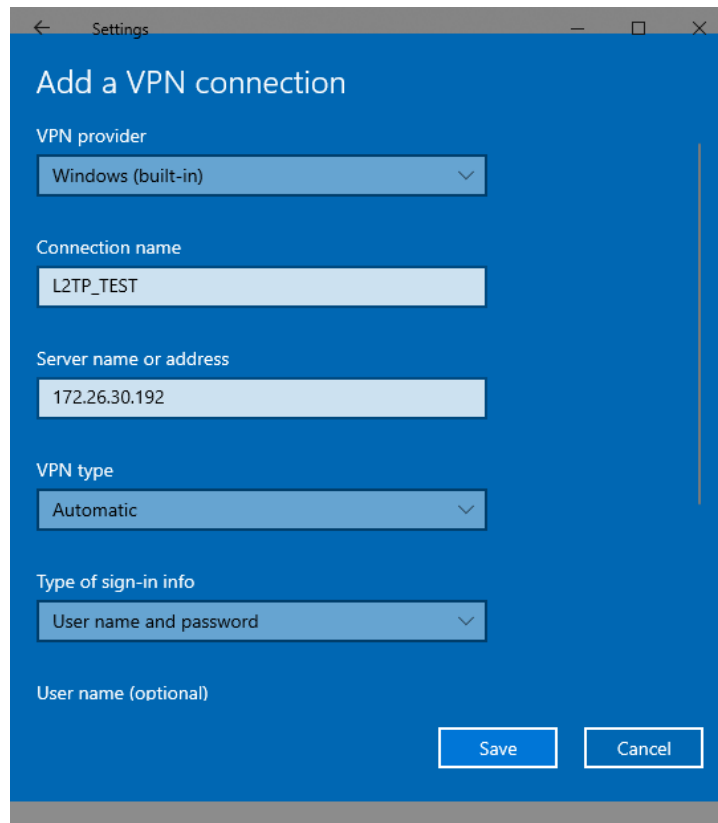


- c Right-click the created VPN connection named **L2TP_TEST** and select Properties to view the properties of the network connection.

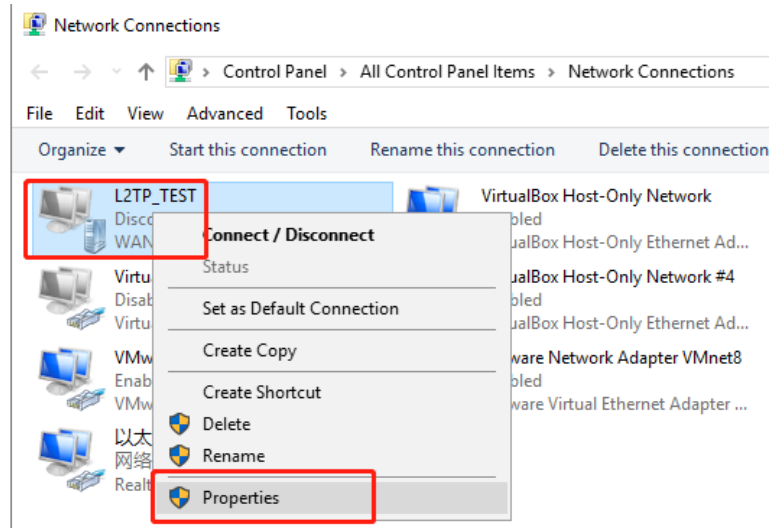


- d In the dialog box that appears, click the **Security** tab, and set **Type of VPN** to **Layer 2 Tunneling Protocol with IPsec (L2TP/IPsec)** and **Data encryption** to **Optional encryption (connect even if no encryption)**.

If IPsec encryption is not enabled on the L2TP server, select **Unencrypted password (PAP)** and click **OK**. Skip Step e .

If IPsec encryption is enabled on the L2TP server, perform Step e .

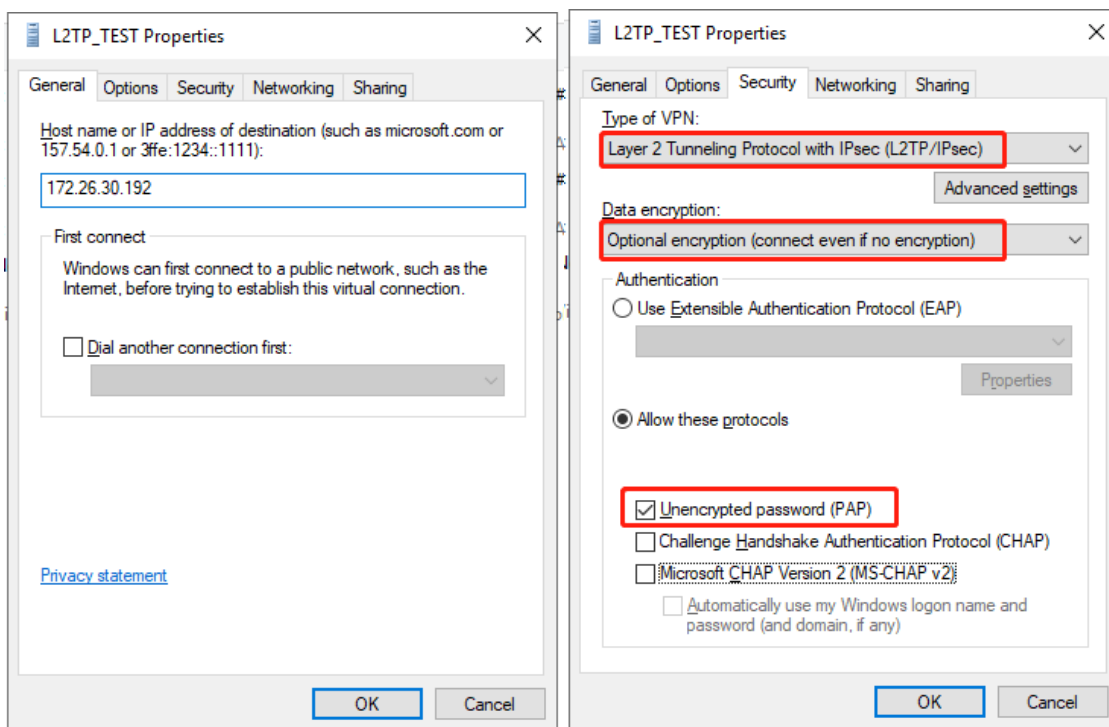


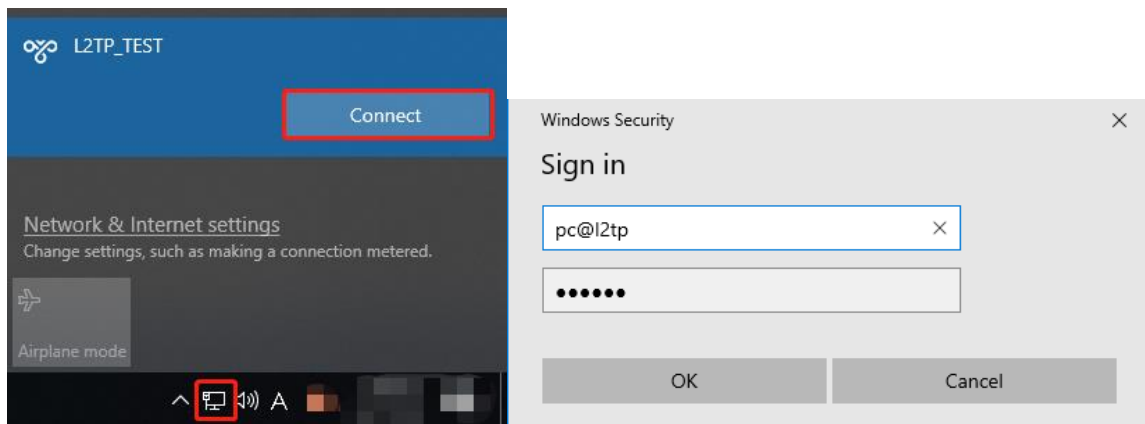
- e If IPsec encryption is enabled on the server, select **CHAP** and **MS-CHAP v2** as the identity authentication protocols and click **Advanced settings**. In the dialog box that appears, configure the pre-shared key the same as that on the server. After completing the configuration, click **OK**.

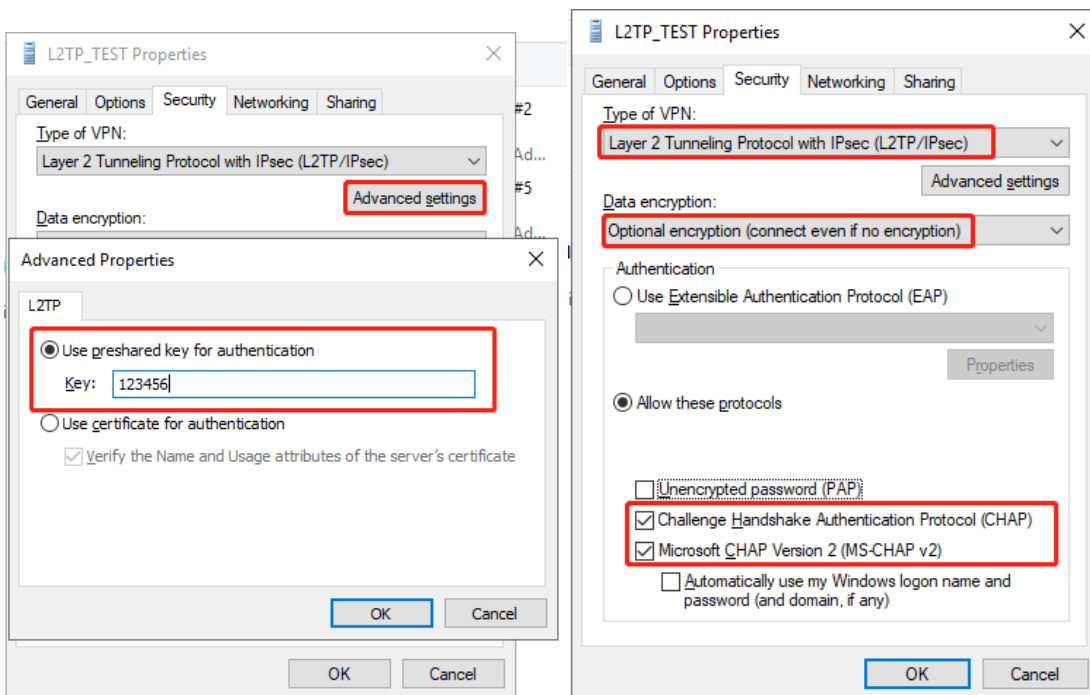

Note

The device does not support EAP for identity authentication. Therefore, you cannot select EAP-related identity authentication options in the Windows client. Otherwise, the VPN connection fails.

- f After the L2TP client configuration is completed on the PC, initiate a VPN connection on the PC. Click the network icon  in the task bar, select the created L2TP VPN connection, and click Connect. In the dialog box that appears, enter the username and password configured on the server.



5. Verifying Configuration

- (1) After the server and client are configured, wait for about 1 minute. If you can view the L2TP tunnel connection information on the HQ server and branch client, the connection is successful.

HQ:

L2TP Settings [Tunnel List](#)

Tunnel List								
	Username	Server/Client	Tunnel Name	Virtual Local IP	Access Server IP	Peer Virtual IP	DNS	Action
<input type="checkbox"/>	pc@l2tp	Server	ppp2	20.0.0.1	172.26.1.200	20.1.1.3	114.114.114.114	Delete
<input type="checkbox"/>	branch	Server	ppp0	20.0.0.1	172.26.1.200	20.1.1.2	114.114.114.114	Delete

Branch:

Tunnel List

Tunnel List								
	Username	Server/Client	Tunnel Name	Virtual Local IP	Access Server IP	Peer Virtual IP	DNS	Action
<input type="checkbox"/>	branch	Client	l2tp	20.1.1.2	172.26.30.192	20.0.0.1	114.114.114.114	Delete

- (2) Ping the LAN address of the peer from the HQ or branch. The HQ and branch can successfully communicate. The PC of the traveling employee and the PC of the branch employee can access the HQ server.

```
Administrator: C:\Windows\system32\cmd.exe

C:\Users\Administrator>ping 192.168.110.1

Pinging 192.168.110.1 with 32 bytes of data:
Reply from 192.168.110.1: bytes=32 time=2ms TTL=64
Reply from 192.168.110.1: bytes=32 time=2ms TTL=64
Reply from 192.168.110.1: bytes=32 time=2ms TTL=64
Reply from 192.168.110.1: bytes=32 time=2ms TTL=64

Ping statistics for 192.168.110.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 2ms, Average = 2ms
```

8.2.6 Solution to L2TP VPN Connection Failure

- (1) Run the ping command to test the connectivity between the client and server. For details, see Section [9.9.3 Network Tools](#). If the ping fails, check the network connection settings. Check whether the branch EG can ping to HQ EG. If the ping fails, check the network connection between the two EGs.

Choose **Diagnostics** > **Network Tools**. Then, you can start the ping operation. For details, see Section [9.9.3 Network Tools](#).

- (2) Check whether the username and password used by the client are the same as those configured on the server.
- (3) Check whether the WAN port IP address of your HQ EG is a public network IP address. If not, you need to configure DMZ on your egress gateway.

8.3 Configuring PPTP VPN

8.3.1 Overview

Point-to-Point Tunneling Protocol (PPTP) is an enhanced security protocol designed based on the Point-to-Point Protocol (PPP). It allows an enterprise to use private tunnels to expand its enterprise network over the public network. PPTP relies on the PPP protocol to implement security functions such as encryption and identity authentication. Generally, PPTP works with Password Authentication Protocol (PAP), Challenge Handshake Authentication Protocol (CHAP), Microsoft Challenge Handshake Authentication Protocol (MS-CHAPv1/v2), or Extensible Authentication Protocol-Transport Layer Security (EAP-TLS) for identity authentication and Microsoft Point-to-Point Encryption (MPPE) for encryption to improve security.

Currently, the device can be deployed as the PPTP server or client. It supports MPPE for encryption and MSCHAP-v2 for identity authentication, and does not support EAP authentication.

8.3.2 Configuring the PPTP Service

1. Configuring the PPTP Server

Choose **Local Device** > **VPN** > **PPTP** > **PPTP Settings**.

Turn on the PPTP function, set **PPTP Type** to **Server**, configure PPTP server parameters, and click **Save**.

PPTP Settings Tunnel List

PPTP Settings

Enable

PPTP Type Server Client

* Local Tunnel IP

* IP Range ?

* DNS Server

MPPE Disable Enable

* PPP Hello Interval seconds

Save

Table 8-13 PPTP server configuration

Parameter	Description
Local Tunnel IP	Specify the local virtual IP address of the L2TP server. Clients can dial up to access the L2TP server through this address.
IP Range	Specify the address pool used by the PPTP server to allocate IP addresses to clients.
DNS Server	Specify the DNS server address pushed by the PPTP server to clients.

Parameter	Description
MPPE	<p>Specify whether to use MPPE to encrypt the PPTP tunnel.</p> <p>After MPPE is enabled on the server: If Data encryption is set to Optional encryption on the client, the server and client can be connected but the server does not encrypt packets. If Data encryption is set to Require encryption on the client, the server and client can be connected and the server encrypts packets. If Data encryption is set to No encryption allowed on the client, the server and client cannot be connected.</p> <p>If MPPE is disabled on the server but the client requires encryption, the server and client connection fails.</p> <p>By default, MPPE is disabled on the server. After you enable MPPE, the bandwidth performance of the device degrades. You are advised to keep MPPE disabled if there are no special security requirements.</p>
Flow Control	<p>The VPN server has a lower priority to control the traffic of the client than the custom policy. The VPN server can only limit the maximum uplink and downlink bandwidth per user for the client. For details, see 7.6.2 Smart Flow Control.</p>
PPP Hello Interval	<p>Specify the interval for sending PPP Hello packets after PPTP VPN is deployed.</p>

 **Caution**


The local tunnel address and IP address range of the address pool cannot overlap the network segment of the LAN port on the device.

2. Configuring PPTP User

Choose **Local Device > VPN > VPN Clients**.

Only user accounts added to the VPN client list are allowed to dial up to connect to the PPTP server. Therefore, you need to manually configure user accounts for clients to access the PPTP server.

Click **Add**. In the dialog box that appears, set **Service Type** to **PPTP** or **ALL**. (If you select **ALL**, the created account can be used to establish all types of VPN tunnels.) Enter the username, password, and peer subnet, select a network mode, and click **OK**.

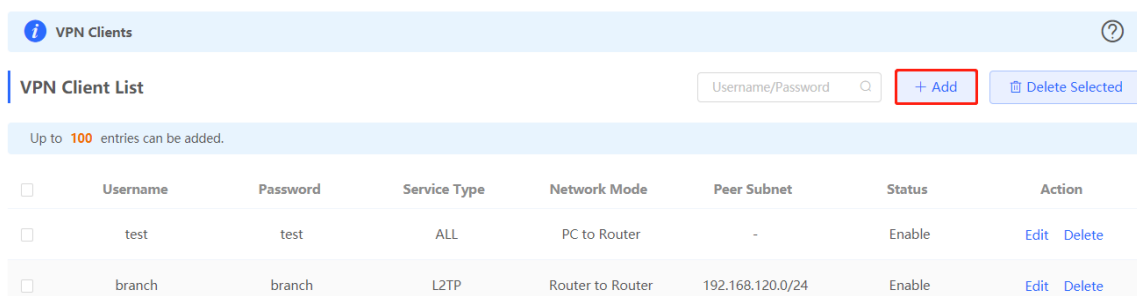

VPN Clients

VPN Client List

Up to 100 entries can be added.

<input type="checkbox"/>	Username	Password	Service Type	Network Mode	Peer Subnet	Status	Action
<input type="checkbox"/>	test	test	ALL	PC to Router	-	Enable	Edit Delete
<input type="checkbox"/>	branch	branch	L2TP	Router to Router	192.168.120.0/24	Enable	Edit Delete

Add User
×

Service Type

* Username

* Password 👁

Network Mode

Status

Table 8-14 PPTP user configuration

Parameter	Description
Username/Password	Specify the name and password of the PPTP user allowed to dial up to connect to the PPTP server. The username and password are used to establish a connection between the server and client.
Network Mode	<ul style="list-style-type: none"> ● PC to Router: The dial-up client is an individual. Select this mode when a PC wants to dial up to communicate with the remote PC through the LAN. ● Router to Router: The dial-up client is a user in a network segment. Select this mode when the LANs on two ends of the tunnel need to communicate through router dial-up.
Peer Subnet	Specify the IP address range used by the LAN on the peer end of the PPTP tunnel. Generally, the peer subnet is the IP address network segment of the LAN port on the device. (The LAN network segments of the server and client cannot overlap.) For example, when a branch dials up to connect to the HQ, enter the LAN network segment of the router.
Status	Specify whether to enable the user account.

8.3.3 Configuring the PPTP Client

Choose **Local Device > VPN > PPTP > PPTP Settings**.

Turn on the PPTP function, set **PPTP Type** to **Client**, configure PPTP client parameters, and click **Save**.

[PPTP Settings](#) Tunnel List

i **PPTP Settings**

Enable

PPTP Type Server Client

* Username

* Password 👁

Interface ▼

Tunnel IP Dynamic Static

* Server Address

* Peer Subnet

MPPE Disable Enable

Work Mode NAT Router

* PPP Hello Interval seconds

Save

Table 8-15 PPTP client configuration

Parameter	Description
Username/Password	Specify the username and password for identity authentication for communication over the PPTP tunnel. The values must be the same as those configured on the PPTP server.
Interface	Specify the WAN port used by the client.
Tunnel IP	Specify the virtual IP address of the VPN tunnel client. If you select Dynamic , the client obtains an IP address from the server address pool. If you select Static , manually configure an idle static address within the range of the server address pool as the local tunnel IP address.
Server Address	Enter the WAN port IP address or domain name of the server. This address must be a public network IP address.

Parameter	Description
Peer Subnet	Enter the LAN network segment in which clients want to access the server. The value cannot overlap with the LAN network segment of the client.
MPPE	Specify whether to use MPPE to encrypt the PPTP tunnel. The value must be the same as that on the server.
Work Mode	NAT: The client can access the server network, but the server cannot access the client network. Router: The server can access the client network.
PPP Hello Interval	Specify the interval for sending PPP Hello packets after a PPTP tunnel is established. You are advised to retain the default configuration.

8.3.4 Viewing the PPTP Tunnel Information

Choose **Local Device > VPN > PPTP > Tunnel List**.

It takes some time to establish a VPN connection between the server and client. After the configuration of the server and client is completed, wait for 1 to 2 minutes to refresh the page and view the PPTP tunnel establishment status.

PPTP Settings [Tunnel List](#)

Tunnel List

Delete Selected

<input type="checkbox"/>	Username	Server/Client	Tunnel Name	Virtual Local IP	Access Server IP	Peer Virtual IP	DNS	Action
<input type="checkbox"/>	branch	Server	ppp1	10.1.1.1	172.26.1.200	10.2.2.2	114.114.114.114	Delete

Table 8-16 PPTP tunnel information

Parameter	Description
Username	Indicate the username used by the client for identity authentication.
Server/Client	Indicate the role of the current device, which is client or server.
Tunnel Name	Indicate the name of the vNIC generated by PPTP.
Virtual Local IP	Indicate the local virtual IP address of the tunnel. The virtual IP address of the PPTP client is allocated by the PPTP server.
Access Server IP	Indicate the real IP address of the peer connecting to the PPTP tunnel.

Parameter	Description
Peer Virtual IP	Indicate the peer virtual IP address of the tunnel. The virtual IP address of the PPTP client is allocated by the PPTP server.
DNS	Indicate the DNS server address allocated by the PPTP server.


8.3.5 Typical Configuration Example

1. Networking Requirements

An enterprise wants to establish a PPTP tunnel to allow its traveling employees and branch employees to access the servers deployed in the HQ LAN.

- Traveling employees want to access the HQ servers from their PCs through PPTP dial-up.
- Branch employees need to frequently access documents on the HQ servers. The enterprise wants to deploy the branch router (Device B) as the PPTP client, so that branch employees can dial up to transparently and directly access documents on the HQ servers, as if they are accessing servers inside the branch.

2. Networking Diagram

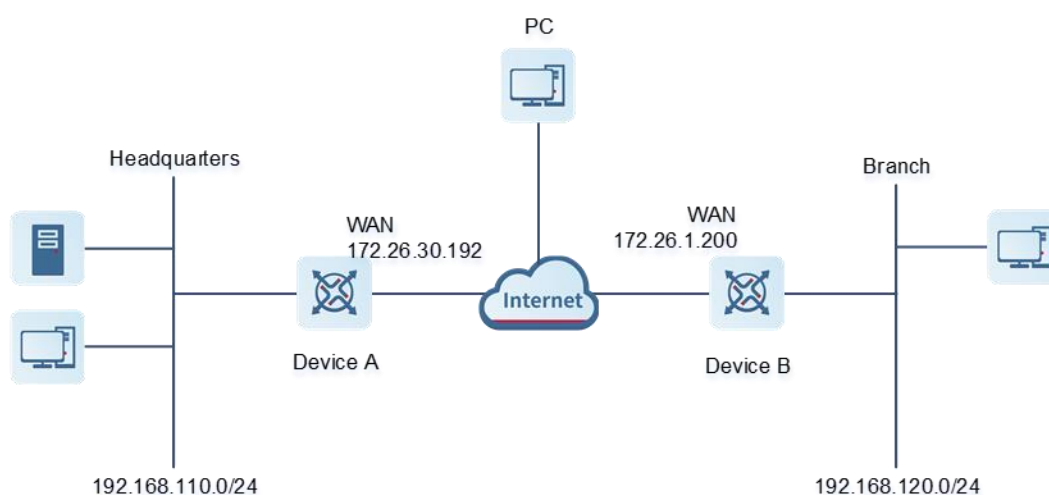

3. Configuration Roadmap

- Configure the HQ gateway Device A as the PPTP server.
- Configure the branch gateway Device B as the PPTP client.
- Configure the PC of the traveling employee as the PPTP client.


4. Configuration Steps

- (1) Configure the HQ gateway.

Note

The LAN address of the HQ cannot conflict with that of the branch. Otherwise, resource access will fail.

- a Log in to the web management system and choose VPN > PPTP > PPTP Settings to access the PPTP Settings page.

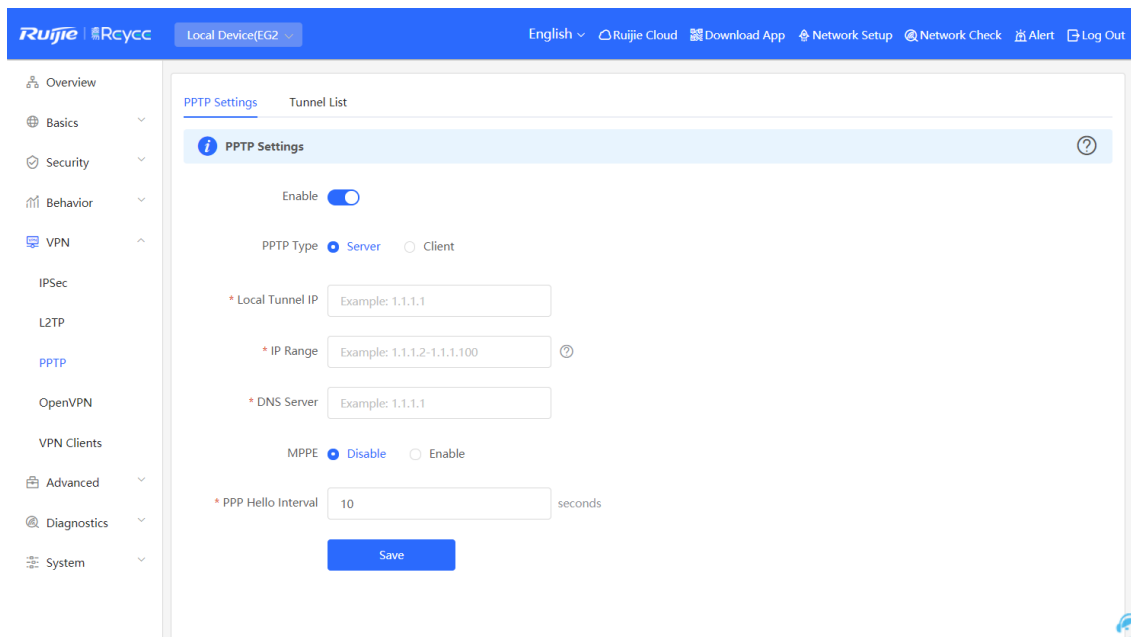

- b Turn on the PPTP function, set PPTP Type to Server, enter the local tunnel address, address pool IP address range, and DNS server address, specify whether to enable MPPE encryption, and click Save.

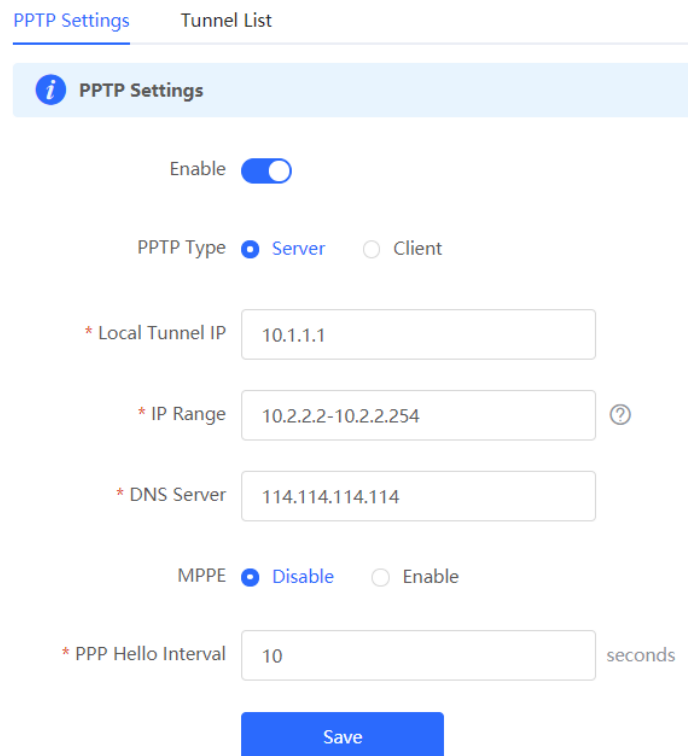



Table 8-17 PPTP server configuration

Parameter	Description
Local Tunnel IP	Enter an IP address not in the LAN network segment. The PC can dial up to access the server through this IP address.
IP Range	Enter an IP address range not in the LAN network segment, which is used to allocate IP addresses to clients.
DNS Server	Enter an available DNS server address.
MPPE	Specify whether to use MPPE to encrypt the PPTP tunnel. The value must be the same as that on the client. After you enable MPPE, the device security is improved but the bandwidth performance of the device degrades. You are advised to keep MPPE disabled if there are no special security requirements.
PPP Hello Interval	Keep the default settings unless otherwise specified.

- c Choose **VPN > VPN Clients** and add PPTP user accounts for the traveling employee and branch employee to access the HQ.

For the traveling employee account, set **Network Mode to PC to Router**.

For the branch employee account, set **Network Mode to Router to Router** and **Peer Subnet** to the LAN network segment of the branch gateway.

 **Caution**

The LAN network segments of the server and client cannot overlap.

Add User ×

Service Type:

* Username:

* Password:

Network Mode:

* Peer Subnet:

Status:

Add User ×

Service Type:

* Username:

* Password:

Network Mode:

Status:

VPN Client List Username/Password + Add Delete Selected

Up to 100 entries can be added.

<input type="checkbox"/>	Username	Password	Service Type	Network Mode	Peer Subnet	Status	Action
<input type="checkbox"/>	test	test	ALL	PC to Router	-	Enable	Edit Delete
<input type="checkbox"/>	branch	branch	PPTP	Router to Router	192.168.120.0/24	Enable	Edit Delete
<input type="checkbox"/>	pc@pptp	pcpptp	PPTP	PC to Router	-	Enable	Edit Delete

(2) Configure the branch gateway.

- a Log in to the web management system and access the PPTP Settings page.
- b Turn on the PPTP function, set PPTP Type to Client, enter the username and password configured on the server, server address, and LAN network segment of the peer, configure IPsec encryption parameters the same as those on the server, and click Save.

PPTP Settings

Enable

PPTP Type Server Client

* Username

* Password 👁

Interface

Tunnel IP Dynamic Static

* Server Address

* Peer Subnet

MPPE Disable Enable

Work Mode NAT Router

* PPP Hello Interval seconds

Table 8-18 PPTP client configuration

Parameter	Description
Username/Password	Enter the username and password configured on the server.

Parameter	Description
Interface	Select the WAN port on the client to establish a tunnel with the server.
Tunnel IP	Select Dynamic to automatically obtain the tunnel IP address. You can also select Static and enter an IP address in the address pool of the server.
Server Address	Enter the WAN port address of the server.
Peer Subnet	Enter the LAN network segment (LAN port IP address range) of the server.
MPPE	The value must be the same as that on the server.
Work Mode	If the HQ wants to access the LAN of the branch, set this parameter to Router .
PPP Hello Interval	Specify the interval for sending PPP Hello packets after PPTP VPN is deployed. Keep the default settings.


(3) Configure the PC of the traveling employee.

Note


Configure the PC of a traveling employee as the PPTP client. The following uses the PC running Windows 10 operating system as an example.

Enable ports 1723 (PPTP) and 47 (GRE) on the PC firewall.


a Choose Settings > Network & Internet > VPN to access the VPN page.

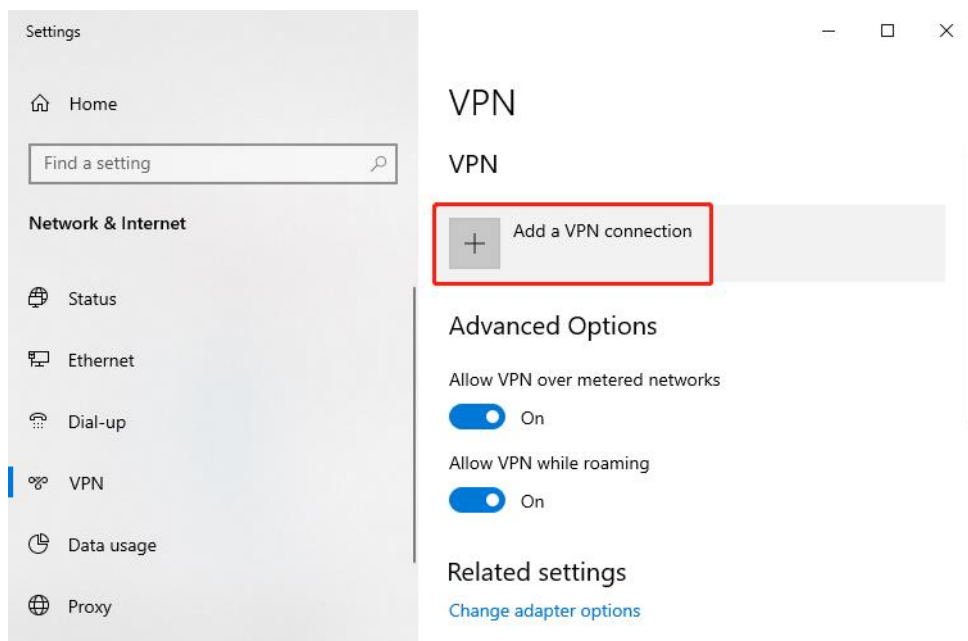

b Click **Add a VPN connection**. In the dialog box that appears, set VPN provider to **Windows** and VPN type to **Point to Point Tunneling Protocol (PPTP)**, enter the connection name and server address or domain name, and click **Save**.

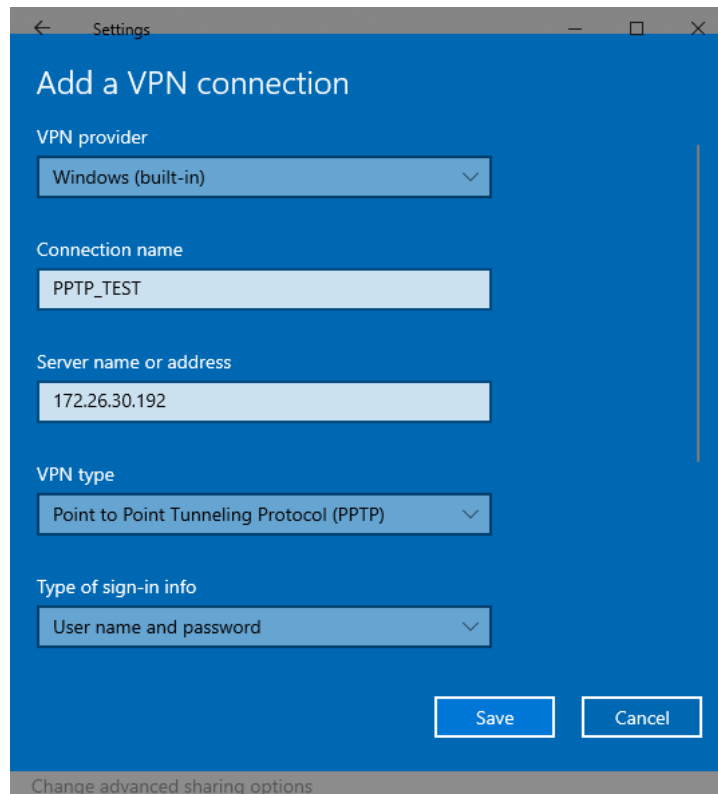


- c Right-click the created VPN connection named **PPTP_TEST** and select Properties to view the properties of the network connection.

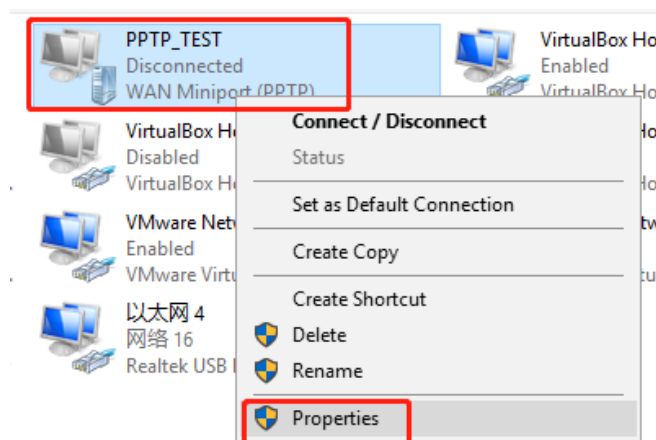

- d In the dialog box that appears, click the **Security** tab.

If MPPE is not enabled on the PPTP server, set **Data encryption** to **Optional encryption** or **No encryption allowed** and use PAP, CHAP, or MS-CHAP v2 for identity authentication, as shown in the following figure on the left.



If MPPE is enabled on the PPTP server, set **Data encryption** to **Require encryption** or **Maximum strength encryption** and use MS-CHAP v2 for identity authentication, as shown in the following figure on the right.

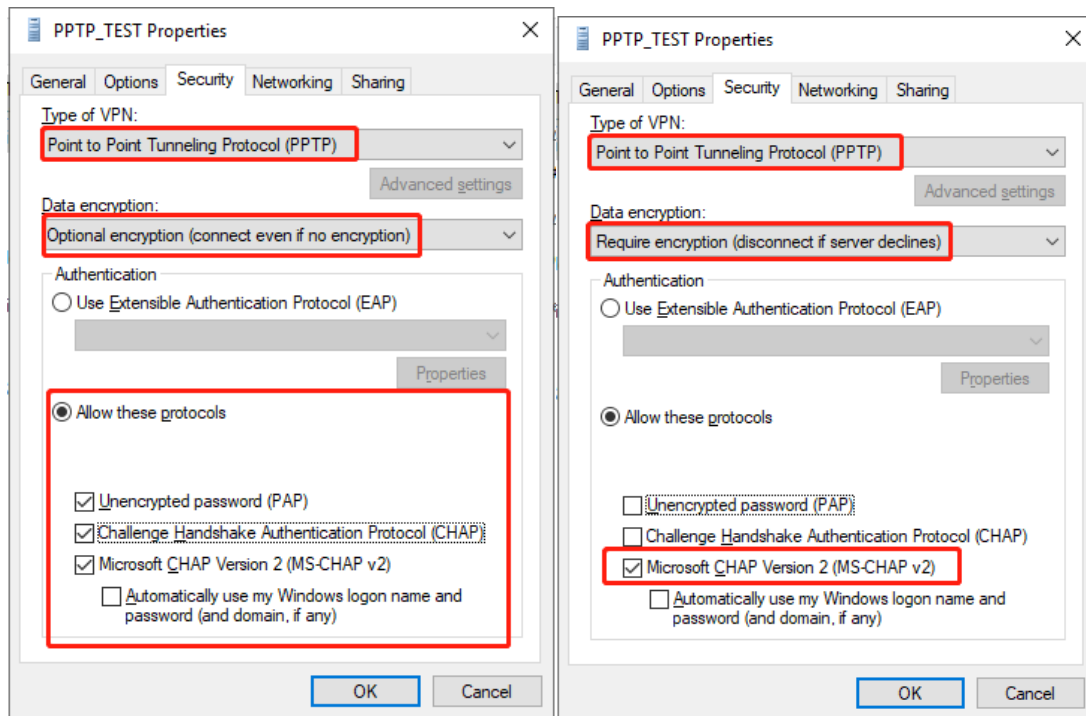


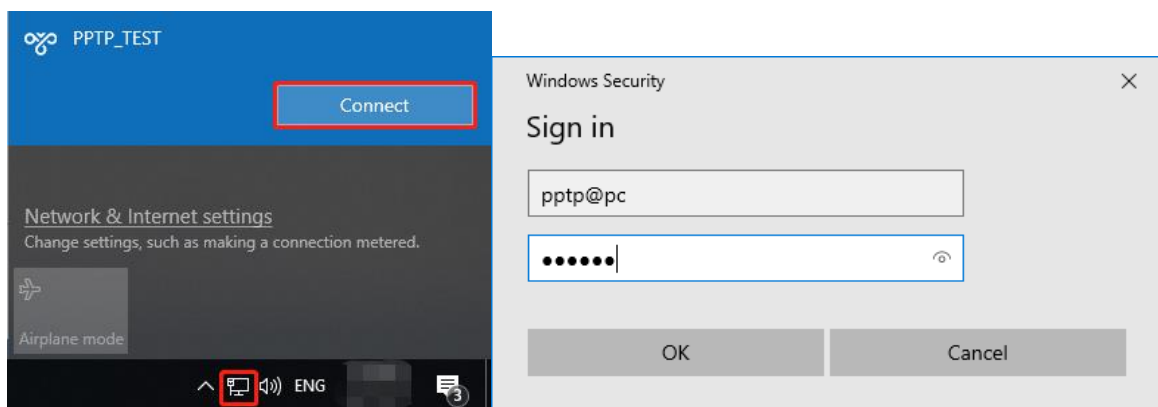
Note

The device does not support EAP for identity authentication. Therefore, you cannot select EAP-related identity authentication options in the Windows client. Otherwise, the VPN connection fails.

- e When the PC functions as a dial-up client, configure the PC by using either of the following methods:
 - o Add a route to the VPN peer network segment on the PC as the administrator.
 - o In the **Properties** dialog box of the local VPN connection, select **Use default gateway on remote network**. After the VPN connection is successful, all data flows from the PC to the Internet are routed to the VPN tunnel. The following figures show the detailed configuration.

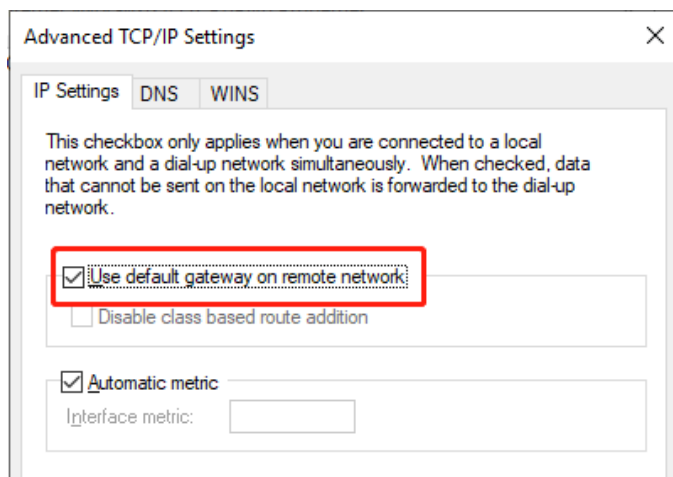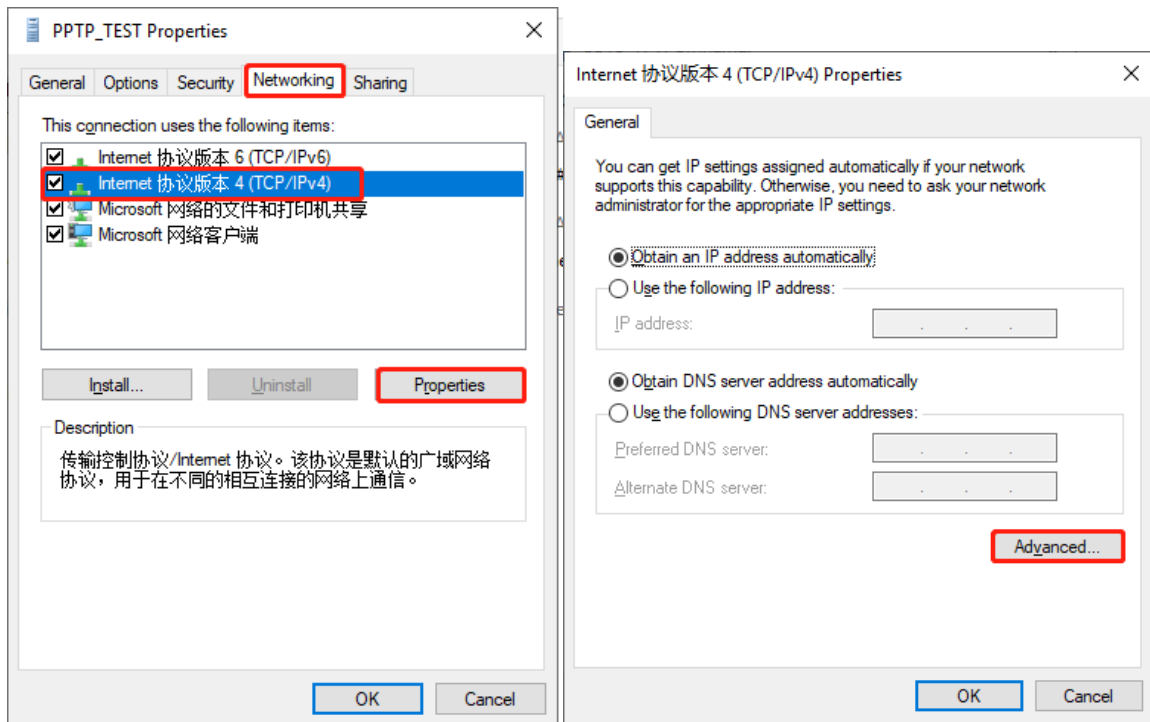

- f After the PPTP client configuration is completed on the PC, initiate a VPN connection on the PC. Click the network icon  in the task bar, select the PPTP VPN connection, and click **Connect**. In the dialog box that appears, enter the username and password configured on the server.



5. Verifying Configuration

- (1) After the server and client are configured, wait for about 1 minute. If you can view the L2TP tunnel connection information on the HQ server and branch client, the connection is successful.

HQ:

PPTP Settings [Tunnel List](#)

Tunnel List								
<input type="checkbox"/>	Username	Server/Client	Tunnel Name	Virtual Local IP	Access Server IP	Peer Virtual IP	DNS	Action
<input type="checkbox"/>	pc@pptp	Server	ppp2	10.1.1.1	172.26.1.200	10.2.2.3	114.114.114.114	Delete
<input type="checkbox"/>	branch	Server	ppp1	10.1.1.1	172.26.1.200	10.2.2.2	114.114.114.114	Delete

Branch:

Tunnel List								
<input type="checkbox"/>	Username	Server/Client	Tunnel Name	Virtual Local IP	Access Server IP	Peer Virtual IP	DNS	Action
<input checked="" type="checkbox"/>	branch	Client	pptp	10.2.2.2	172.26.30.192	10.1.1.1	114.114.114.114	Delete

- (2) Ping the LAN address of the peer from the HQ or branch. The HQ and branch can successfully communicate. The PC of the traveling employee and the PC of the branch employee can access the HQ server.

```

c:\> Administrator: C:\Windows\system32\cmd.exe

C:\Users\Administrator>ping 192.168.110.1

Pinging 192.168.110.1 with 32 bytes of data:
Reply from 192.168.110.1: bytes=32 time=2ms TTL=64
Reply from 192.168.110.1: bytes=32 time=2ms TTL=64
Reply from 192.168.110.1: bytes=32 time=2ms TTL=64
Reply from 192.168.110.1: bytes=32 time=2ms TTL=64

Ping statistics for 192.168.110.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 2ms, Average = 2ms
  
```

8.3.6 Solution to PPTP VPN Connection Failure

- (1) iPhones and other IOS devices do not support PPTP VPN. Please use L2TP VPN instead
- (2) Run the ping command to test the connectivity between the client and server. For details, see Section [9.9.3 Network Tools](#). If the ping fails, check the network connection settings. Check whether the branch EG can ping to HQ EG. If the ping fails. Check the network connection between the two EGs.
Choose **Diagnostics** > **Network Tools**. Then, you can start the ping operation. For details, see Section [9.9.3 Network Tools](#).
- (3) Check whether the username and password used by the client are the same as those configured on the server.
- (4) Check whether the WAN port IP address of your HQ EG is a public network IP address. If not, please configure DMZ on your egress gateway.

8.4 Configuring OpenVPN

⚠ Caution

- The RG-EG105G does not support the OpenVPN function.
 - IPTV connection is not supported only in the Chinese environment. To connect to IPTV in the Chinese environment, switch the system language. For details, see Section [9.11 Switching System Language](#).
-

8.4.1 Overview

1. OpenVPN Overview

Due to security considerations or cross-NAT communication needs, private channels need to be established between enterprises or between individual and enterprise. OpenVPN is used to establish Layer 2 or Layer 3 VPN tunnels by using the vNIC. OpenVPN supports flexible client authorization modes, supports authentication through certificate or username and password, and allows users to connect to VPN virtual interfaces through the firewall. It is easier to use than other types of VPN technologies. OpenVPN can run in the Linux, xBSD, Mac OS X, and Windows 2000/XP systems. The device can establish VPN connections to PCs, Android/Apple mobile phones, routers, and Linux devices, and it is compatible with most OpenVPN products in the market.

OpenVPN connections can traverse most proxy servers and can function well in the NAT environment. The OpenVPN server can push the following network configuration to clients: IP address, routes, and DNS settings.

2. Certificate Overview

The major advantage of OpenVPN lies in its high security, but OpenVPN security requires the support of certificates.

The OpenVPN client supports certificates **ca.crt**, **ca.key**, **client.crt**, and **client.key** and the OpenVPN server supports certificates **ca.crt**, **ca.key**, **server.crt**, and **server.key**.

8.4.2 Configuring the OpenVPN Server

Choose **Local Device > VPN > OpenVPN**.

1. Basic Settings

Turn on **Enable** to enable the OpenVPN function, set **OpenVPN Type** to **Server**, set other parameters, and click **Save**. After the basic settings are completed, you can view the tunnel information of the server in the tunnel list.

OpenVPN Tunnel List

i **OpenVPN**

Enable

OpenVPN Type Server Client

Server Mode

Protocol

* Server Address

* Port ID 1-65535

* IP Range ?

Deliver Route ? +

Flow Control Disable Enable

Expand

Client Config

Table 8-19 OpenVPN server basic settings

Parameter	Description
Server Mode	<p>Select a server authentication mode. The options are Account, Certificate, and Account & Certificate.</p> <ul style="list-style-type: none"> ● Account: Enter the correct username and password and upload the CA certificate on the client to connect to the server. The configuration is simple. ● Certificate: Upload the CA certificate and client certificate and enter the correct private key on the client to connect to the server. ● Account & Certificate: Upload the CA certificate and client certificate and enter the correct username, password, and private key. This mode is applicable to scenarios with high security requirements.

Parameter	Description
Protocol	<p>Select a protocol for all OpenVPN communications based on a single IP port. The options are UDP and TCP.</p> <p>The default value is UDP, which is recommended. When you select a protocol, pay attention to the network status between two encrypted tunnel ends. If high latency or heavy packet loss occurs, select TCP as the underlying protocol.</p>
Server Address	Specify the server address for client connection. You can set this parameter to a domain name.
Port ID	Specify the port used by the OpenVPN service process. Internet Assigned Numbers Authority (IANA) specifies port 1194 as the official port for the OpenVPN service. If the port is in use or disabled in the local network, the server log prompts port binding failure and you are asked to change the port number.
IP Range	Specify the network segment of the OpenVPN address pool. The first available in the address pool is allocated to the server, and the other addresses are allocated to clients. For example, if this parameter is set to 10.80.12.0/24 , the VPN virtual address of the server is 10.80.12.1.
Deliver Route	Specify the VPN dial-up line for clients to access the LAN network segment of the server. The server informs clients that want to access the server LAN of the route information. You can configure a maximum of three routes.
Flow Control	The VPN server has a lower priority to control the traffic of the client than the custom policy. The VPN server can only limit the maximum uplink and downlink bandwidth per user for the client. For details, see 7.6.2 Smart Flow Control .
Client Config	<p>Click Export to export the parameter configuration of the client connected to the server in the .tar compressed package. The decompressed information is used for setting the OpenVPN client.</p> <p>In account mode, the compressed package contains the configuration file client.ovpn, CA certificate ca.crt, and CA private key ca.key.</p> <p>If certificate authentication is configured, the compressed package contains the configuration file client.ovpn, CA certificate ca.crt, CA private key ca.key, client certificate client.crt, and client private key client.key.</p> <p>If TLS authentication is enabled, the compressed package contains the TLS identity authentication key tls.key apart from the preceding files. For details on TLS authentication, see Advanced Settings.</p>
Server Log	Click Export to export server log files, including the server start time and client dial-up logs.

Caution

The IP address range of the device cannot overlap the network segment of the LAN port on the device.

OpenVPN [Tunnel List](#)

Tunnel List					
<input type="checkbox"/>	Username	Server/Client	Status	Real IP Address	Virtual IP Address
<input type="checkbox"/>	openvpn	Server	OK	172.26.30.192	10.80.12.1

2. Advanced Settings

Click **Expand** to configure the advanced parameters. Keep the default settings unless otherwise specified.

[Collapse](#)

TLS Authentication ?

Allow Data Compression ?

Route All Traffic over VPN ?

Cipher ?

Deliver DNS ? +

Auth

Table 8-20 OpenVPN server advanced settings

Parameter	Description
TLS Authentication	Specify the TLS key for enhanced OpenVPN security by allowing the communicating parties to possess the shared key before TLS handshake. After TLS authentication is enabled, you must import the TLS key on the client. (The version of the peer OpenVPN client must be higher than 2.40.)
Allow Data Compression	Specify whether to enable data compression. If this function is enabled, transmitted data is compressed using the LZO algorithm. Data compression saves bandwidth but consumes certain CPU resources. The setting on the client must be the same as that on the server. Otherwise, the connection fails.
Route All Traffic over VPN	Specify whether to route all traffic over VPN. After this function is enabled, all the traffic is routed over the VPN tunnel. This means that the VPN tunnel is the default route.

Parameter	Description
Cipher	<p>Select the data encryption mode before data transmission to ensure that even data packets are intercepted during transmission, the leaked data cannot be interpreted.</p> <p>If this parameter is set to Auto on the server, you can set this parameter to any option on the client.</p> <p>If a specific encryption algorithm is configured on the server, you must select the same encryption algorithm on the client. Otherwise, the connection fails.</p>
Deliver DNS	Specify the DNS server address pushed by the server to clients. Currently, the device can push the DNS server address to Windows clients only.
Auth	Specify the MD5 algorithm used by the server. The server will inform the clients of this information. The default value is SHA1 .

3. Configuring OpenVPN User

Choose **Local Device > VPN > VPN Clients**.

Only user accounts added to the VPN client list are allowed to dial up to connect to the OpenVPN server. Therefore, you need to manually configure user accounts for clients to access the OpenVPN server.

Click **Add**. In the dialog box that appears, set **Service Type** to **OpenVpn**, enter the username and password, and click **OK**. The **Status** parameter specifies whether to enable the user account.

VPN Clients

VPN Client List **+ Add**

Up to 100 entries can be added.

<input type="checkbox"/>	Username	Password	Service Type	Network Mode	Peer Subnet	Status	Action
<input type="checkbox"/>	test	test	ALL	PC to Router	-	Enable	Edit Delete
<input type="checkbox"/>	pptp@branch	branch	PPTP	Router to Router	192.168.12.0/24	Enable	Edit Delete

8.4.3 Configuring the OpenVPN Client

Choose **Local Device > VPN > OpenVPN**.

Currently, you can configure the device as the OpenVPN client in either of the following methods:

Web Settings: Configure OpenVPN client on the web page. This method is used when the device is connected to a non-EG server.

Import Config: Manually import the configuration file. This method is used when the device is connected to a similar device. The client configuration file **client.ovpn** can be directly exported from the connected OpenVPN server.

1. Import Config

Turn on **Enable** to enable the OpenVPN function, set **OpenVPN Type** to **Client** and **Client Config** to **Import Config**, select a server mode, set relevant parameters, and click **Browse** to import the client configuration file. Then, click **Save** to make the configuration take effect.

The screenshot shows the 'OpenVPN' configuration page under 'Tunnel List'. It features an information icon and the title 'OpenVPN'. There is an 'Enable' toggle switch which is turned on. Under 'OpenVPN Type', the 'Client' radio button is selected. Under 'Client Config', the 'Import Config' radio button is selected. The 'Server Mode' dropdown menu is set to 'Account'. There are two required input fields: '* Username' and '* Password', both containing placeholder text 'Username of OpenVpn user' and 'Password of OpenVpn user' respectively. Below these is a 'Client Config' input field with '.ovpn' and a 'Browse' button. A message 'It already exists.' is displayed next to the 'Browse' button. At the bottom, there is a 'Client Log' section with an 'Export' button and a large blue 'Save' button.

Table 8-21 OpenVPN client configuration in Import Config method

Parameter	Description
Server Mode	<p>Select a server authentication mode. The options are Account, Certificate, Account & Certificate and Pre-Shared Key.</p> <ul style="list-style-type: none"> ● Account: Enter the correct username and password and upload the CA certificate on the client. The CA certificate information is embedded in the client configuration file. ● Certificate: Upload the CA certificate and client certificate and enter the correct private key on the client. All the information is embedded in the client configuration file. ● Account & Certificate: Enter the correct username, password, and private key and upload the CA certificate, and client certificate on the client. The information of the CA certificate, client certificate, and private key is embedded in the client configuration file. ● Pre-Shared Key: Upload the pre-shared key file apart from the client configuration file.
Username & Password	Enter the username and password configured on the server.
Client Config	Click Browse , select the client configuration file exported from the server, and upload the file.

Parameter	Description
Pre-Shared Key	Click Browse , select the pre-shared key file, and upload the file.
Workmode	This parameter is available only when Server Mode is set to Pre-Shared Key . NAT: The client can access the server network, but the server cannot access the client network. Router: The server can access the client network.
Client Log	Click Export to export the client log file.

2. Web Settings

Turn on **Enable** to enable the OpenVPN function, set **OpenVPN Type** to **Client** and **Client Config** to **Web Settings**, configure parameters such as **Device Mode** and **Device Mode**, and click **Save** to make the configuration take effect.

(1) Basic Settings

OpenVPN Tunnel List

OpenVPN

Enable

OpenVPN Type Server Client

Client Config Import Config Web Settings

Device Mode

Server Mode

* Username

* Password

Protocol

* Server Address

* Server Port ID 1-65535

----- Expand -----

Table 8-22 OpenVPN client configuration in Web Settings method

Parameter	Description
Device Mode	Specify the mode of the EG device that functions as a client. The options are TUN and TAP . The value must be the same as that configured on the server. When the EG device works as a server, it supports the TUN mode only.
Server Mode	Select a client authentication mode. The options are Account , Certificate , and Account & Certificate . <ul style="list-style-type: none"> ● Account: Enter the correct username and password and upload the CA certificate on the client. ● Certificate: Upload the correct CA certificate, client certificate, and private key file on the client. ● Account & Certificate: Enter the correct username and password, and upload the CA certificate, client certificate, and private key file on the client.

Parameter	Description
Protocol	Select the protocol running on the device. The options are UDP and TCP . The value must be the same as that configured on the server.
Username & Password	Enter the username and password configured on the server. You must configure this parameter when Server Mode is set to Account or Account & Certificate .
Server Address	Enter the address or domain name of the server to be connected.
Server Port ID	Enter the port number of the server to be connected.
CA Certificate	Click Browse , select the CA certificate file with the file name extension .ca , and upload the file. You must configure this parameter when Server Mode is set to Certificate or Account & Certificate .
Client Key	Click Browse , select the client private file with the file name extension .key , and upload the file. You must configure this parameter when Server Mode is set to Certificate or Account & Certificate .
Client Certificate	Click Browse , select the client certificate file with the file name extension .crt , and upload the file. You must configure this parameter when Server Mode is set to Certificate or Account & Certificate .
Client Certificate Key	Specify the client certificate key if the client certificate provided by the server (such as the MikroTik server) is encrypted twice. You must configure this parameter when Server Mode is set to Certificate or Account & Certificate .
Client Log	Click Export to export the client log file.

(2) Advanced Settings

Click **Expand** to configure the advanced parameters. Keep the default settings unless otherwise specified.

----- Collapse -----

Use Explicit Signature for ?

Server Certificate

TLS Authentication ?

Cipher ?

Auth ?

Allow Data Compression ?

Use Route Pushed by ?

Server

Table 8-23 OpenVPN client configuration in Web Settings method

Parameter	Description
Use Explicit Signature for Server Certificate	Specify whether to verify the server certificate using explicit signature. By default, this function is enabled. If the server certificate does not use explicit signature, for example, the MikroTik server, you need to disable this function. Otherwise, the connection fails.
TLS Authentication	Specify whether to enable TLS authentication for the server. If this function is enabled, you need to upload the TLS certificate file.
Cipher	Select a data compression algorithm. The value must be the same as that configured on the server. Otherwise, the connection fails.
Auth	Select an MD5 algorithm for data packet verification. The options are SHA1 , MD5 , SHA256 , and NULL . The value must be the same as that configured on the server. Otherwise, the connection fails.
Allow Data Compression	Specify whether to allow data compression. After this function is enabled, the transmitted data can be compressed by using the LZO algorithm. The value must be the same as that configured on the server.


Parameter	Description
Use Route Pushed by Server	Specify whether to use the routes pushed by the server. If this function is disabled, the device cannot accept the routes pushed by the server. If the server needs to access LAN devices, you must set this parameter to Yes .

8.4.4 Viewing the OpenVPN Tunnel Information

Choose **Local Device > VPN > OpenVPN > Tunnel List**.

After the server and client are configured, you can view the OpenVPN tunnel connection status. If the tunnel is established successfully, the client tunnel information is displayed in the tunnel list of the server.

OpenVPN [Tunnel List](#)

 Tunnel List

<input type="checkbox"/>	Username	Server/Client	Status	Real IP Address	Virtual IP Address
<input type="checkbox"/>	openvpn	Server	OK	172.26.30.192	10.80.12.1

Table 8-24 OpenVPN tunnel information


Parameter	Description
Username	Indicate the username used by the client for identity authentication. By default, the username displayed on the server is openvpn .
Server/Client	Indicate the role of the local end of the tunnel, which can be client or server.
Status	Indicate the tunnel establishment status.
Real IP Address	Indicate the real IP address used by the local end to connect to the VPN.
Virtual IP Address	Indicate the local virtual IP address of the tunnel. The virtual IP address of the OpenVPN client is allocated by the OpenVPN server.

8.4.5 Typical Configuration Example

1. Networking Requirements

The enterprise wants to allow the client network to dial up to the server through OpenVPN, implementing mutual access between the server and client.

2. Networking Diagram

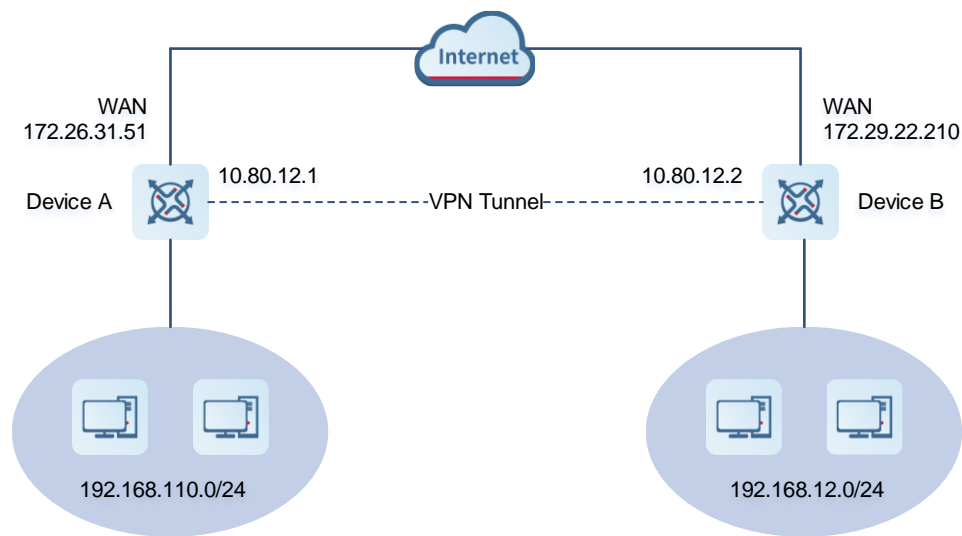


3. Configuration Roadmap

- Configure Device A as the OpenVPN server.
- Configure Device B as the OpenVPN client.
- The server needs to push the local LAN network segment to the client to allow the client to access the server in the LAN.

4. Configuration Steps

(1) Configure Device A.

- Log in to the web management system and choose VPN > OpenVPN > OpenVPN to access the OpenVPN page.

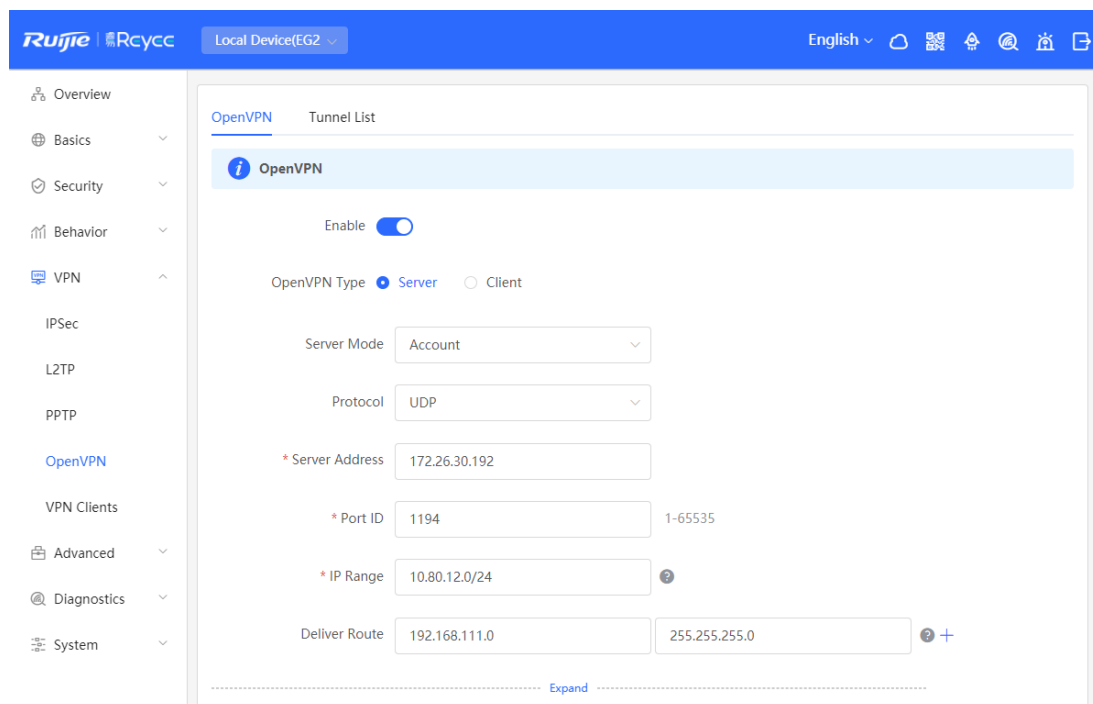

- b Turn on Enable to enable the OpenVPN function, set OpenVPN Type to Server, select a server mode and protocol, enter the port number (1194 by default) and server address (external IP address of the local device), and click Save.

i
OpenVPN

Enable

OpenVPN Type Server Client

Server Mode

Protocol

* Server Address

* Port ID 1-65535

* IP Range ?

Deliver Route ? +

Expand

Client Config

Server Log

Table 8-25 OpenVPN server configuration

Parameter	Description
Server Mode	Select an authentication mode. In this example, select Account . In scenarios with high security requirements, select Account & Certificate .
Protocol	Select UDP unless otherwise specified. When the network status between two encrypted tunnel ends is poor, such as high latency or heavy packet loss, select TCP .
Server Address	Enter the WAN port address of the server, that is 172.26.31.51 .
Port ID	The default value is 1194 . Keep the default value unless otherwise specified. If the port is in use of disabled in the current network, change to an available port number.

Parameter	Description
IP Range	Specify the network segment of the OpenVPN address pool. The first available in the address pool is allocated to the server, and the other addresses are allocated to clients. For example, if this parameter is set to 10.80.12.0/24 , the VPN virtual address of the server is 10.80.12.1.
Deliver Route	Add routes to the corresponding network segment if the client wants to the LAN network segment where the server resides.

- c Click Expand to configure more advanced parameters. If the device connects to other EG devices in the Reeye network, you are advised to keep the default values for advanced settings. If the device connects to devices from another vendor, keep the parameter settings consistent on the connected devices.

[Collapse](#)

TLS Authentication ?

Allow Data Compression Yes ?

Route All Traffic over VPN No ?

Cipher AES-128-CBC ?

Deliver DNS Example: 1.1.1.1 +

Auth SHA1

- d Click Export to export the compressed package of the client parameter configuration. Download the compressed package to the local device and decompress it for setting the OpenVPN client in subsequent steps.

Client Config

Server Log

- e Choose **VPN > VPN Clients** and add an OpenVPN user account.

VPN Clients ?

VPN Client List

Up to **100** entries can be added.

<input type="checkbox"/>	Username	Password	Service Type	Network Mode	Peer Subnet	Status	Action
--------------------------	----------	----------	--------------	--------------	-------------	--------	--------

Add User ×

Service Type

* Username

* Password 👁

Status

(2) Configure Device B.

- a Log in to the web management system and access the OpenVPN page.
- b Turn on Enable to enable the OpenVPN function and set OpenVPN Type to Client. Two methods are available for configuring the client. The Import Config method is recommended.

Import Config:

OpenVPN Tunnel List

OpenVPN

Enable

OpenVPN Type Server Client

Client Config Import Config Web Settings

Server Mode

* Username

* Password

Client Config [It already exists.](#)

Client Log

Table 8-26 OpenVPN client configuration in Import Config method

Parameter	Description
Client Config	Select Import Config .
Server Mode	The value must be the same as that on the server. In this example, select Account .
Username & Password	Enter the username and password configured on the server.
Client Config	Click Browse , select the client configuration file exported from the server, and upload the file.

Web Settings:

i **OpenVPN**

Enable

OpenVPN Type Server Client

Client Config Import Config Web Settings

Device Mode

Server Mode

* Username ?

* Password ?

Protocol

* Server Address

* Server Port ID 1-65535

Table 8-27 OpenVPN client configuration in Web Settings method

Parameter	Description
Client Config	Select Web Settings .
Device Mode	The value must be the same as that on the server. In this example, select TUN .
Server Mode	The value must be the same as that on the server. In this example, select Account .
Username & Password	Enter the username and password configured on the server.
Protocol	The value must be the same as that on the server. In this example, select UDP .
Server Address	Enter the public network IP address of the server, that is 172.26.31.51 .
Server Port ID	Enter the port number used by the server, such as 1194 .

Import the corresponding files according to the value of **Server Mode**.

If **Server Mode** is set to **Certificate** or **Account & Certificate**, you need to import the CA certificate file, client certificate file, and client private key file. If **Server Mode** is set to **Account**, you only need to import the CA certificate file. If the client certificate is encrypted, you also need to enter the pre-shared key specified by **Client Certificate Key**.

CA Certificate	<input type="text" value=".cert"/>	<input type="button" value="Browse"/>
Client Key	<input type="text" value=".key"/>	<input type="button" value="Browse"/>
Client Certificate	<input type="text" value=".cert"/>	<input type="button" value="Browse"/>
Client Certificate Key	<input type="text"/>	<input type="button" value="?"/>

Click **Expand** to configure more parameters. Configure **Use Route Pushed by Server** to specify whether to accept routes pushed by the server. The value must be the same as that on the server. If the client is connected to a non-EG device, such as MikroTik server outside China, you need to turn off **Use Explicit Signature for Server Certificate**.

[Collapse](#)

Use Explicit Signature for Server Certificate	<input checked="" type="checkbox"/>	<input type="button" value="?"/>
TLS Authentication	<input type="checkbox"/>	<input type="button" value="?"/>
Cipher	<input type="text" value="AES-128-CBC"/>	<input type="button" value="?"/>
Auth	<input type="text" value="SHA1"/>	<input type="button" value="?"/>
Allow Data Compression	<input type="text" value="Yes"/>	<input type="button" value="?"/>
Use Route Pushed by Server	<input type="text" value="Yes"/>	<input type="button" value="?"/>

- c After the configuration is completed, click Save to make the configuration take effect.

5. Verifying Configuration

After the server and client are configured, view the two tunnel end information in the tunnel list.

Client:

OpenVPN Tunnel List					
Tunnel List					
<input type="checkbox"/>	Username	Server/Client	Status	Real IP Address	Virtual IP Address
<input type="checkbox"/>	456	Client	OK	172.26.31.53	10.80.12.3

Server:

OpenVPN [Tunnel List](#)

Tunnel List

<input type="checkbox"/>	Username	Server/Client	Status	Real IP Address	Virtual IP Address
<input type="checkbox"/>	openvpn	Server	OK	172.26.31.51	10.80.12.1
<input type="checkbox"/>	456	Client	OK	172.26.31.53	10.80.12.3

9 Configuring PoE

Caution

This feature is supported by only the models ending with -P, for example, RG-EG105G-P and RG-EG210G-P.

Choose **Local Device > Basics > PoE**.

The device supplies power to PoE powered devices through ports. You can check the total power, current consumption, remaining consumption, and whether PoE power supply status is normal. Move the cursor over a port. The **PoE** toggle appears. You can click it to control whether to enable PoE on the port.

The screenshot displays the PoE configuration interface. At the top, there is a blue header bar with an information icon and the text "PoE". Below this is a section titled "PoE Consumption Details" containing three light blue boxes: "Max Consumption" with a value of 70.0W, "Current Consumption" with a value of 0.0W, and "Remaining Consumption" with a value of 70.0W. The next section is "PoE Device Panel", which includes three status icons: "Powered On" (blue), "Powered Off" (grey), and "PoE Error" (red). Below these icons is a row of eight port status cards, each showing a power icon and a "Current Consumption: 0.0W" value. The ports are labeled LAN0, LAN1, LAN2, LAN3, LAN4, LAN5, LAN6/WAN3, and LAN7/WAN2. A tooltip is visible over the LAN5 port, showing "Current Consumption: 0.0W" and a "PoE" toggle switch that is currently turned on.

10 System Management

10.1 Setting the Login Password


Turn off **Self-Organizing Network Discovery**. Choose **System > Login > Login Password**.

Turn on **Self-Organizing Network Discovery**. Choose **Network > System > Login Password**.

Enter the old password and new password. After saving the configuration, log in again using the new password.

Caution

In the self-organizing network mode, the login password of all devices in the network will be changed synchronously.

 Change the login password. Please log in again with the new password later.

* Old Password

* New Password


* Confirm Password

Save

10.2 Setting the Session Timeout Duration

Choose **Local Device > System > Login > Session Timeout**.

If no operation is performed on the Web page within a period of time, the session is automatically disconnected. When you need to perform operations again, enter the password to log in again. The default timeout duration is 3600 seconds, that is, 1 hour.

 **Session Timeout**

* Session Timeout

3600

seconds


Save

10.3 Restoring Factory Settings

10.3.1 Restoring the Current Device to Factory Settings

Choose **Local Device** > **System** > **Management** > **Reset**.

Click **Reset** to restore the current device to the factory settings.

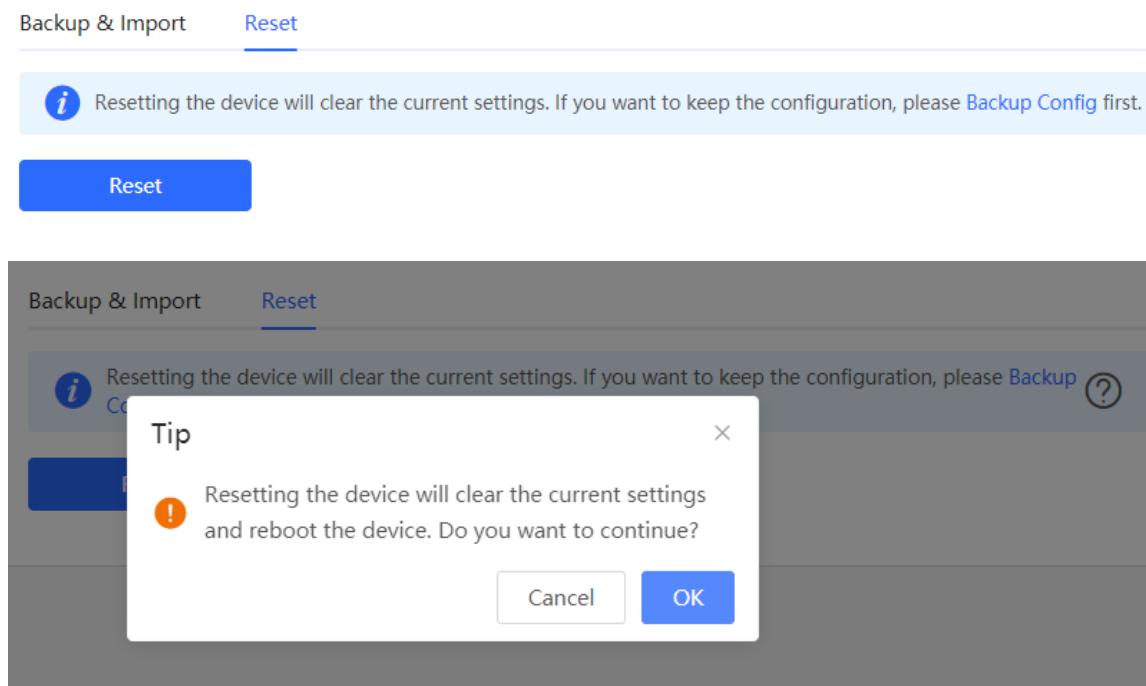


Caution

The operation will clear all configuration of the current device. If you want to retain the current configuration, back up the configuration first. (For details, see [Configuring Backup and Import](#).) Therefore, exercise caution when performing this operation.

10.3.2 Restoring All Devices to Factory Settings

Choose **Network** > **System** > **Management** > **Reset**.

Click **All Devices**, select whether to enable **Unbind Account**, and click **Reset All Devices**. All devices in the network will be restored to factory settings.

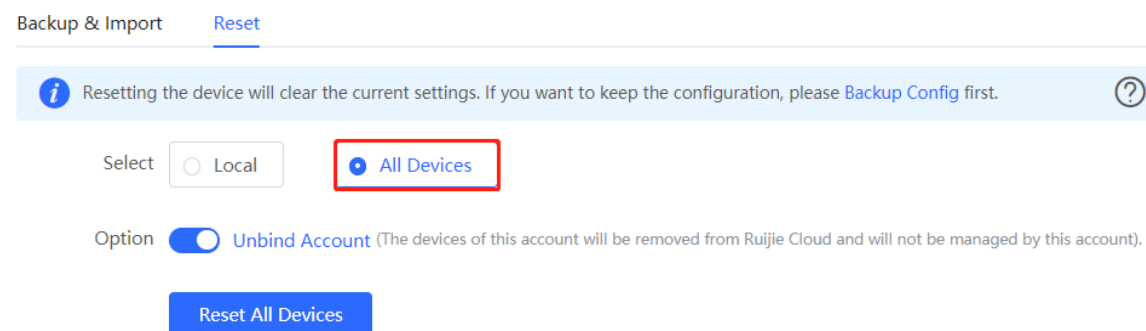

Caution

The operation will clear all configuration of all devices in the network. Therefore, exercise caution when performing this operation.


10.4 Configuring Reboot

10.4.1 Rebooting the Current Device

Choose **Local Device** > **System** > **Reboot** > **Reboot**.

Click **Reboot**, and the device will be restarted. Please do not refresh or close the page during the reboot process. After the device is rebooted, the browser will be redirected to the login page.

[Reboot](#) [Scheduled Reboot](#)

 Please keep the device powered on during reboot.


[Reboot](#)

10.4.2 Rebooting All Devices in the Network

Choose **Local Device** > **System** > **Reboot** > **Reboot**.

Select **All Devices**, and click **Reboot All Device** to reboot all devices in the current network.

[Reboot](#) [Scheduled Reboot](#)

 Please keep the device powered on during reboot.

Select Local All Devices Specified Devices

[Reboot All Device](#)

Caution

The operation takes some time and affects the whole network. Therefore, exercise caution when performing this operation.

10.4.3 Rebooting the Specified Device

Choose **Local Device** > **System** > **Reboot** > **Reboot**.

Click **Specified Devices**, select required devices from the **Available Devices** list, and click **Add** to add devices to the **Selected Devices** list on the right. Click **Reboot**. Specified devices in the **Selected Devices** list will be rebooted.

Reboot Scheduled Reboot

i Please keep the device powered on during reboot. ?

Select Local All Devices Specified Devices

Available Devices 1/1

Search by SN/Model

1234567891234 - EG210G-P

< Delete

Add >

Selected Devices 0/0

Search by SN/Model

No data

Reboot

10.5 Configuring Scheduled Reboot

Confirm that the system time is accurate to avoid network interruption caused by device reboot at wrong time. For details about how to configure the system time, see Section [9.6 Setting and Displaying System Time](#).

Choose **System > Reboot > Scheduled Reboot**.

Turn on **Enable**, and select the date and time of scheduled reboot every week. Click **Save**. When the system time matches the scheduled reboot time, the device will restart. You are advised to set scheduled reboot time to off-peak hours.

Caution

The operation affects the whole network. Therefore, exercise caution when performing this operation.

Reboot Scheduled Reboot

i It is recommended to set the scheduled time to a network idle time, e.g., 2 A.M..
The downlink device will also be rebooted as scheduled.

Enable

Day Mon Tue Wed Thu Fri Sat Sun

Time 03 : 00

Save

10.6 Setting and Displaying System Time

Choose **System** > **System Time**.

You can view the current system time. If the time is incorrect, check and select the local time zone. If the time zone is correct but time is still incorrect, click **Edit** to manually set the time. In addition, the device supports Network Time Protocol (NTP) servers. By default, multiple servers serve as the backup of each other. You can add or delete the local server as required.

i Configure and view system time (The device has no RTC module. The time settings will not be saved upon reboot). ?

Current Time 2022-04-27 12:38:30 Edit

* Time Zone ▼

* NTP Server Add

Delete

Delete

Delete

Delete

Delete

Delete

Save

Click **Current Time**, and the current system time will be filled in automatically.

Edit ×

* Time Current Time

Cancel
OK



10.7 Configuring Backup and Import

Choose **System** > **Management** > **Backup & Import**.

Configuration backup: Click **Backup** to download a configuration file locally.

Configuration import: Click **Browse**, select a backup file on the local PC, and click **Import** to import the configuration file. The device will restart.

[Backup & Import](#)[Reset](#)

 If the target version is much later than the current version, some configuration may be missing. It is recommended to choose [Reset](#) before importing the configuration. The device will be rebooted automatically later. 

Backup Config

Backup Config

[Backup](#)

Import Config


File Path

[Browse](#)[Import](#)

10.8 Configuring LED Status Control

Choose **Network > LED**.

Turn on **Enable** and click **Save** to deliver the configuration.

 **LED Status Control**
Control the LED status of **the downlink AP**.

Enable [Save](#)


10.9 Configuring Diagnostics

10.9.1 Network Check


When a network error occurs, perform **Network Check** to identify the fault and take the suggested action.

Choose **Local Device > Diagnostics > Network Check**.


Click **Start** to perform the network check and show the result.

 **Network Check**

[Start](#)

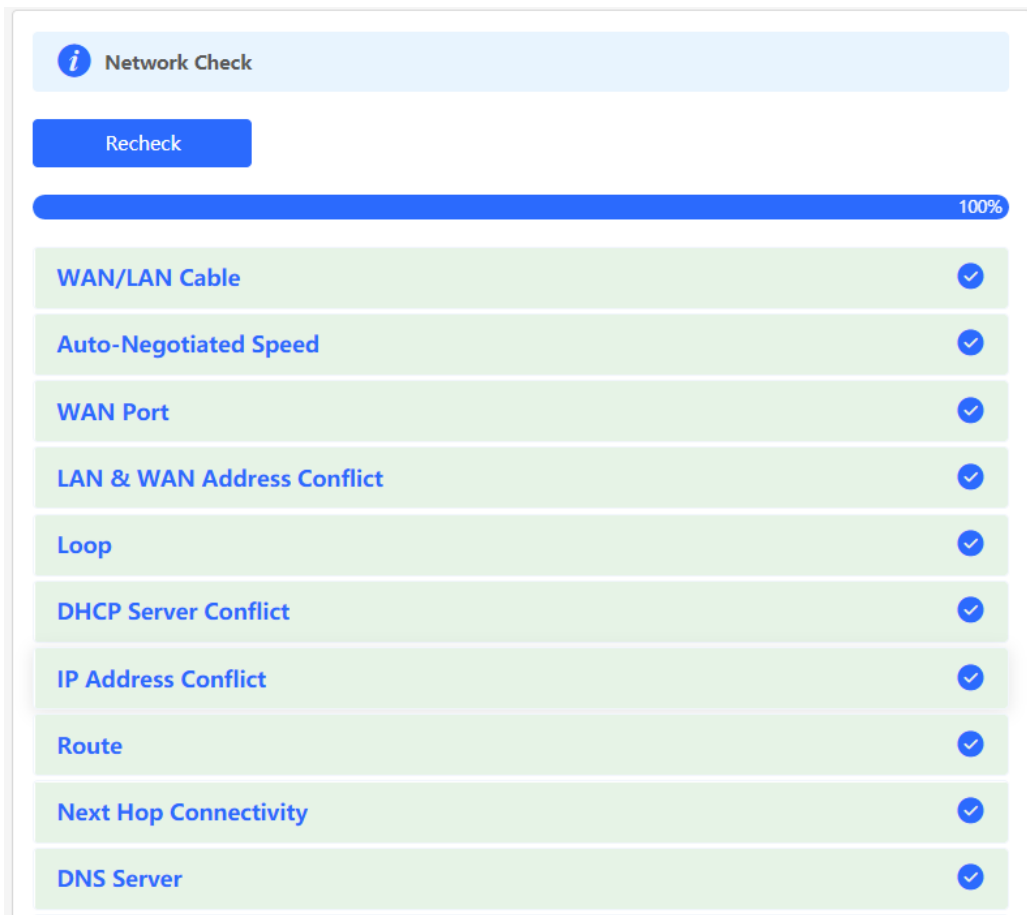

If a network error occurs, its symptom and suggested action will be displayed.

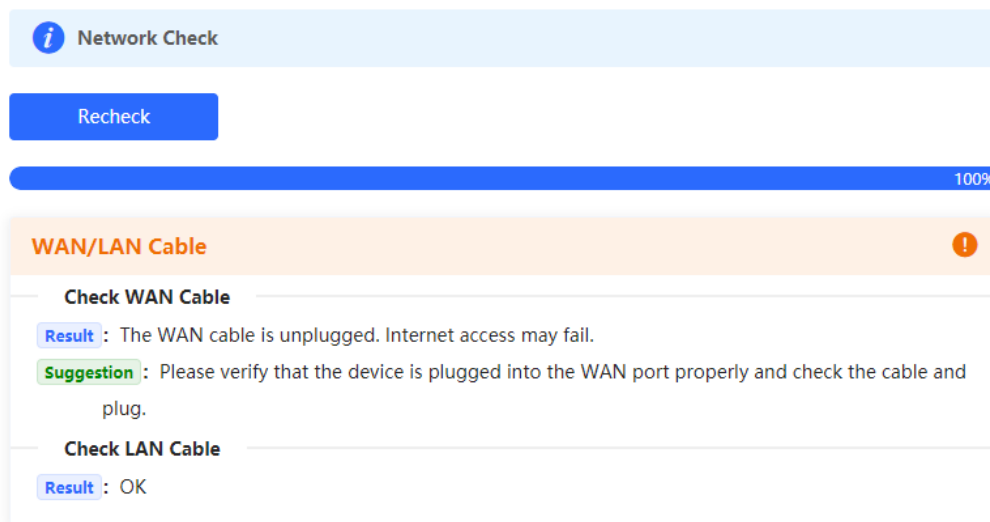

10.9.2 Alerts

Choose **Network > Alerts**.

The **Alert List** page displays possible problems on the network environment and device. All types of alerts are followed by default. You can click **Unfollow** in the **Action** column to unfollow this type of alert.

 **Caution**

After unfollowing a specified alert type, you will not discover and process all alerts of this type promptly. Therefore, exercise caution when performing this operation.

Alert List
[View Unfollowed Alert](#)

Expand	Alerts	Suggestion	Action
▼	There is more than one DHCP server in the LAN network.	Please disable the extra DHCP server in the LAN network.	Delete Unfollow

Hostname	SN	Type	Time	Details	Action
Ruijie	1234567891234	EG210G-P	2022-04-24 09:39:08	A DHCP server conflict occurs in LAN network: MAC:58:69:6c:00:00:01,1 P:192.168.11.1,VLAN ID:233; MAC:UNKNOWN,IP:192.168.112.1,VLAN ID:233	Delete

Click **View Unfollowed Alert** to view the unfollowed alert. You can follow the alert again in the pop-up window.

View Unfollowed Alert
×

There is more than one DHCP server in the LAN network.

[Re-follow](#)

Cancel

10.9.3 Network Tools

Choose **Local Device > Diagnostics > Network Tools**.

Select a diagnostic method, enter an IP address or URL, and click **Start**.

The ping method is used to test the connectivity between the tested device and the specified IP address or URL. If ping fails, the device is not connected to the IP address or URL.

The traceroute method is used to trace network paths to the specified IP address or URL. The DNS lookup method is used to check the DNS server address for URL parsing.

Network Tools ?

Tool Ping Traceroute DNS Lookup

* IP Address/Domain

* Ping Count

* Packet Size Bytes

```
PING 172.26.1.1 (172.26.1.1): 64 data bytes
72 bytes from 172.26.1.1: seq=0 ttl=64 time=4.675 ms
72 bytes from 172.26.1.1: seq=1 ttl=64 time=2.199 ms
72 bytes from 172.26.1.1: seq=2 ttl=64 time=2.202 ms
72 bytes from 172.26.1.1: seq=3 ttl=64 time=2.212 ms

--- 172.26.1.1 ping statistics ---
4 packets transmitted, 4 packets received, 0% packet loss
round-trip min/avg/max = 2.199/2.822/4.675 ms
```

10.9.4 Packet Capture

Choose **Local Device > Diagnostics > Packet Capture**.

If the device fails and troubleshooting is required, the packet capture result can be analyzed to locate and rectify the fault.

Select an interface and a protocol and specify the host IP address to capture the content in data packets. Select the file size limit and packet count limit to determine the conditions for automatically stopping packet capture. (If the file size or number of packets reaches the specified threshold, packet capture stops and a diagnostic package download link is generated.) Click **Start** to execute the packet capture command.

Caution

The packet capture operation may occupy many system resources, causing network freezing. Therefore, exercise caution when performing this operation.

i Packet Capture ?

Interface

Protocol

IP Address

File Size Limit Available Memory **177.63 M**

Packet Count Limit

Start **Stop**

Packet capture can be stopped at any time. After that, a download link is generated. Click this link to save the packet capture result in the PCAP format locally. Use analysis software such as Wireshark to view and analyze the result.

i Packet Capture ?

Interface

Protocol

IP Address

File Size Limit Available Memory **177.63 M**

Packet Count Limit

File Size: 78.02K
Captured on: 2022-04-27 12:50:07


PCAP file [Click to download the PCAP file.](#) **i**
[Click to delete the file.](#)

Start **Stop**

10.9.5 Fault Collection

Choose **Local Device > Diagnostics > Fault Collection**.

When the device fails, you need to collect the fault information. Click **Start**. The configuration files of the device will be packed into a compressed file. Download the compressed file locally and provide it to R&D personnel for fault locating.

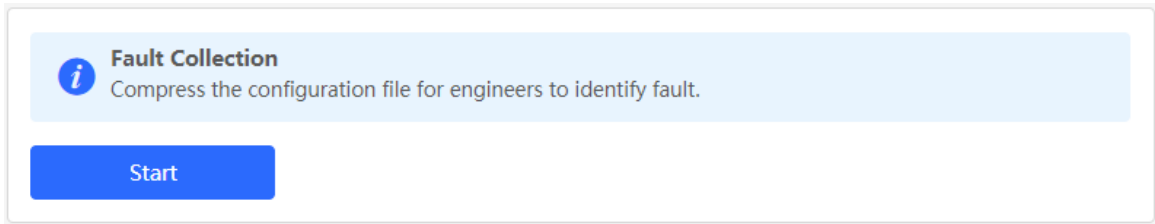

10.10 Performing Upgrade and Checking System Version

 **Caution**

You are advised to back up the configuration before upgrading the router.

Version upgrade will restart the device. Do not refresh or close the browser during the upgrade process.

10.10.1 Online Upgrade

Choose **Local Device > System > Upgrade > Online Upgrade**.


The current page displays the current system version and allows you to detect whether a later version is available. If a new version is available, click **Upgrade Now** to perform online upgrade. If the network environment does not support online upgrade, click **Download File** to download the upgrade installation package locally and then perform local upgrade.


 **Note**


Online upgrade will retain the current configuration.

Do not refresh the page or close the browser during the upgrade process. After successful upgrade, you will be redirected to the login page automatically.

[Online Upgrade](#) Local Upgrade

 Online upgrade will keep the current configuration. Please do not refresh the page or close th

Current Version ReyeeOS 1.86. 

New Version **ReyeeOS 1.** 

Description 1. 
 2. 


- Tip 1. If your device cannot access the Internet, please click [Download File](#).
 2. Choose [Local Upgrade](#) to upload the file for local upgrade.

[Upgrade Now](#)

10.10.2 Local Upgrade

Choose **Local Device** > **System** > **Upgrade** > **Local Upgrade**.


You can view the current software version and device model. If you want to upgrade the device with the configuration retained, select **Keep Config**. Click **Browse**, select an upgrade package on the local PC, and click **Upload** to upload the file. The device will be upgraded.

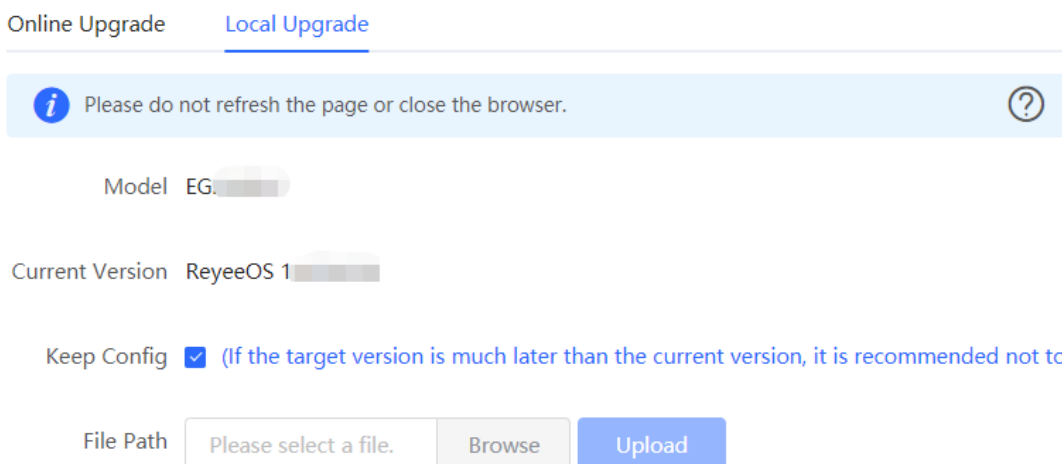

10.11 Switching System Language

Click **English** in the upper-right corner of the Web page.

Click a required language to switch the system language.

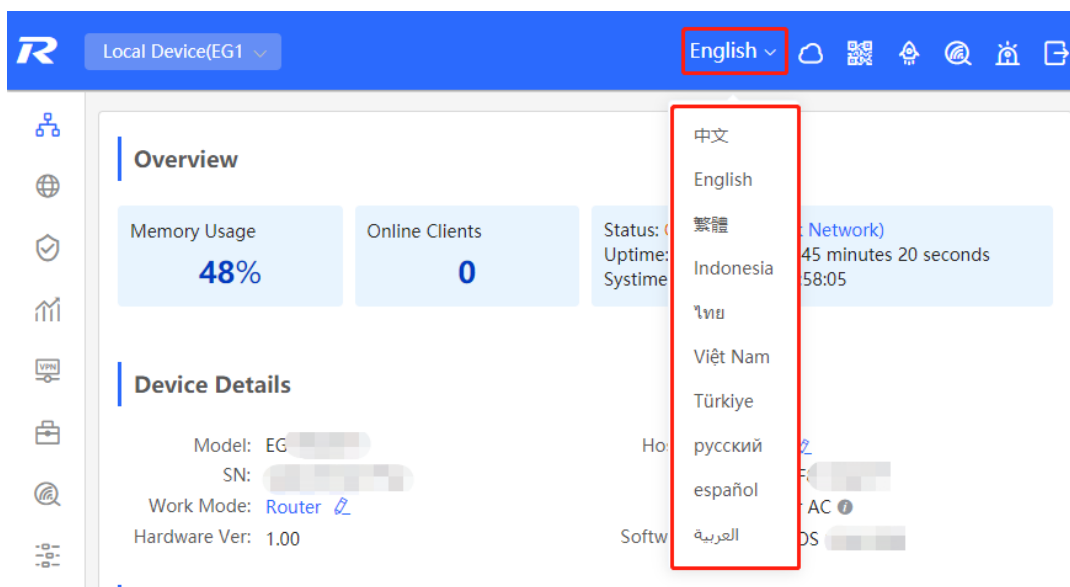

11 FAQs

11.1 Login Failure

➤ **What can I do if I fail to log in to the Web management system?**

- (1) Confirm that the network cable is correctly connected to the LAN port of the device, and the corresponding indicator is flashing or solid on.
- (2) Before you access the Web management system page, you are advised to configure the PC to automatically obtain an IP address, so the DHCP-enabled device automatically allocates an IP address to the PC. If you want to specify a static IP address to the PC, ensure that the IP address of the PC and the IP address of the device's LAN port are in the same network segment. For example, if the LAN port IP address is 192.168.110.1 and subnet mask is 255.255.255.0, set the PC IP address to 192.168.110.X (X representing any integer in the range of 2 to 254) and the subnet mask to 255.255.255.0.
- (3) Run the ping command to test the connectivity between the PC and device. If ping fails, check the network settings.
- (4) If you still cannot log in to the **Device Management** page after the preceding steps, restore the device to factory settings.

11.2 Password Loss/Factory Setting Restoration

➤ **What can I do if I forget the login password? How can I restore the device to factory settings?**

When the device is powered, press and hold the **Reset** button on the panel for 5 seconds. The device will restore factory settings after restart. Then, you can log in to the Web page of the device using the default IP address 192.168.110.1.

11.3 Internet Access Failure

➤ **What can I do if the Internet access through PPPoE Dial-Up fails?**

- (1) Check whether the PPPoE account and password are correct. Please see Section [1.5.3 Forgetting the PPPoE Account](#) for details.
- (2) Check whether the IP address allocated by the ISP conflicts with the IP address existing on the router.
- (3) Check whether the MTU setting of the device meets the requirements of the ISP.
The default MTU is 1500. Please see Section [3.2.3 Modifying the MTU](#) for details.
- (4) Check whether VLAN tagging should be configured for PPPoE.
VLAN tagging is disabled by default. Please see Section [3.2.5 Configuring the VLAN Tag](#) for details.